


GALILEO

Designed by Martin Opl

TECHNICAL SHEET

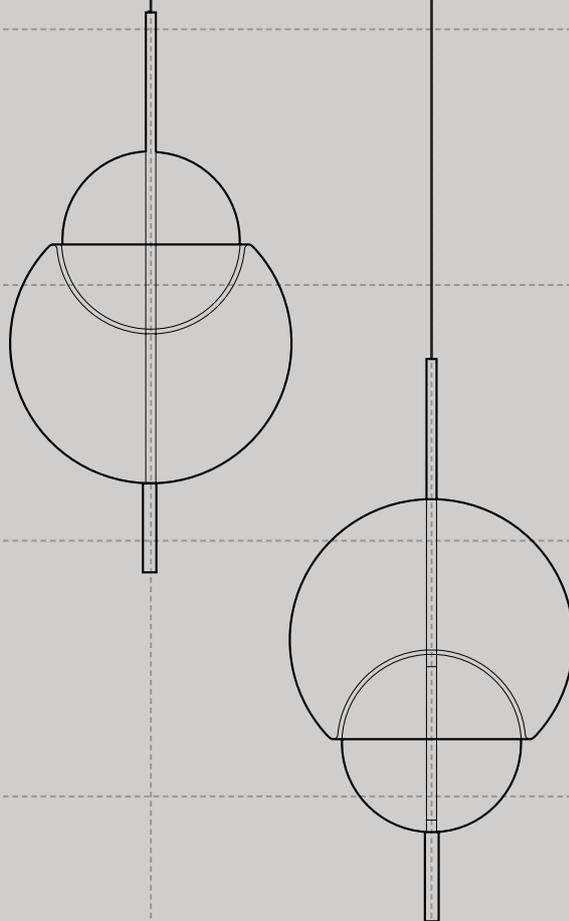

SANS SOUCI



TECHNICAL DETAILS

GLASS FINISHING

Main glass sphere:	Aurum/Argent/Rose with 25% transparency
Inner glass sphere:	Clear with sandblasting
Metal parts:	Polished stainless steel / Polished stainless steel with gold lacquer
Canopy included:	Yes
Usage:	Indoor

ELECTROTECHNICAL DETAILS

Cord colour:	Black
Cord length:	1800 mm
Light source type:	2x LED stripe
Socket:	Integrated LED
Light source included:	Yes
Colour temperature & Dimming:	3000 k / Dimmable
Input voltage:	220 - 240V AC / 24V DC (CE) 110 - 120V AC / 24V DC (UL)
Rated power:	5 W
Protection rating:	IP20


* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

** Lighting fixtures are designed for decorative purposes only.

*** Please contact your salesperson if you require compatibility with the DALI system.

**** For UL-compliant installations, a 4-inch junction box is recommended.

TECHNICAL DRAWINGS

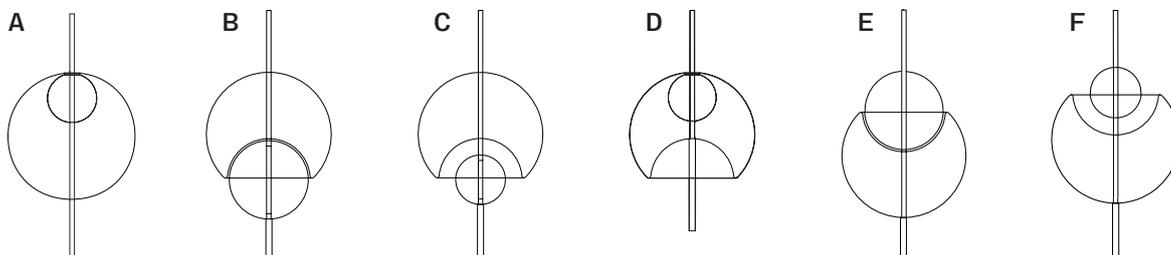

SIZE	Dia (mm/in)	Height (mm/in)
A	450/17,72	910/35,83
B	450/17,72	920/36,22
C	450/17,72	920/36,22
D	450/17,72	820/32,28
E	450/17,72	910/35,83
F	450/17,72	910/35,83

PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
A	550x530x570 / 216,5x208,7x224,4	9,0 / 19,8
B	520x500x740 / 204,7x197x291,4	9,2 / 20,3
C	520x500x740 / 204,7x197x291,4	9,5 / 21,0
D	560x530x570 / 220,5x208,7x224,4	9,5 / 21,0
E	520x500x740 / 204,7x197x291,4	9,5 / 21,0
F	520x500x740 / 204,7x197x291,4	9,5 / 21,0

Attention:

* The product requires professional installation.

** Warranty period depends on territory.



TECHNICAL DETAILS

GLASS FINISHING

Main glass sphere:	Aurum/Argent/Rose with 25% transparency
Inner glass sphere:	Clear with sandblasting
Metal parts:	Polished stainless steel / Polished stainless steel with gold lacquer
Canopy included:	Yes
Usage:	Indoor

ELECTROTECHNICAL DETAILS

Cord colour:	Black
Cord length:	1800 mm
Light source type:	LED stripe
Socket:	Integrated LED
Light source included:	Yes
Colour temperature & Dimming:	3000 k / Dimmable
Input voltage:	220 - 240V AC / 24V DC (CE) 110 - 120V AC / 24V DC (UL)
Rated power:	30 W
Protection rating:	IP20


* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

** Lighting fixtures are designed for decorative purposes only.

*** Please contact your salesperson if you require compatibility with the DALI system.

**** For UL-compliant installations, a 4-inch junction box is recommended.

TECHNICAL DRAWINGS

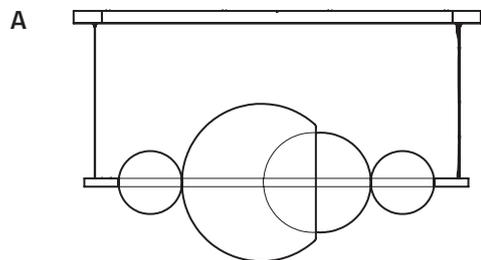

SIZE	Dia (mm/in)	Lenght (mm/in)	OH (mm/in)
A	450/17,72	1090/42,91	2000/78,74

PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
A	600x640x1200 / 23,62x25,20x47,24	39 / 85,98

Attention:

- * The product requires professional installation.
- ** Warranty period depends on territory.



TECHNICAL DETAILS

GLASS FINISHING

Main glass sphere:	Aurum/Argent/Rose with 25% transparency
Inner glass sphere:	Clear with sandblasting
Metal parts:	Polished stainless steel / Polished stainless steel with gold lacquer
Canopy included:	-
Usage:	Indoor

ELECTROTECHNICAL DETAILS

Cord colour:	Black
Cord length:	1800 mm
Light source type:	LED stripe
Socket:	Integrated LED
Light source included:	Yes
Colour temperature & Dimming:	3000 k / Dimmable
Input voltage:	220 - 240V AC / 24V DC (CE) 110 - 120V AC / 24V DC (UL)
Rated power:	5 W
Protection rating:	IP20


* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

** Lighting fixtures are designed for decorative purposes only.

*** Please contact your salesperson if you require compatibility with the DALI system.

**** For UL-compliant installations, a 4-inch junction box is recommended.

TECHNICAL DRAWINGS



SIZE	Dia (mm/in)	Hight (mm/in)
M	300/11,81	547/21,53

Attention:

- * The product requires professional installation.
- ** Warranty period depends on territory.

PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
M	Box 1: 395x395x580 / 15.55x15.55x22.83 Box 2: 210x210x580 / 8.27x8.27x22.83	9 / 19.8

Attention:

- * The product requires professional installation.
- ** Warranty period depends on territory.



TECHNICAL DETAILS

GLASS FINISHING

Main glass sphere:	Aurum/Argent/Rose with 25% transparency
Inner glass sphere:	Clear with sandblasting
Metal parts:	Polished stainless steel / Polished stainless steel with gold lacquer
Canopy included:	-
Usage:	Indoor

ELECTROTECHNICAL DETAILS

Cord colour:	Black
Cord length:	1800 mm
Light source type:	LED stripe
Socket:	Integrated LED
Light source included:	Yes
Colour temperature & Dimming:	3000 k / Dimmable
Input voltage:	220 - 240V AC / 24V DC (CE) 110 - 120V AC / 24V DC (UL)
Rated power:	5 W
Protection rating:	IP20

* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.


** Lighting fixtures are designed for decorative purposes only.

*** Please contact your salesperson if you require compatibility with the DALI system.

**** For UL-compliant installations, a 4-inch junction box is recommended.

TECHNICAL DRAWINGS

L

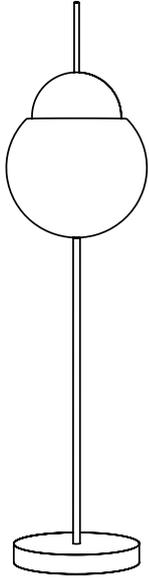

SIZE	Dia (mm/in)	Hight (mm/in)
L	400/15,74	1800/70,86

PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
L	Box 1: 160x560x750 / 6.30x22.05x29.53 Box 2: 430x430x750 / 16.93x16.93x29.53 Box 3: 385x85x1110 / 3.35x3.35x43.70	25 / 55.1

Attention:

* The product requires professional installation.

** Warranty period depends on territory.



TECHNICAL DETAILS

GLASS FINISHING

Main glass sphere:	Aurum/Argent/Rose with 25% transparency
Inner glass sphere:	Clear with sandblasting
Metal parts:	Polished stainless steel / Polished stainless steel with gold lacquer
Canopy included:	-
Usage:	Indoor

ELECTROTECHNICAL DETAILS

Cord colour:	-
Cord length:	1800 mm
Light source type:	2x LED stripe
Socket:	Integrated LED
Light source included:	Yes
Colour temperature & Dimming:	3000 k / Dimmable
Input voltage:	220 - 240V AC / 24V DC (CE) 110 - 120V AC / 24V DC (UL)
Rated power:	6 W
Protection rating:	IP20


* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

** Lighting fixtures are designed for decorative purposes only.

*** Please contact your salesperson if you require compatibility with the DALI system.

**** For UL-compliant installations, a 4-inch junction box is recommended.

TECHNICAL DRAWINGS

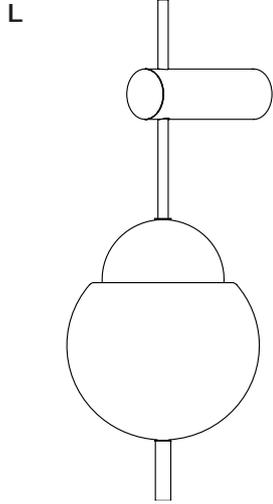

SIZE	Dia (mm/in)	Hight (mm/in)
M	400/15,74	1800/70,86

PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
M	395x395x610 / 15.55x15.55x24.02	7 / 15.4

Attention:

* The product requires professional installation.

** Warranty period depends on territory.

SANS SOUCI

Country of origin:
Czech Republic

Sans Souci s.r.o.
Vaclavske nam. 804/58,
110 00, Prague 1, Czech Republic

www.sanssoucilighting.com