

TECHNICAL SHEET

C-T3D60A | TALL 3 D60 A

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz

Source: Tubo / Tube LED 7W | Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005



C-T3D30A | TALL 3 D30 A

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz

Source: Tubo / Tube LED 7W | Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005



C-T2D60A | TALL 2 D60 A

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz


Source: Tubo / Tube LED 7W |

Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005

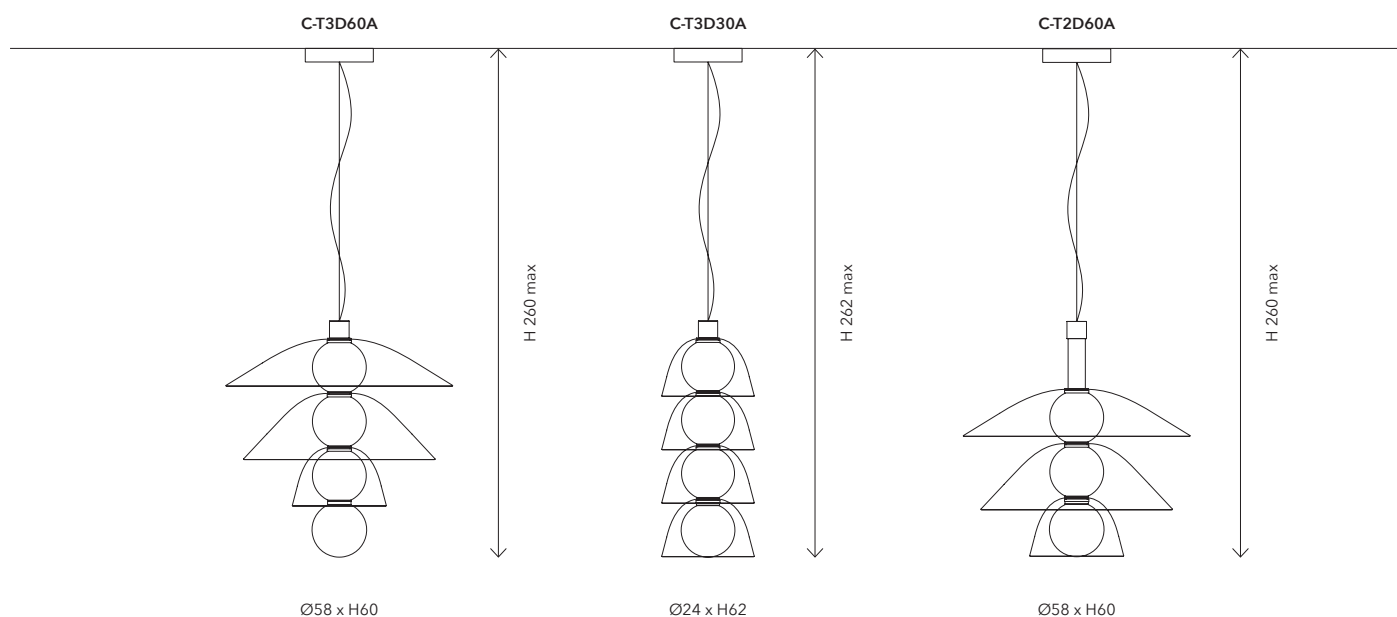

Finiture / Finishes

Struttura / Structure



Vetro bianco acidato
White etched glass

Sfere / Sphere



Vetro nero fumè
Black fumè glass



Vetro oro opaco
Matt gold glass



Vetro blu opaco
Matt blue glass



Vetro rosa opaco
Matt rose glass

Piatti / Plates



Vetro trasparente
Transparent glass



Vetro nero fumè
Black fumè glass



Vetro blu trasparente
Transparent blue glass



Vetro rosa trasparente
Transparent rose glass

NOTE:

Verificare quota H max nel disegno illustrativo

Check max H dimension in the illustrative drawing

TECHNICAL SHEET

C-S1D60A | SHORT 1 D60 A

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz

Source: Tubo / Tube LED 4,5W | Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005



C-S2D50A | SHORT 2 D50 A

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz

Source: Tubo / Tube LED 4,5W | Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005



C-S2D30A | SHORT 2 D30 A

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz


Source: Tubo / Tube LED 4,5W |

Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005

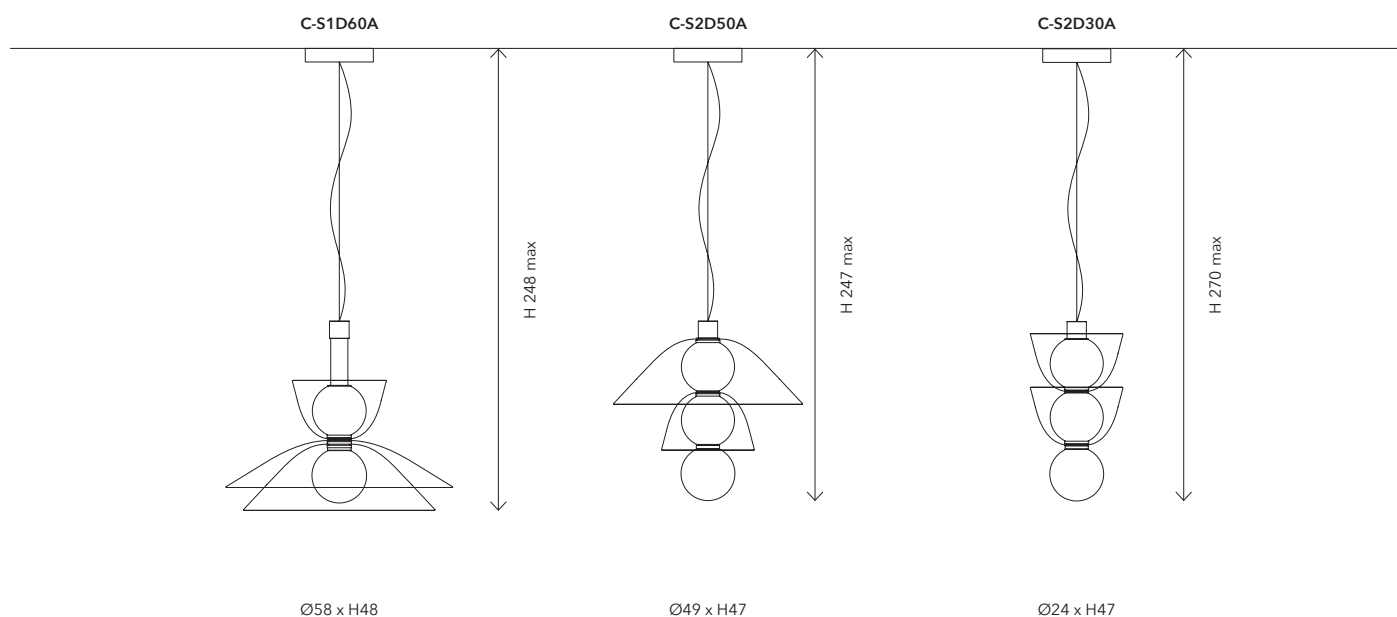

Finiture / Finishes

Struttura / Structure



Vetro bianco acidato
White etched glass

Sfere / Sphere



Vetro nero fumè
Black fumè glass



Vetro oro opaco
Matt gold glass




Vetro blu opaco
Matt blue glass



Vetro rosa opaco
Matt rose glass

Piatti / Plates



Vetro trasparente
Transparent glass



Vetro nero fumè
Black fumè glass



Vetro blu trasparente
Transparent blue glass



Vetro rosa trasparente
Transparent rose glass

NOTE:

Verificare quota H max nel disegno illustrativo

Check max H dimension in the illustrative drawing

TECHNICAL SHEET

C-S1D30A | SHORT 1 D30 A

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz

Source: Tubo / Tube LED 4,5W | Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005



C-S2D30B | SHORT 2 D30 B

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz

Source: Tubo / Tube LED 4,5W | Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005



C-S2D50B | SHORT 2 D50 B

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V

Voltage: 220-240V 50/60Hz


Source: Tubo / Tube LED 4,5W |

Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V / DALI

Cavo / Wire RAL: 9005

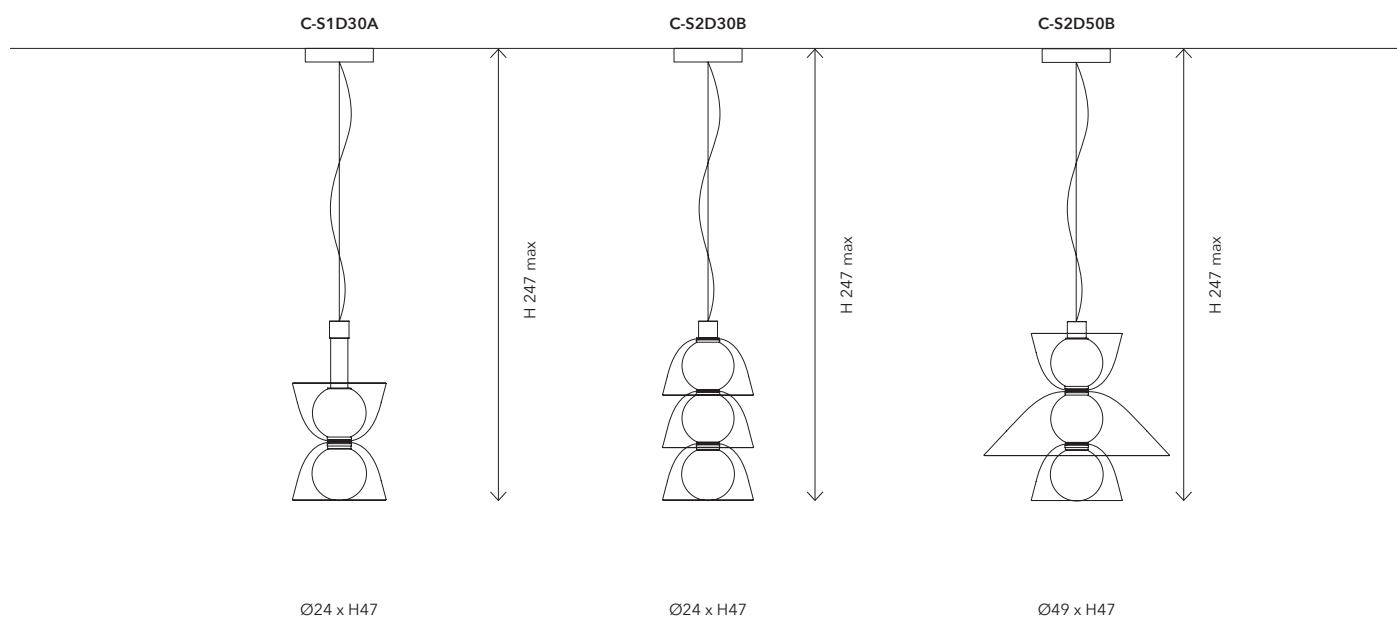

Finiture / Finishes

Struttura / Structure



Vetro bianco acidato
White etched glass

Sfere / Sphere



Vetro nero fumè
Black fumè glass



Vetro oro opaco
Matt gold glass




Vetro blu opaco
Matt blue glass



Vetro rosa opaco
Matt rose glass

Piatti / Plates



Vetro trasparente
Transparent glass



Vetro nero fumè
Black fumè glass



Vetro blu trasparente
Transparent blue glass



Vetro rosa trasparente
Transparent rose glass

NOTE:

Verificare quota H max nel disegno illustrativo

Check max H dimension in the illustrative drawing

Configurazioni / Configurations

	Neutro freddo Cold neutral	Neutro caldo Warm neutral	Colore freddo Cold color	Colore caldo Warm color
TALL 3 D60 A				
TALL 3 D30 A				
TALL 2 D60 A				

Configurazioni / Configurations

	Neutro freddo Cold neutral	Neutro caldo Warm neutral	Colore freddo Cold color	Colore caldo Warm color
SHORT 2 D50 B				
SHORT 2 D30 B				
SHORT 1 D30 A				
SHORT 1 D60 A				
SHORT 2 D30 A				
SHORT 2 D50 A				

CODES

CODICI / CODES MISURA / SIZE STRUTTURA / STRUCTURE DIFFUSORE / SHADE DETTAGLI / DETAILS

C-S1D60A-COLDN-D2NE	short 1 D60 A	vetro bianco acidato / white etched glass	vetro neutro freddo / cold neutral glass	dimnable 0-10V
C-S1D60A-COLDC-D2NE	short 1 D60 A	vetro bianco acidato / white etched glass	vetro colore freddo / cold color glass	dimnable 0-10V
C-S1D60A-WARMN-D2WE	short 1 D60 A	vetro bianco acidato / white etched glass	vetro neutro caldo / warm neutral glass	dimnable 0-10V
C-S1D60A-WARMC-D2WE	short 1 D60 A	vetro bianco acidato / white etched glass	vetro colore caldo / warm color glass	dimnable 0-10V
C-S1D60A-COLDN-D2WE	short 1 D60 A	vetro bianco acidato / white etched glass	vetro neutro freddo / cold neutral glass	dimnable 0-10V
C-S1D60A-COLDC-D2WE	short 1 D60 A	vetro bianco acidato / white etched glass	vetro colore freddo / cold color glass	dimnable 0-10V
C-S1D30A-WARMN-P2NE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro neutro caldo / warm neutral glass	dimnable DALI
C-S1D30A-WARMC-P2NE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro colore caldo / warm color glass	dimnable DALI
C-S1D30A-COLDN-P2NE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro neutro freddo / cold neutral glass	dimnable DALI
C-S1D30A-COLDC-P2NE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro colore freddo / cold color glass	dimnable DALI
C-S1D30A-WARMN-P2WE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro neutro caldo / warm neutral glass	dimnable DALI
C-S1D30A-WARMC-P2WE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro colore caldo / warm color glass	dimnable DALI
C-S1D30A-COLDN-P2WE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro neutro freddo / cold neutral glass	dimnable DALI
C-S1D30A-COLDC-P2WE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro colore freddo / cold color glass	dimnable DALI
C-S1D30A-WARMN-D2NE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro neutro caldo / warm neutral glass	dimnable 0-10V
C-S1D30A-WARMC-D2NE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro colore caldo / warm color glass	dimnable 0-10V
C-S1D30A-COLDN-D2NE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro neutro freddo / cold neutral glass	dimnable 0-10V
C-S1D30A-COLDC-D2NE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro colore freddo / cold color glass	dimnable 0-10V
C-S1D30A-WARMN-D2WE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro neutro caldo / warm neutral glass	dimnable 0-10V
C-S1D30A-WARMC-D2WE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro colore caldo / warm color glass	dimnable 0-10V
C-S1D30A-COLDN-D2WE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro neutro freddo / cold neutral glass	dimnable 0-10V
C-S1D30A-COLDC-D2WE	short 1 D30 A	vetro bianco acidato / white etched glass	vetro colore freddo / cold color glass	dimnable 0-10V