


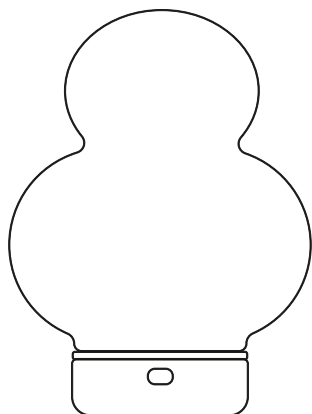

BIBENDUM

Design: Matteo Zorzenoni
Lampada da tavolo ricaricabile

ISTRUZIONI D'USO

DATI TECNICI

LED TOUCH DIMMER | 2.0 W | 244 - 263 - 273 lm | 2200
- 2700 - 3000K | IP40 | CRI>80 | 5Vdc max.2A



Questo prodotto contiene una sorgente luminosa in classe D.

Durata/ricarica

Durata di circa 10/11 H. h alla massima potenza.


Tempo di ricarica a 2A: 3/4 h

Accessori/Ricambi

Inclusi: base di ricarica a contatto;

Non inclusi: carica batterie 2A max.; base di ricarica a contatto multipla (max 6 pz); pacco batteria sostitutiva.


ISTRUZIONI DI MONTAGGIO



ISTRUZIONI D'USO

Accensione / Spegnimento / Dimmerazione

Rapidi tocchi per accendere, cambiare la luminosità e spegnere il dispositivo. La ripetizione degli step è ciclica;
Con una leggera pressione sul touch per 2 secondi, la lampada si spegne memorizzando lo step di dimmerazione corrente ripropo-
nendolo all'accensione successiva.

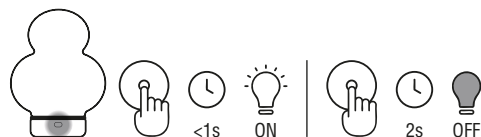


LED di segnalazione

1. LED rosso fisso: carica della batteria inferiore al 20% si consiglia la ricarica. Quando la carica è esaurita (1%), la lampada non si accende, ma emette tre flash bianchi di allerta - ricaricare;
2. LED rosso lampeggiante: ricarica in corso;
3. LED verde fisso: batteria carica al 100% si consiglia di disconnettere dall'unità di ricarica.

Attenzione: effettuare una carica completa della batteria prima del primo utilizzo.

Per un corretto caricamento della lampada si consiglia di:

- a. Collegare il cavo USB al caricatore;
- b. Collegare la spina alla presa elettrica;
- c. Appoggiare la lampada sulla base di ricarica;
- d. A carica completata scollegare la spina dalla presa elettrica e rimuovere il cavo USB.

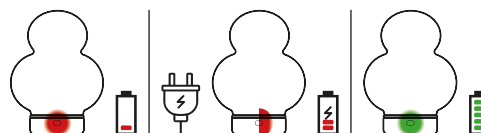

ACCESSORI INCLUSI

NM-WRL-BASE-7CM

INPUT: 5Vdc max 2A

OUTPUT: 5Vdc max 2A

Base di ricarica a contatto singola.



AVVERTENZE

Questo prodotto serve esclusivamente a scopi di illuminazione e:

- A) Non deve essere esposto a pesanti carichi meccanici o forti contaminazioni;
- B) Può essere installato e usato solo previo controllo delle condizioni del prodotto; verificare che non risulti sporco e non abbia subito danneggiamenti durante lo stoccaggio;
- C) L'installazione e la manutenzione vanno eseguite ad apparecchio spento;
- D) Modifiche o manomissioni del prodotto e il non rispetto delle indicazioni riportate possono rendere l'apparecchio pericoloso;
- E) I prodotti con protezione IP40 sono idonei solo per uso interno;
- F) Per la pulizia di tutte le superfici metalliche e plastiche utilizzare un panno morbido asciutto e detergente neutro per lo sporco più tenace;
- G) La ditta NasonMoretti declina ogni responsabilità per danni causati da un proprio prodotto montato in modo non conforme alle istruzioni;
- H) Si consiglia di pulire usando esclusivamente un panno morbido e asciutto.

L'uso di detergenti aggressivi o panni abrasivi, nonché urti accidentali e sfregamento, possono danneggiare la delicata lavorazione;

I) Si consiglia l'utilizzo del cavo in dotazione originale. Utilizzare un caricatore a 2A max. certificati;

J) La lampada funziona correttamente anche durante il processo di ricarica;

K) La batteria è fornita delle seguenti protezioni: cortocircuito, sovracorrente, sovratensione, sovraccarica, sovralimentazione, sovracorrente, sovratensione;

L) Per preservare l'integrità della batteria si consiglia di mantenere la carica tra il 20% minimo e 80% massimo; se la lampada non viene utilizzata per lunghi periodi, si consiglia di procedere periodicamente ad un ciclo di carica/scarica del prodotto;

M) Si prega di fare riferimento alle leggi locali per un corretto smaltimento e riciclaggio della batteria.

BATTERIE

Batterie sostituibili da personale qualificato

Rechargeable Li-ion Battery

Model: 18650-1S2P 3.7V 5200mAh

A) ATTENZIONE! Le batterie non ricaricabili non devono essere ricaricate;

B) ATTENZIONE! I terminali di alimentazione non devono essere cortocircuitati;

C) ATTENZIONE! Tipi differenti di batterie non possono essere usati assieme;

D) ATTENZIONE! Batterie nuove e batterie usate non possono essere usate assieme;

E) ATTENZIONE! tenere le batterie fuori dalla portata dei bambini. La batteria può essere sostituita solo dalla batteria fornita dal costruttore.

LEGENDA



CE
Dichiara che il prodotto soddisfa gli standard dell'UE per la salute, la sicurezza e la protezione ambientale.



CLASS III
Apparecchio basato su un'alimentazione a bassissima tensione di sicurezza, in cui non si producono tensioni superiori alla stessa.



DIMMABLE
Indica che è possibile regolare l'intensità luminosa della lampada.




IP Protection Degree
IP40: apparecchio protetto dalla penetrazione di corpi solidi di dimensioni maggiori a 1mm e non protetto dai liquidi.



Sorgente LED sostituibile da personale qualificato

NASONMORETTI Calle dietro gli Orti, 12
30141 Murano Venezia / Italy
T +39 041.739020
F +39 041.739878
info@nasonmoretti.com
www.nasonmoretti.com

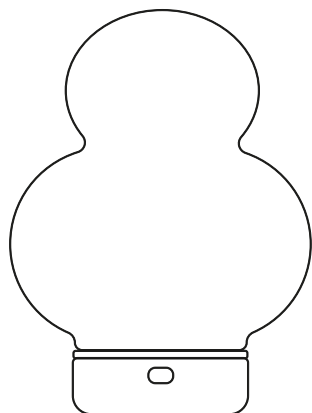

BIBENDUM

Design: Matteo Zorzenoni
Rechargeable table lamp

INSTRUCTIONS FOR USE

TECHNICAL DATA

LED TOUCH DIMMER | 2.0 W | 244 - 263 - 273 lm | 2200
- 2700 - 3000K | IP40 | CRI>80 | 5Vdc max.2A



This product contains a Class D light source.


Lifespan/Recharging

Battery lasts about 10/11 H. h at full power.
Charging time at 2A: 3/4 h.

Accessories/Spare parts

Included: contact charging base;
Not included: max. 2A battery charger; multi-contact charging
base (max. 6 pc); replacement battery pack.


ASSEMBLY INSTRUCTIONS



INSTRUCTIONS FOR USE

Switching On / Switching Off / Dimmer function

Tap the quick touch sensor a few times to change the brightness and switch off the device. The steps are repeated in a cycle.
When you gently press the touch button for 2 seconds, the lamp switches off, memorising the current dimmer setting and proposing it again the next time the lamp is switched on.

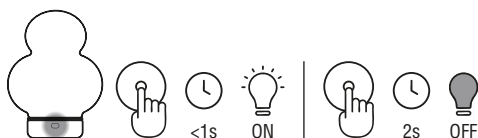


Indicator LEDs

1. Permanent red LED: the battery charge is lower than 20%, recharging is recommended. When the charge is low (1%), the lamp does not switch on, but emits three white warning flashes - recharge.
2. Flashing red LED: recharging in progress.
3. Permanent green LED: the battery is 100% charged, disconnection from the power charger is recommended.

Important: fully charge the battery before using it for the first time.

To charge the lamp correctly, it is advisable to:

- a. Connect the USB cable to a charger;
- b. Connect the plug to the electrical socket;
- c. Place the lamp on the charging base;
- d. When recharging is over, disconnect the plug from the mains socket and remove the USB cable.

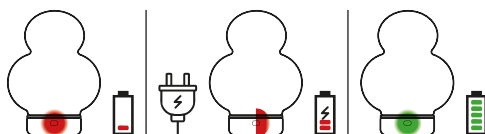

INCLUDED ACCESSORIES

NM-WRL-BASE-7CM

INPUT: 5Vdc max 2A

OUTPUT: 5Vdc max 2A

Single-contact charging station.



WARNINGS

This product is exclusively for lighting purposes and:

- A) It must not be exposed to heavy mechanical loads or severe contamination;
 - B) It can only be installed and used after checking the condition of the product; check that it is not dirty and has not been damaged during storage;
 - C) Installation and maintenance must be carried out when the appliance is switched off;
 - D) Any alteration or tampering with the product and any non-compliance with the instructions given may make the device unsafe;
 - E) Products with an IP40 rating are suitable for outdoor use;
 - F) To clean all metal and plastic surfaces, use a soft, dry cloth and a neutral detergent for more stubborn dirt;
 - G) The company NasonMoretti accepts no liability for damage caused by its own product not being assembled in accordance with the instructions;
 - H) We recommend cleaning using only a soft, dry cloth.
The use of aggressive cleaning agents or abrasive cloths, and any accidental knocks and rubbing may damage the delicate leaf finish.
 - I) We recommend using the original cable; use a certified max. 2A charger;
 - J) The lamp works correctly even during the charging process.
 - K) The battery is provided with the following protective features: short circuit, overcharge, overcurrent, overvoltage;
 - L) To preserve the integrity of the battery, we recommend keeping the charge between min. 20% and max. 80%.
- If the lamp is not used for long periods, it is advisable to regularly charge/discharge the product;
- M) Please refer to local legal regulations for the proper disposal and recycling of the battery.

BATTERIES

Batteries replaceable by qualified personnel

Rechargeable Li-ion Battery

Model: 18650-1S2P 3.7V 5200mAh

- A) WARNING! Non-rechargeable batteries must not be recharged;
 - B) WARNING! The power terminals must not be short-circuited;
 - C) WARNING! Different types of batteries must not be used together;
 - D) WARNING! New and used batteries must not be used together;
 - E) WARNING! Keep batteries out of reach of children.
- The battery may only be replaced with the one supplied by the manufacturer.

LEGENDA



CE
Declares that the product meets EU standards for health, safety, and environmental protection.



CLASS III
Apparatus based on a safety extra-low voltage supply, in which no voltages above the same are produced.



DIMMABLE
Indicates that the light intensity of the lamp can be adjusted.



IP Protection Degree
IP40: apparatus protected from penetration by solids larger than 1mm and not protected from liquids.



LED replaceable by qualified personnel

NASONMORETTI Calle dietro gli Orti, 12
30141 Murano Venezia / Italy
T +39 041.739020
F +39 041.739878
info@nasonmoretti.com
www.nasonmoretti.com