

# Branch Sconce

Sconces

## YOUR PRODUCT CODE

BRES-M-AA01-27-1\_TRIAC\_120V

### DESCRIPTION

Perforated metal shells sit comfortably atop diffuser lenses, in this family of lights. This fixture is available in a variety of warm anodized finishes and warm color temperatures, adding atmosphere to any space.

### MATERIALS

Perforated anodized aluminum, acrylic lens

### COLLECTION NOTES

This product is designed to be installed with a 2" x 4" single gang junction box. For 4" octagonal or round boxes, a Junction Box Cover Plate will be required and is sold separately.

### PRODUCT DIMENSIONS

Large 46 L x 3 W x 3 in D | Medium 24 L x 3 W x 3 in D | Small 13 L x 3 W x 3 in D

### PRODUCT WEIGHT

8 lbs / 3.6 kg

### PERFORMANCE

Delivered Lumens 200 lm (Small) | 435 lm (Medium) | 870 lm (Large)  
Power Consumption 9W (Small) | 18W (Medium) | 37W (Large)  
Luminous Efficacy 22.2 lm/W (Small) | 24.2 lm/W (Medium) | 23.5 lm/W (Large)  
90 CRI  
Full detail in [photometry summary](#).

### CERTIFICATION

Suitable for Damp Locations  
UL Listed  
UL Listed to Canadian safety standards.  
ADA Compliant  
IP44

### LED LIFESPAN

50k hours

## SPECIFICATION LOGIC

### SIZE

Small 13"	S
Medium 24"	M
Large 46"	L

### SHADE FINISH

Natural Anodize	AA01
Gold Anodize	AA03
Black Anodize	AA04

### COLOR TEMPERATURE


2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

### DIMMING / CONTROL / INPUT

1% Dimming, TRIAC / Forward Phase Control, 120V Input	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input"	0.1_10V_UNV

## DRAWINGS

BRES-L Branch Sconce Large Dimension

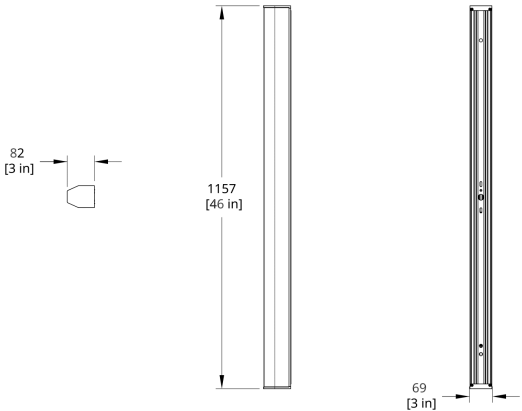

BRES-M Branch Sconce Medium Dimension

BRES-S Branch Sconce Small Dimension

