






Ø102mm

Image shown above 14.10 with round canopy

| | |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series | 14 |
| Mounting | Ceiling mounted |
| Glass Colours | Clear |
| Lamp | 1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm |
| Coaxial Length | 3000mm standard / up to 30500mm maximum Adjustable length |
| Canopy Finishes | 14.4 - 14.10: white, black or brushed nickel canopy 14.19m - 14.46m: white, black, brushed nickel, or brushed brass canopy |
| Materials | Cast glass, blown borosilicate glass, braided metal coaxial cable, electrical components, steel canopy |
| Power Supply | Integral Remote mounted for 14.19m - 14.46m Bocci recommends remote mounting power supplies for ease of long-term maintenance. |
| Environment | Indoor, dry location. IP30 |
| Note | Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research. |
| Registration | ® 14 Series product design protected as U.S. Reg. No. 7,129,209 |
| Certifications | <div></div> |

| Weight (kg) | |
|--------------------------------------------------------------------------------------|------|
|  | |
| Round | |
| 14.4 | 5.6 |
| 14.10 | 16.7 |
| 14.19m | 29.8 |
| 14.31m | 48.3 |
| 14.46m | 64.2 |

ADJUSTABLE LENGTH

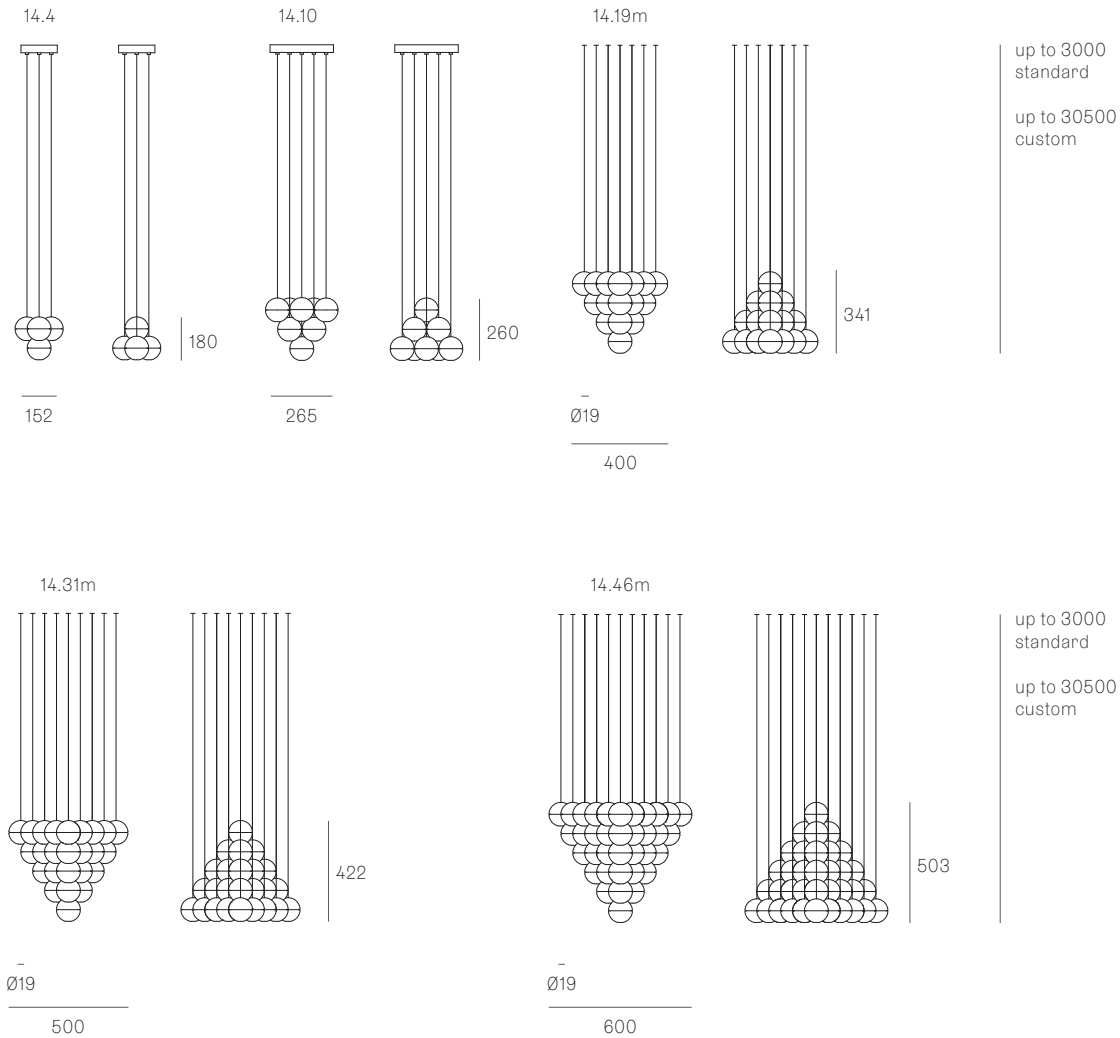

All dimensions are in millimeters (mm) unless otherwise specified.

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.