

Image shown above 87.11 with square canopy with pendant anchor kit


Series	87
Mounting	Ceiling mounted
Glass Colour	Clear
Lamp	1.5W LED, 2500K, 130lm 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 87.1 - 87.7 Non-adjustable Length: 87.11 - 87.36
Canopy Finishes	87.1 - 87.7: white, black or brushed nickel canopy 87.1mi/mo: white polyurethane canopy 87.11 - 87.36: white canopy
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 87.1m/mo/mi Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 03611144 - 0005-0009

Weight (kg)

○		□	
Round		Square	
87.1	1.4	87.11	25.5
87.3	4.1	87.26	50.5
87.5	6.8	87.36	68.6
87.7	9.5		
87.14	30.5		
87.26	48.2		
87.36	64.1		
		▭	
		Rectangle	
		87.11	25.5
		87.14	30.9
		87.20	40.9
		87.26	45.9
		87.36	64.5


Certifications

ADJUSTABLE LENGTH

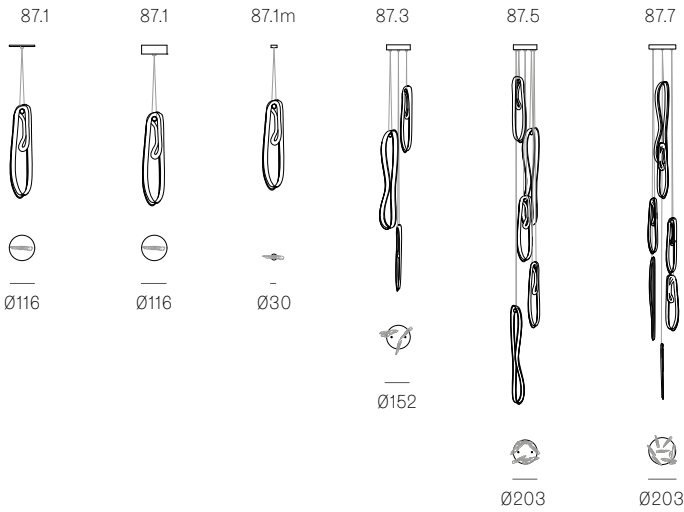

up to 3000
standard
up to 30500
custom

NON-ADJUSTABLE LENGTH

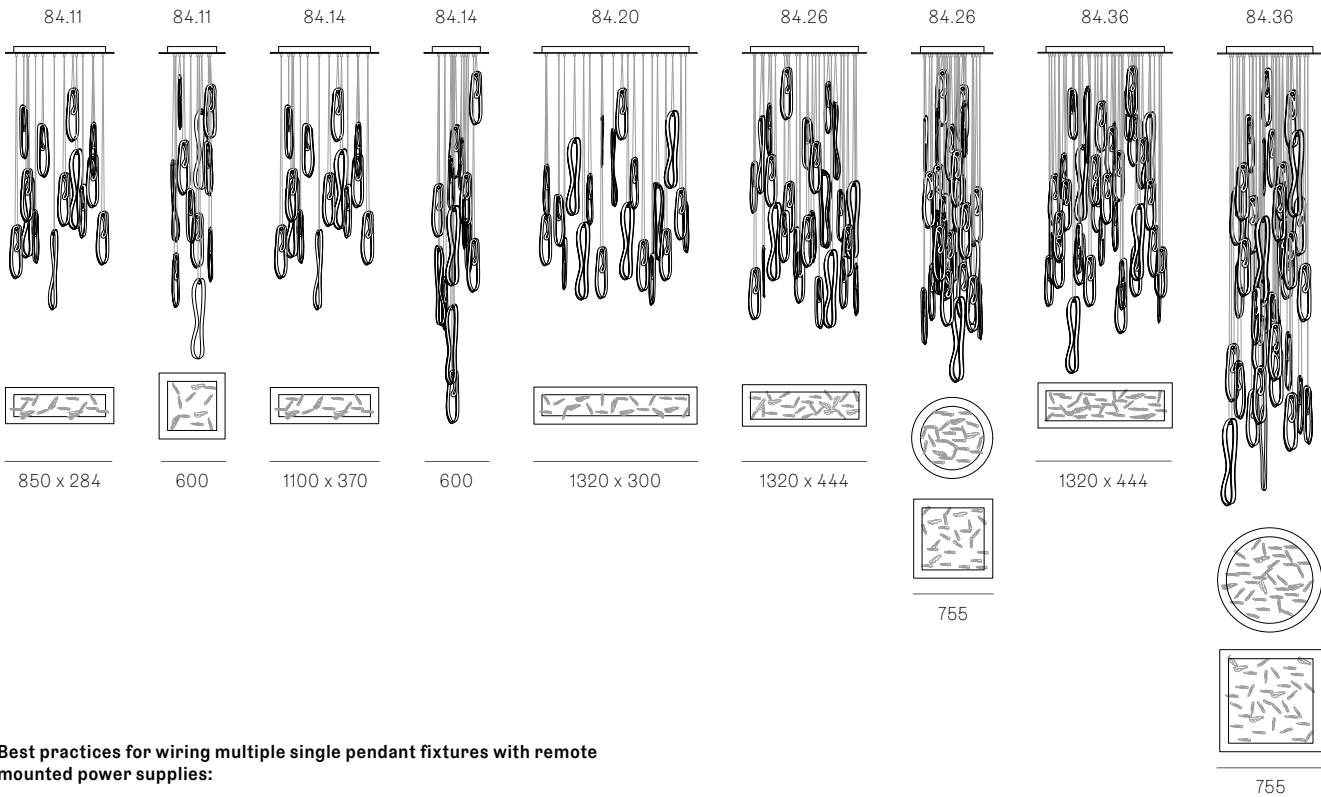


up to 3000
standard
up to 30500
custom

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:


- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.

ADJUSTABLE LENGTH

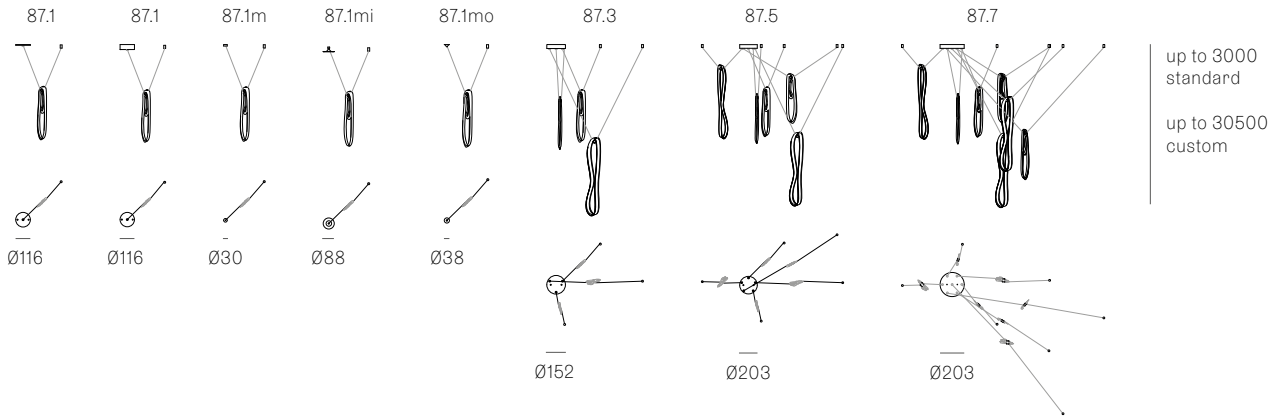

NON-ADJUSTABLE LENGTH



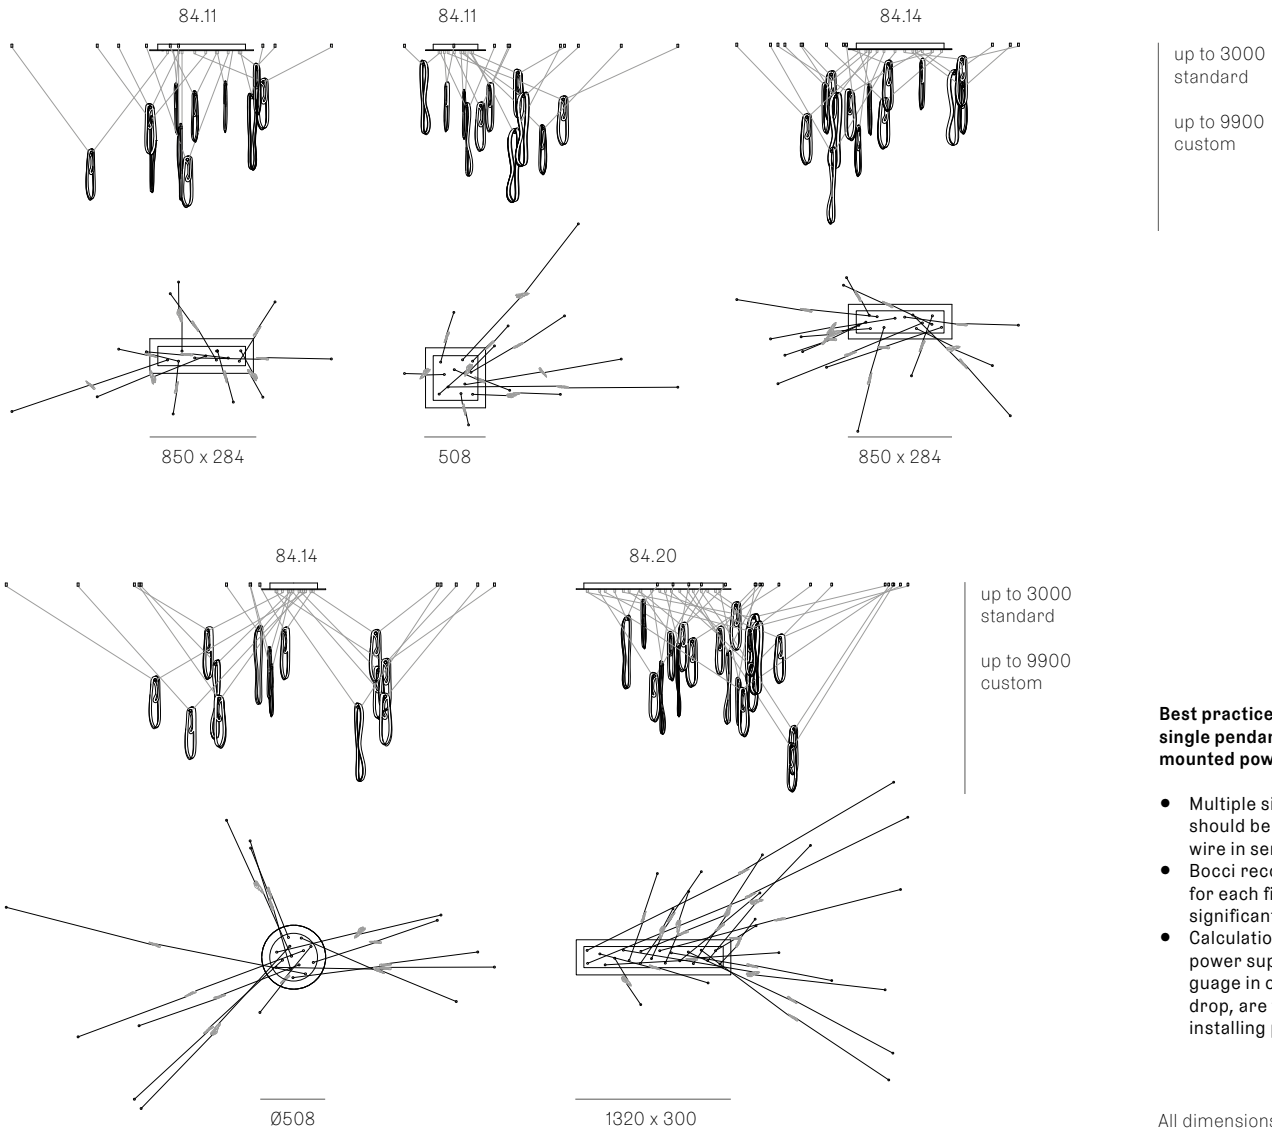


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:







- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.




NON-ADJUSTABLE LENGTH

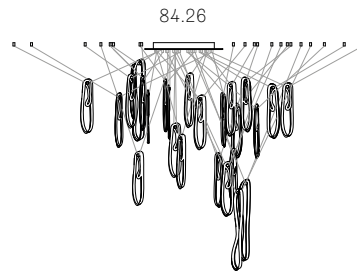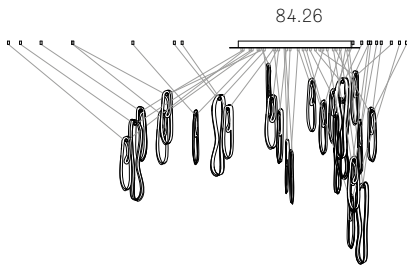

up to 3000
standard
up to 30500
custom

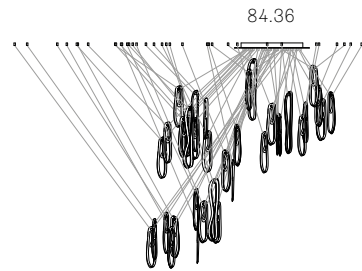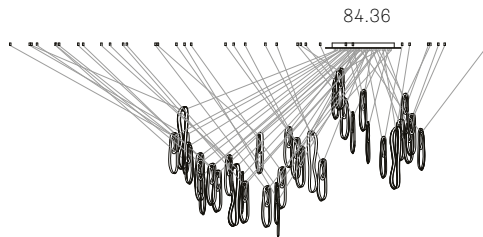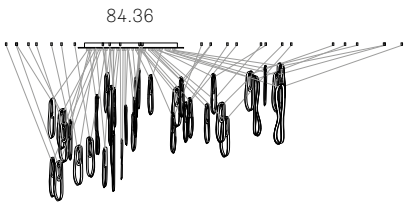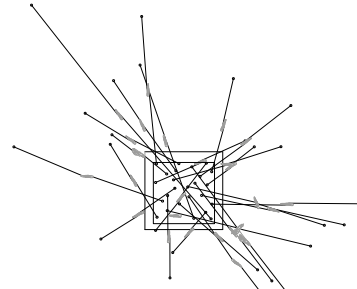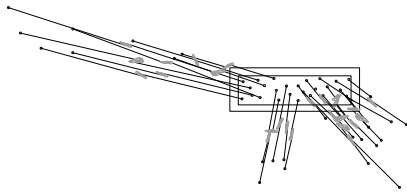

up to 3000
standard
up to 9900
custom

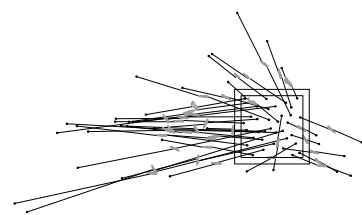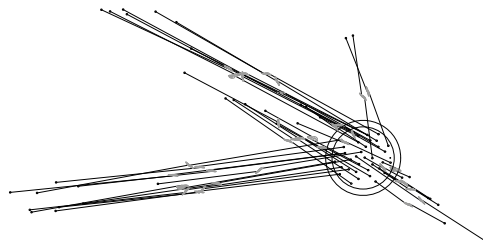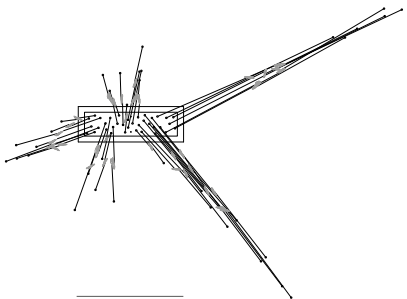

All dimensions are in millimeters (mm)
unless otherwise specified.