

Image shown above 28t

**Series** 28, 38V, 57, 73, 84, 84V, 100, 118

**Glass Colours** 28: Clear, colour pendants  
 38V: Clear  
 57: Grey, white, light mirror, dark mirror  
 73: Clear, grey 1, grey 2, grey 3  
 84/84Vt: White/copper  
 100: Frosted clear, frosted grey  
 118: White

**Lamp** 1.5W LED, 2500K, 130lm  
 84/84V, 1.5W LED, 3500K, 130lm

**Plug Types** Type A - 110V  
 Type C - 230V  
 Type G - 230V  
 Type I - 230V

**Base** Ø75mm

**Cable length** 2290mm black flexible cord

**Finish** Unlacquered brass base and dial control

**Materials** Glass, brass, electrical components

**Power Supply** Integral, dial control with build-in dimmer  
 Input 100-240V, 0.5A 50-60Hz  
 Output 12V  
 Ta 25°C

**Dimming** Built-in dimmer ONLY

**Environment** Indoor, dry location. IP30

**Note** The brass used in our Table Light is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment

Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.


**Patent #** 28: US D687,740  
 EU 001695834-001 to 004  
 38V: EU 002071019-001  
 57: US D796732  
 EU 002268581-0001 to 0006  
 73: US D762,323 S  
 EU 002633230-0001 - 0003  
 84: EU 003611144-0001 to 0004  
 100: US Patent pending  
 EU 008526131-0001  
 118: Worldwide patents pending

**Certifications**




**Weight (kg)**


28t	1	84t	2
38Vt	2.5	84Vt	2
57t	2	100t	4
73t	2.7	118t	3.6

**PLUG TYPES**


Type A



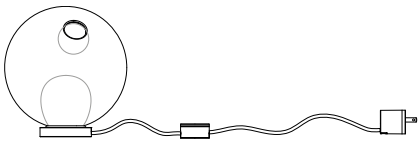
Type C



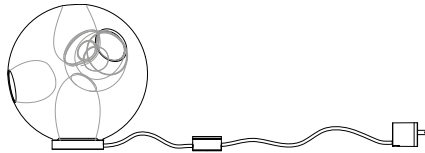
Type G




Type I

**TABLE LIGHT** $\pm \text{Ø}165$ 


28t

 $\text{Ø}190 - 215$ 


38Vt

 $100 - 150$ 


57t

 $\pm 230 - 380$ 

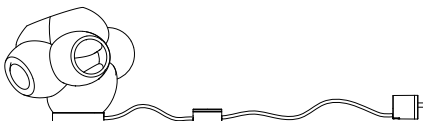
73t

 $\pm \text{Ø}100 - 120$ 

84t

 $\pm \text{Ø}135$ 

84Vt

 $\pm 190$ 

100t

 $\pm \text{Ø}140 - 160\text{mm}$ 

118t

All dimensions are in millimeters (mm)  
unless otherwise specified.