


# COLUMN 300 — C

A—N—D

CEILING

Designed by Lukas Peet

2024

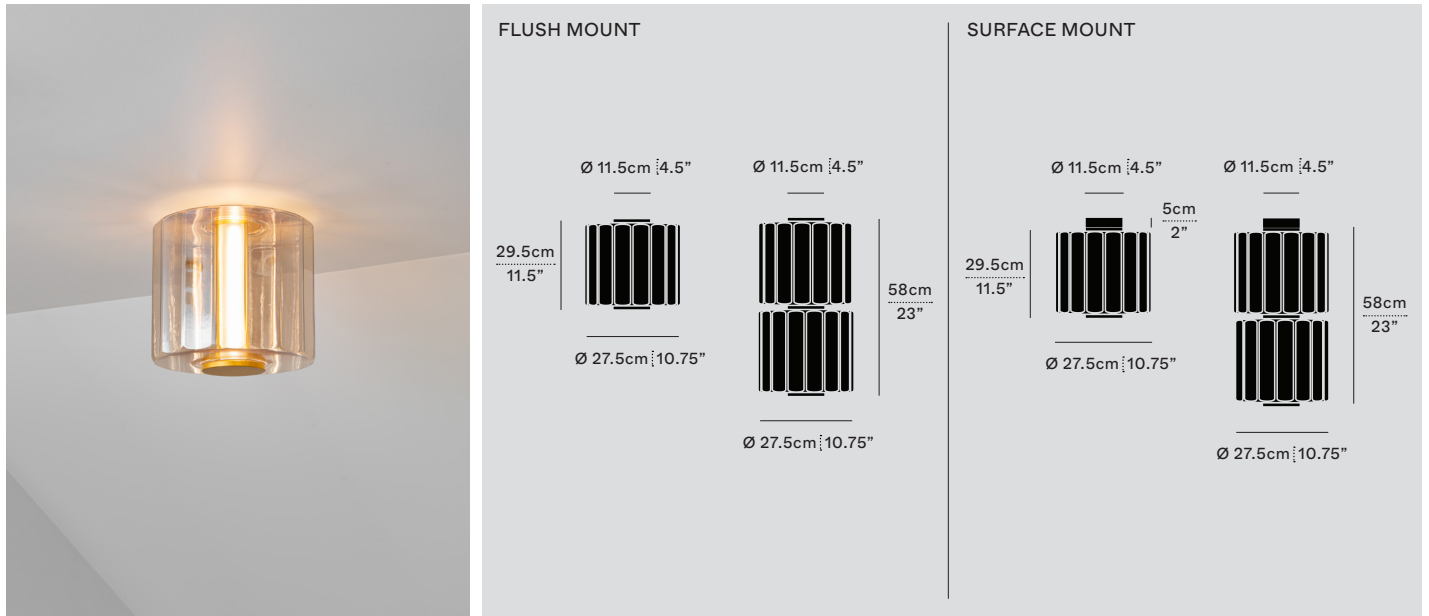

COL-300-1-C-AMB-27-ELV-120-REM

A-N-D.COM

## TYPE

Ceiling

## DIMENSIONS (PER 1 UNIT)

Ø 27.5cm x 29.5cm / Ø 10.75" x 11.5"

## Weight

5.3kg / 11.7lbs

## MOUNTING OPTIONS

Flush Mount (remote power supply)  
Surface Mount (power supply in canopy)

—See install instructions for more details

## 3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

## CERTIFICATIONS



Application: dry indoor location only

## TECHNICAL INFORMATION

### Input Voltage

110–120V, 220–240V, 110–277V

### Lamping

12W 24V DC LED (PER UNIT)

CRI 90+, 50,000 hours


### Lumens

711 lumens delivered (PER UNIT)

### Controls

Phase dimming, 0–10V,  
DALI (6" canopy or remote)

## COLOUR TEMPERATURE OPTIONS



## DIM TO WARM

Warm / DIM - Bright / DIM +



## MANUFACTURED

Canada

## MATERIALS

Glass, Aluminum

## FINISHES



Carbon (CBN) Ivory (IVO) Amber (AMB)

SERIES	SIZE	UNIT	TYPE	FINISH	CCT	PS	VOLTAGE IN	CANOPY
COL	300	<input type="checkbox"/> 1	C	<input type="checkbox"/> CBN (CARBON)	<input type="checkbox"/> 27 (2700K)	<input type="checkbox"/> ELV	<input type="checkbox"/> 120	<input type="checkbox"/> REM (REMOTE)
		<input type="checkbox"/> 2		<input type="checkbox"/> IVO (IVORY)	<input type="checkbox"/> 30 (3000K)	<input type="checkbox"/> 010	<input type="checkbox"/> 230	<input type="checkbox"/> SUR (SURFACE MOUNT)
				<input type="checkbox"/> AMB (AMBER)	<input type="checkbox"/> 35 (3500K)	<input type="checkbox"/> DAL	<input type="checkbox"/> 277*	
				<input type="checkbox"/> DW (DIM TO WARM)				

\*277 only available with 010