


PIPELINE V2 125.2 — P

A—N—D

PENDANT

Designed by Caine Heintzman

2013

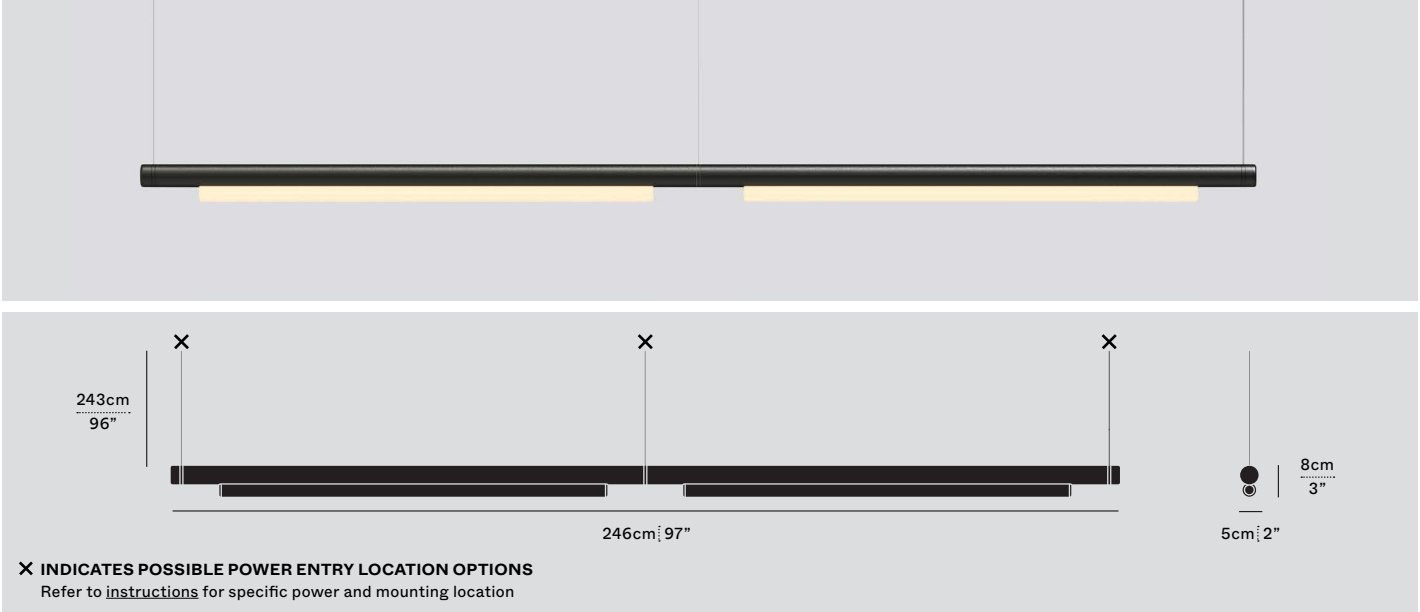

PIP-V2-125.2-P-BK-27-ELV-120

A-N-D.COM

TYPE

Pendant

DIMENSIONS

246cm x 8cm x 5cm / 97"x 3" x 2"

Adjustable drop length

243cm / 96" —Custom length available

MATERIALS

Aluminum, Acrylic

MANUFACTURED

Canada

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 44W 24V DC LED

CRI 90+, 50,000 hours


Lumens

3546 lumens delivered

Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



CANOPY OPTIONS

Standard

Ø 15cm x 5cm / Ø 6" x 2" enclosure (1), monopoint suspension, surface mount driver (1), anchor (2) and cable swag add-on included (1)

*Refer to Accessories for Micro Canopy, Remote Power Supply, and other options

FINISHES



SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP-V2	125.2	P	☐ BK (BLACK) ☐ WH (WHITE) ☐ RA (RAW) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ BK (BLACK) ☐ WH (WHITE) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ 41 (4100K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL	☐ 120 ☐ 230 ☐ 277*

*277 only available with 010