

# FUSE SWITCHED 0996

SKU 1215001

astro



## PRODUCT SPECIFICATION

### GENERAL

<b>FINISH:</b>	Polished Chrome	<b>CABLE LENGTH:</b>	Not Applicable
<b>MAIN MATERIAL:</b>	Metal - Aluminium	<b>GROSS WEIGHT:</b>	1.85 (kg)
<b>DIMENSIONS:</b>	H: 180mm W: 75mm D: 62mm	<b>CLASS:</b>	CE (Class II)
<b>INSTALLATION ORIENTATION:</b>	Wall Mount	<b>IP RATING:</b>	IP20
<b>CUT OUT HOLE:</b>	Not Applicable	<b>BATHROOM ZONE:</b>	Zone 3
<b>RECESS DEPTH:</b>	62mm	<b>VOLTAGE:</b>	Mains 230V
<b>FIRE RATING:</b>	Not Applicable	<b>PRODUCT F MARK:</b>	Suitable for mounting on flammable materials

### LAMP


<b>LIGHT SOURCE:</b>	High Power LED	<b>MACADAM ELIPSE:</b>	6-Step
<b>MAXIMUM WATTAGE:</b>	3W	<b>UGR:</b>	Not Applicable
<b>MAXIMUM LAMP LENGTH:</b>	Not Applicable	<b>BEAM ANGLE:</b>	16 (Degrees)
<b>LAMP INCLUDED?</b>	Yes (Integral)	<b>TILT ADJUSTMENT ANGLE:</b>	90 (Degrees)
<b>LUMINOUS FLUX:</b>	80.88 (lm)	<b>ROTATION ADJUSTMENT ANGLE:</b>	330 (Degrees)
<b>COLOUR TEMP:</b>	3000 (K)	<b>AVERAGE LIFESPAN:</b>	54,000 (Hrs)
<b>CRI:</b>	80	<b>L70:</b>	To Be Advised
<b>R9:</b>	10.8		

### ELECTRICAL

<b>SWITCHED:</b>	Yes	<b>SUPPLY FREQUENCY:</b>	50/60 (Hz)
<b>DIMMABLE:</b>	No	<b>DRIVER/BALLAST VOLTAGE:</b>	220-240 (V)
<b>DIMMING METHOD:</b>	Not Applicable	<b>DRIVER AVERAGE LIFESPAN:</b>	60,000 (Hrs)
<b>DRIVER OUTPUT CURRENT:</b>	700 (mA)	<b>EFFICACY:</b>	24.95 (lm/W)
<b>DRIVER OUTPUT VOLTAGE:</b>	Not Applicable	<b>DRIVER/BALLAST INCLUDED?</b>	Yes (Integral)

## ADDITIONAL INFORMATION

CE




BOX QUANTITY X8


# PRODUCT ELEVATIONS

---


TOP



FRONT

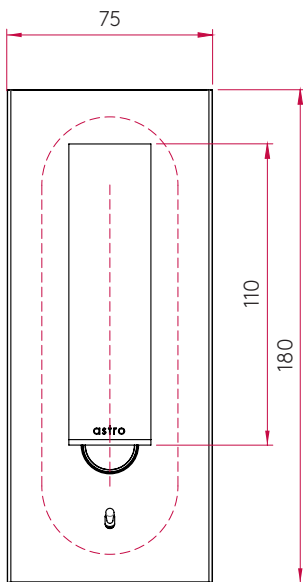

SIDE

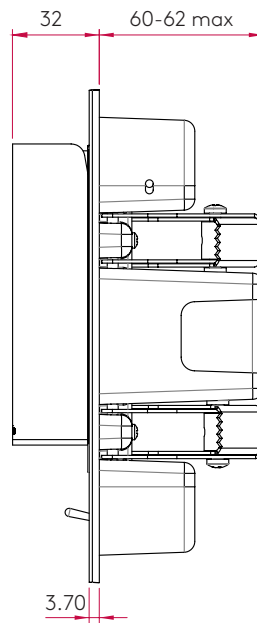

BACK

