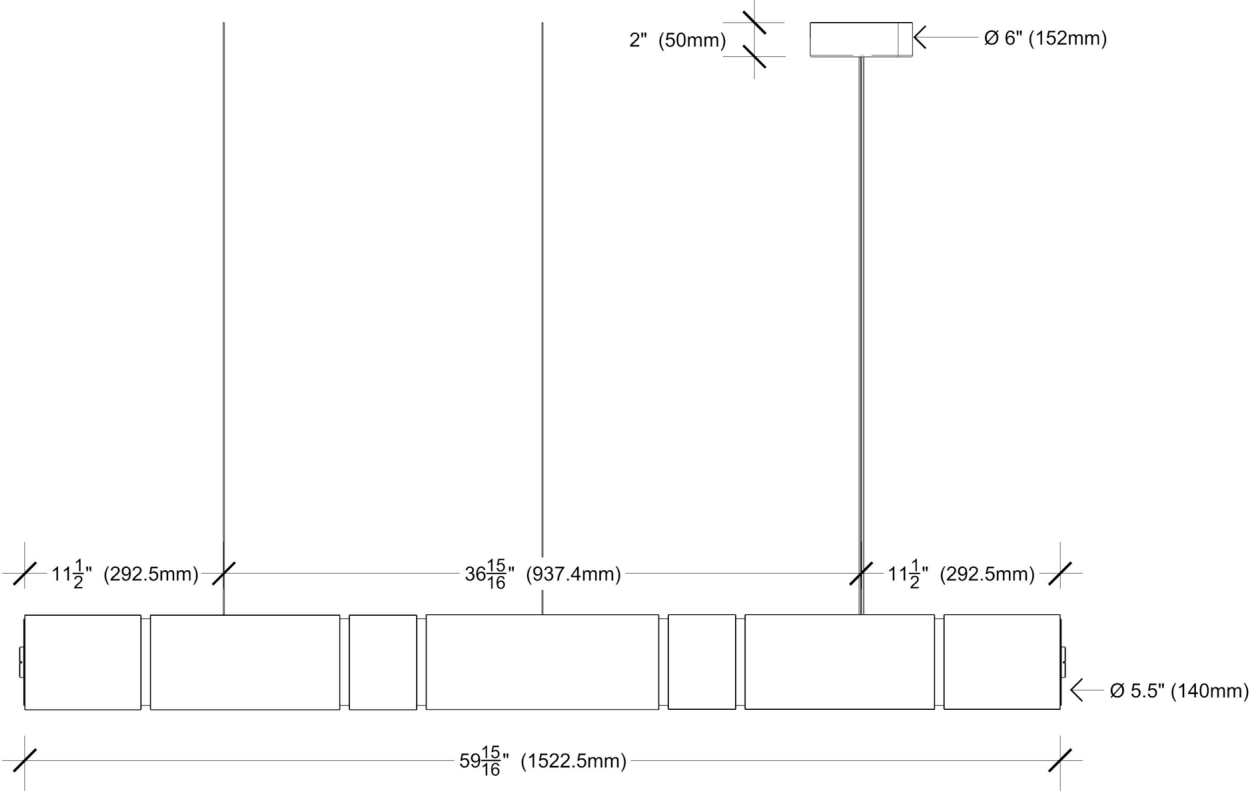




5
SA-A-PEN-5-60H
















PERFORMANCE PROFILE

Power cable out:	Top or Side	Input voltage:	120VAC
LED color temprature:	2200, 2700, 3000, 3500	Lumens delivered:	2100
Canopy color:	White or Black	Watts:	22 W
Driver location:	In canopy	Weight:	17 lbs
Dimming control:	ELV	Sabins:	2.16

(continues on page 2)

COLOR MOOD (Select one Color Mood)

Textile						Aluminium	Cable
							
Champagner	Salbei	Silber	Weiß	Sand Dollar	Oat	Champagne	Tan
							
Weinrot	Augergine	Terracotta	Maigrün	Maroon	Honeydew	Black	Chestnut
							
Indigo	Traube	Stahl	Petrol	Lagune	Ozean	Clear	Black

COLOR PATTERN (Select one)

		
Block	Semi-block	Mixed

NOTES

Application: Dry Certification: ETL (UL equiv) Lead Time: 6-10 weeks

Maintenance: Lint roll occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface.

Turn waste into wonders

stackabl.shop | @stack_abl | service@stackabl.shop