



± 150mm

Image shown above 76.11 with rectangular canopy

Series 76

**Mounting** Ceiling mounted

Glass Colour Clear

**Lamp** 0.4W LED, 2700K, 70Im

Coaxial Length 3000mm standard / up to 30500mm maximum

Adjustable length: 76.1 - 76.7

Non-adjustable Length: 76.11 - 76.36

Canopy Finishes 76.1 - 76.7: white, black or brushed nickel canopy

76.1mi/mo: white polyurethane canopy

76.11 - 76.36: white canopy

Materials Blown glass, copper mesh, braided metal coaxial cable,

electrical components, steel canopy

Power Supply Integral

Remote mounted for 76.1m/mo/mi

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

**Environment** Indoor, dry location. IP30

Note Every single Bocci product is handmade. Each one is variously

blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are

individual, irregular expressions of our research.

Patent # US D817,524 S

EU 002840975-0004-0007

Certifications



## Weight (kg)



#### Round

/6.1	0.7
76.3	2
76.5	3.4
76.7	7.2
76.14	20.9
76.26	30.4
76.36	39.5



#### Square

76.11	18.9
76.26	32.7
76.36	44.1




#### Rectangle


76.11	18
76.14	20
76.20	27.3
76.26	28.2
76.36	40



## **ADJUSTABLE LENGTH**

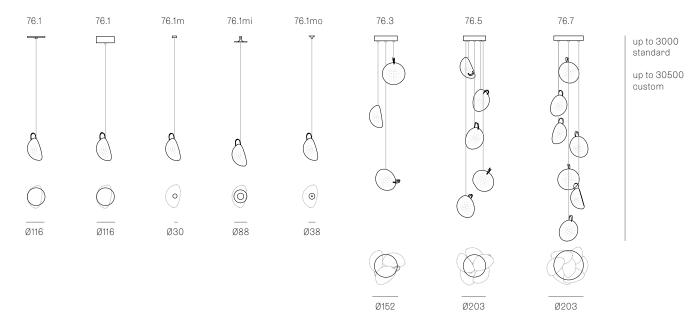

### **NON-ADJUSTABLE LENGTH**

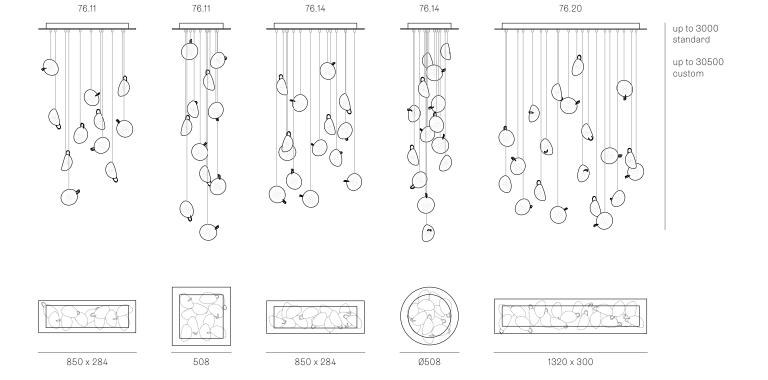


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.



# NON-ADJUSTABLE LENGTH

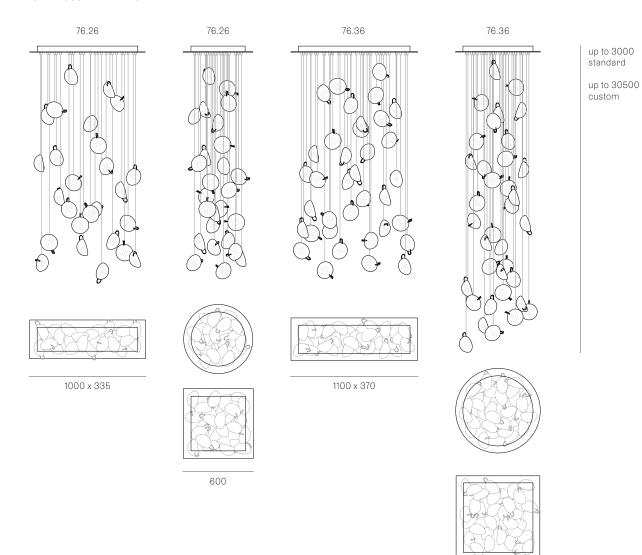

All dimensions are in millimeters (mm) unless otherwise specified.