LINK CLAMP

DESCRIPTION

Link modernizes the classic pantograph task lamp, incorporating the most advanced LED lighting technology to date. Designed with a dual-purpose shade/handle, Link seamlessly balances performance and style to satisfy focused lighting needs in any environment. The wide range of Link models include medium and small table, floor, clamp, and wall mount options to accommodate all residential, office, and hospitality task lighting applications.

FIXTURE TYPE

Table

LIGHT SOURCE

(99x) High-output LED array

PRODUCT CODES

Link Medium Clamp (Silver):	LINK MED CLP SLV
Link Medium Clamp (White):	LINK MED CLP WHT
Link Medium Clamp (Black):	LINK MED CLP BLK
Link Medium Clamp (Orange):	LINK MED CLP ORG
Link Medium Clamp (Green):	LINK MED CLP GRN
Link Small Clamp (Silver):	LINK SML CLP SLV
Link Small Clamp (White):	LINK SML CLP WHT
Link Small Clamp (Black):	LINK SML CLP BLK
Link Small Clamp (Orange):	LINK SML CLP ORG
Link Small Clamp (Green):	LINK SML CLP GRN
Link USB (White)	LINK USB
Link Small Surface Mount:	Special order only
Link Medium Surface Mount:	Special order only

LIGHT CONTROL

Rocker switch (high, low, off)

FEATURES

360° rotation at base Full-range height adjustability 180° front to back head tilt Advanced LED array eliminates multiple shadows Hi-low dim control Ships flat-packed

OCC model available upon request

SPECIFICATIONS

Voltage: 120-240V 50-60Hz Power Consumption: 7.5W Color Temperature: 3000K Luminosity: 350 Lumens

Luminaire efficacy: 47 Lumens/Watt Color Rendition Index: 90 CRI

50K hour lifespan Cable length: 8' (244cm)

Global multi-plug adapter available

1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS

3.4LBS	33.5" X 7" X 4.5"	
1.5KGS	85cm X 18cm X 11cm	
3.6LBS	33" X 6.5" X 4.5"	
1.6KGS	84cm X 17cm X 11cm	
	1.5KGS 3.6LBS	

NOTES

Occupancy sensor model available upon request Custom requests can be considered on volume orders Link USB sold separately


Pablo



FINISHES




DIMENSIONS

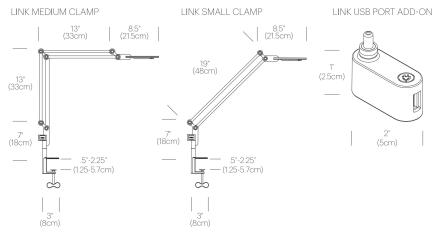



LINK SMALL SURFACE MOUNT



SURFACE MOUNT AVAILABLE FOR .2-1.2" (.5-3cm) AND 1.2-3" (3-7.6cm) WORKSURFACES