





DRY LOCATION



WET LOCATION

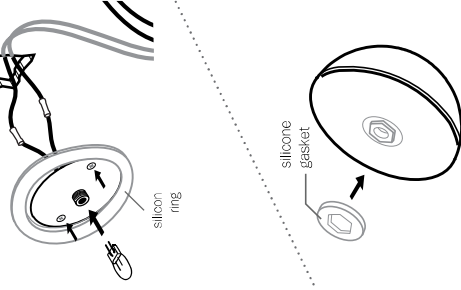

1

Mount power supply remotely and route output wiring from power supply to surface mounted light location.

Xenon (110V) or LED: connect the black wire to live wire and white wire to neutral wire.

Xenon (230V): connect black wire to brown wire and white wire to blue wire.

Note: Standard junction boxes are not compatible with the S4s. The surface mounted light cover plate mounts directly to the wall. Power supplies must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

2

Drill a maximum 19mm (0.75") diameter hole.

Join power supply wiring to back plate wiring using #16 butt splices, provided (stagger the splices).

Tuck wiring into wall opening and affix the back plate with fasteners provided.

Stagger the provided connectors so that they can be passed through the hole.

**Turn power to fixture on.**

3

For dry location:

Insert provided lamp into socket. Check that each lamp is working properly as you go along by keeping the power on.

Note: when using a dimmer use only low voltage electronic dimmer.

4

For wet location:

Insert provided lamp into socket. Check that each lamp is working properly as you go along by keeping the power on.

Install the silicone ring by slightly stretching it to fit around the back plate.

Note: when using a dimmer use only low voltage electronic dimmer.

5

Gently thread cast glass hemisphere onto cover plate. Do not tighten past the point of contact.

6

Clean fingerprints from surfaces.

For additional assistance, please contact Bocci:

**Vancouver**  
sales@bocci.com  
www.bocci.com

**Berlin**  
europe@bocci.com  
www.bocci.com

US Patent # D556,361  
EU Patent # 000518394-0001  
Made in Vancouver, Canada



**BOCCI**

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

SURFACE LIGHT

**14s** PRODUCT INSTALLATION INSTRUCTIONS