

- PENDANTS: one
- MOUNTING: mini canopy 30mm (1.2') in diameter x 11mm (0.4') deep
- LAMPING: grey and dark mirrored: 1.5w LED
white opaline and light mirrored: 1.5w LED / 0.18w LED
- COAX: adjustable. 3000mm (10') standard / up to 30500mm (100') maximum
- MATERIALS: blown and dipped glass, cast borosilicate glass cap, braided metal coaxial cable, electrical components, white canopy
- WEIGHT: approximately 1.5kg (3.4lb)
- POWER SUPPLIES: remote mounted (fixture does not hook directly to a junction box). Drivers included.

DESCRIPTION

The 'm' designation in this 57 variant refers to the mini canopy size. The mini canopy is just over 30mm (1.2') in diameter and 11mm (0.4') deep, which creates a subtle profile that will essentially disappear into the application surface. The pendant drop lengths on this light fixture are adjustable up to the specified maximum.

57 is an exploration of a technique used for producing closed cell foam. The process involves trapping voids of air of different sizes and configurations within a glass matrix, yielding a shape loosely referencing a rain cloud. These pockets of air remain invisible when the piece is off, but come alive to reveal an interior universe when the piece is illuminated. By virtue of the fabrication process, each piece is completely unique.

NOTES

- + Purchase replacement lamps online at www.bocci.com/shop/bulbs
- + Unless otherwise specified, a single class 2 driver will be sent for every 12 LED fixtures
- + Requires drivers to be remote mounted


US Patent # D796732
EU Design Patent # 002268581-0001 to 0006

Made in Vancouver, Canada

Vancouver
sales@bocci.com
www.bocci.com

Berlin
europa@bocci.com
www.bocci.com

approx 1.5kg (3.4lb)




MINI CANOPY

57.1m

Design by Omer Arbel
PRODUCT SPECIFICATION

© 2020, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com


BOCCI

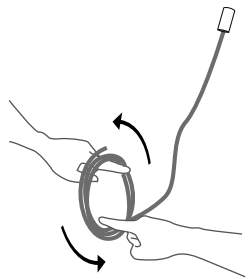

1

Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable.


Use patience: allow the cable to uncoil completely to avoid kinks.

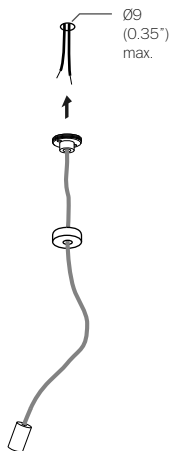

2

Drill a maximum 9mm (0.35") diameter hole in ceiling material. Pull low voltage house wire through the hole.

Note: There MUST be adequate backing, not just the drywall. This low voltage wire will run to a remote mounted power supply.

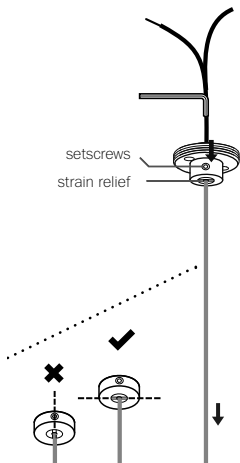

3


Thread the coaxial cable through the canopy, use a 2mm Allen key to loosen the setscrew in the canopy and gently feed the cable through until you have reached your desired drop length.

Use Allen key to tighten the setscrew to hold the strain relief and secure the coaxial cable at its new length. Perform a gentle tug test to ensure it is secure.

DO NOT OVERTIGHTEN.

Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to set screw chamber. There can be no contact between the set screw and the cable.

RISK OF ELECTRIC SHORT!

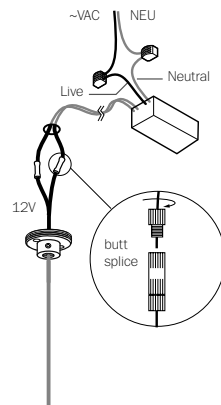

4


Primary: connect live and neutral power supply leads to supply wiring. Line with Live wire and Neutral with Neutral.

Secondary: Connect (+/-) wires to the coaxial cable using #16 butt splices, provided (stagger the splices).

For multiple pendant installations, ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.

Wires are 1.02mm (18AWG).

Note: Insulated core is positive and braided exterior is negative.

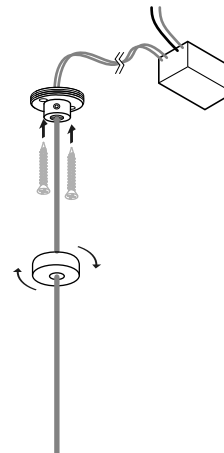

5

The client is responsible to ensure fasteners are attached to a robust structural substrate.

Affix mini-canopy to ceiling surface with fasteners provided. Twist the threaded cover into place.

Turn power to fixture on.

GREY / DARK MIRRORRED




6

For grey and dark mirrored, attach lamp to the coax holder socket.

Ensure power to lamp is working correctly.

WHITE OPALINE / LIGHT MIRRORRED



7

For white opaline and light mirrored, slide the coax holder onto the coaxial cable.

Plug in lamps, with the circular LED array lamp facing towards the coax holder.

Ensure power to lamp is working correctly.


MINI CANOPY

57.1m

Design by Omer Arbel
PRODUCT INSTALLATION INSTRUCTIONS


© 2020, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

BOCCI

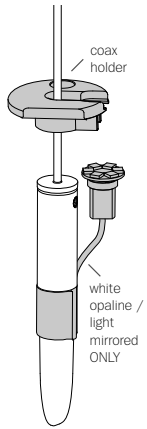

8


Slide the coax holder onto the coaxial cable.

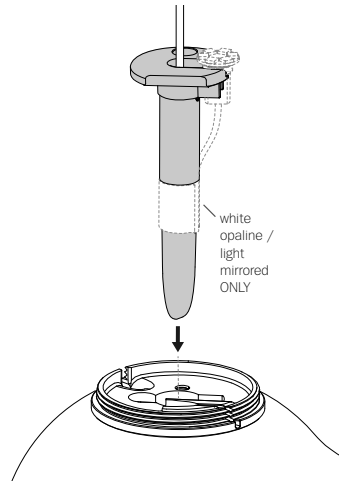

9

For white opaline/light mirrored, rest the circular LED array lamp on the coax holder.


Insert the lamp assembly into the glass pendant.

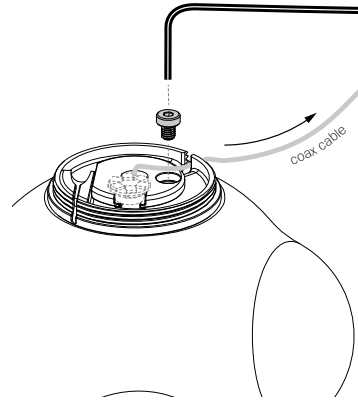

10


Attach the coax holder to the pendant holder and secure with set screw.

Slide the coax cable through the slot on the pendant holder

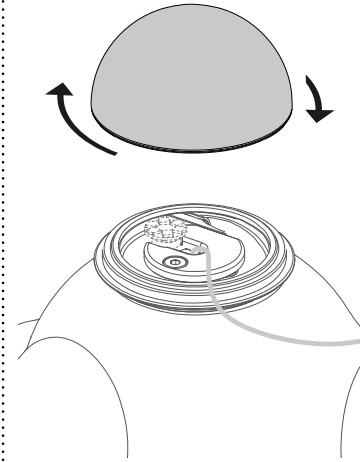

11

Thread glass cap onto the pendant, ensuring that the coax remains seated in the slot.

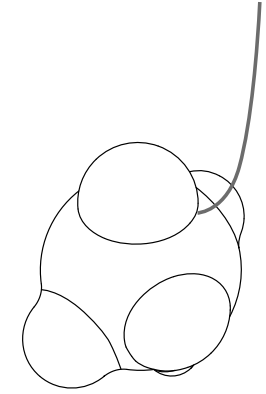

12

Clean fingerprints from surfaces.

For additional assistance, please contact Bocci:

Vancouver
sales@bocci.com
www.bocci.com

Berlin
europe@bocci.com
www.bocci.com

US Patent # D796732
EU Design Patent # 002268581-0001 to 0006

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE
E476186

MINI CANOPY

57.1m

Design by Omer Arbel
PRODUCT INSTALLATION INSTRUCTIONS

© 2020, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

BOCCI