

BROKIS®

CM16195

PRISMA

PENDENT SINGLE S 350, 700 - PC1311, PC1312
PENDENT SINGLE L 500 - PC1313



COMPONENTS INCLUDED WITH UNIT:

- 1× light
- 1× ceiling canopy
- 1× glass shade
- 1× hex key size 2.5
- 2× set screw M5×16
- 1× spirit level
- 2× installation hook
- 1× pair cotton gloves
- 1× installation manual

WARNING:

Installation must be carried out by a qualified electrician only.

Switch off power at main circuit panel prior to installation!

The manufacturer assumes no liability for damage occurring in transport or resulting from incorrect installation.

Installation time: 30 minutes / 2 persons



BROKIS®

BROKIS S.R.O.
ŠPANIĚLOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



CLEANING THE GLASS

BROKIS upholds only the highest possible quality standards. Prior to shipping, the light undergoes several quality controls and stages of cleaning. Because transportation, storage, and the amount of time that passes between packing at our plant and subsequent unpacking by the client can affect the light in different ways, we strongly recommend cleaning it prior to assembly.

The glass must first be rinsed in warm water, and a dish detergent may be used to remove all foreign particles, dust, and grease. Repeat the process if necessary and then dry the glass thoroughly with a paper towel.


Recommendation: Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Do not use any cleaning agents containing silicone, as they may leave a film and attract dust and smudges.

PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS CHECKED THOROUGHLY. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.




1. INSTALLING THE CEILING BRACKET

Using anchors of sufficient strength (not included), secure the bracket to the ceiling. With regard to various types of ceilings, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation, the use of improper anchors, or defects in the material to which the load-bearing component is secured.

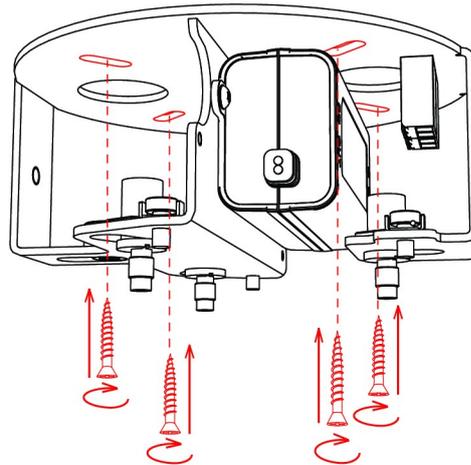



2. HANGING THE CEILING CANOPY

Hang the installation hooks from the canopy bracket and then hang the canopy from the hooks.

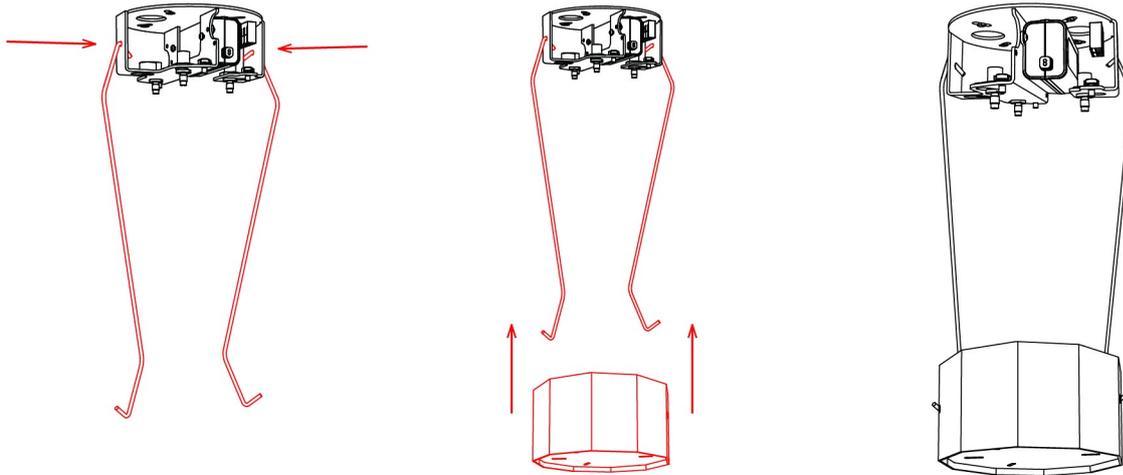


3. INSTALLING THE LIGHT 1/2

Pass the wire rope through the ceiling canopy and insert it in the stop in the ceiling bracket. Begin by passing the wire rope through the first part of the cylinder, the so-called safety. Loosen the cylinder on the stop and pass the unfrayed wire rope through it to the correct length. Then pass the wire rope through the second part of the stop. Retighten the cylinder and repeat these steps for the other two wire ropes.

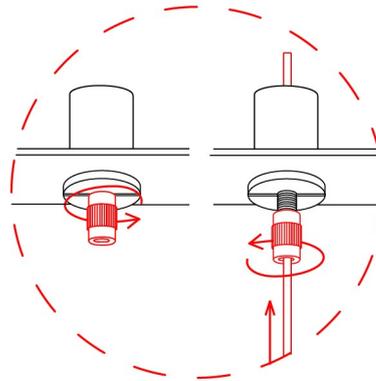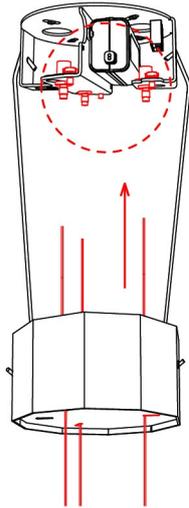


4. INSTALLING THE LIGHT 2/2

Pass the power cable through the ceiling canopy and insert it in the plastic cable stop in the ceiling bracket. Adjust the length as required and tighten the set screw in the cable stop.

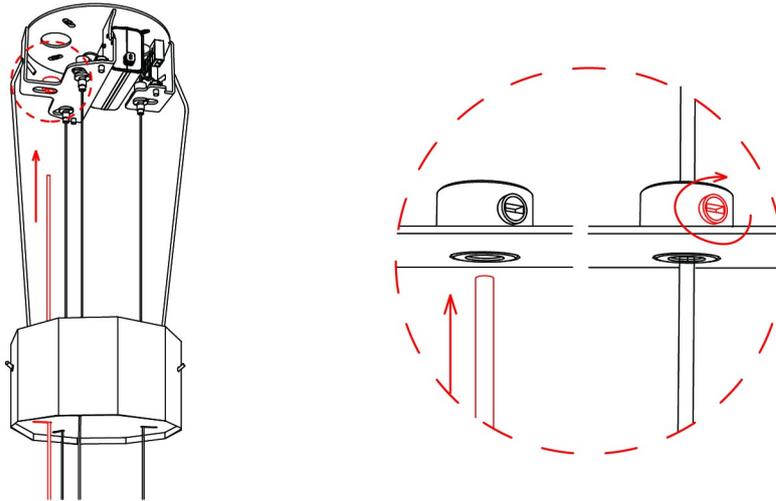

5. CONNECTING THE LIGHT TO THE BUILDING WIRING


Connect the light to the building wiring according to the diagram.

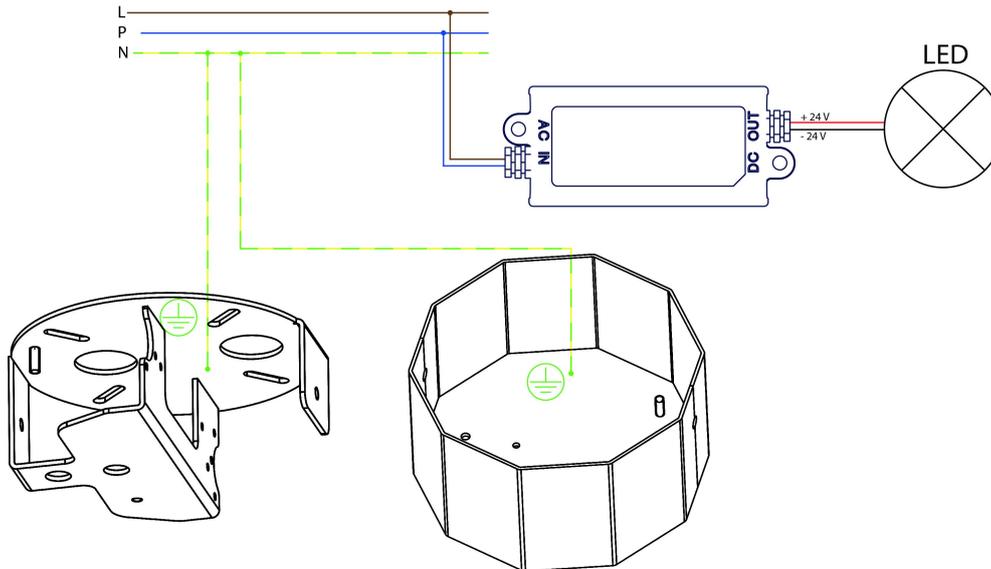

6. LEVELLING THE LIGHT AND SECURING THE WIRE ROPE STOPS


Place the provided spirit level on top of the metal fixture to check the alignment of the light. Loosen the wire rope stop by unscrewing the cylinder and then level the light with minor adjustments to the length of the wire rope. In order to pull the wire rope downwards, compress the cylinder and hold it. Once the light is level, retighten the cylinder. If the light requires further leveling, repeat these steps for the other two wire ropes.

Next, trim the wire ropes to at least 70 mm beyond the stops and secure them under the locking screws. This step ensures the wire ropes are locked in place and able to safely bear the full weight of the light.

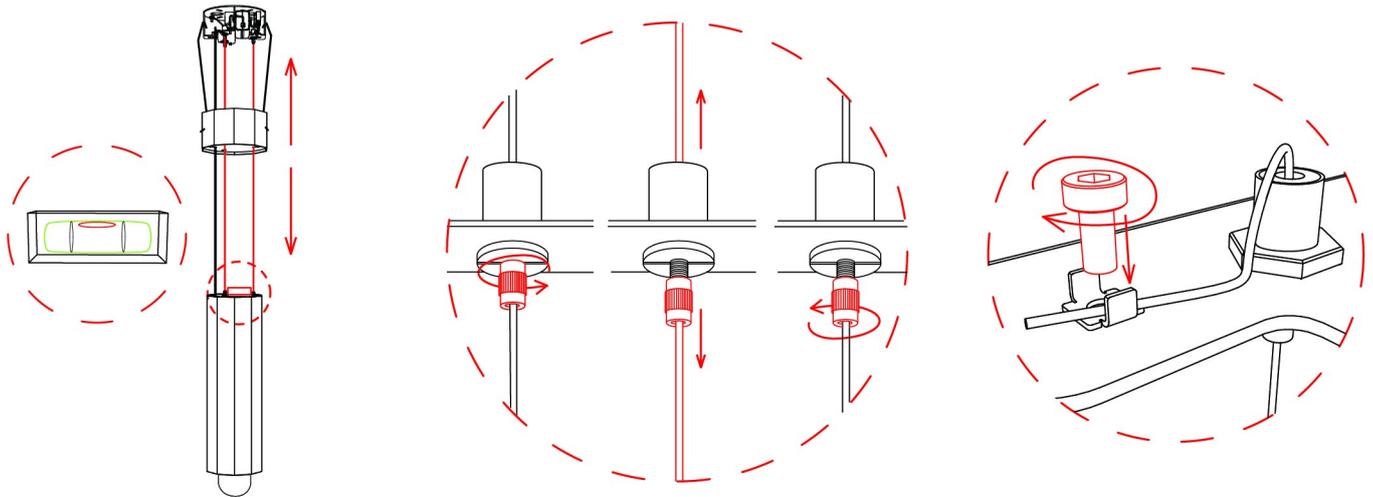


7. INSTALLING THE CEILING CANOPY

Remove the installation hooks from the ceiling bracket and canopy. Attach the canopy to the bracket using the two M5×16 set screws and the size 2.5 hex key.

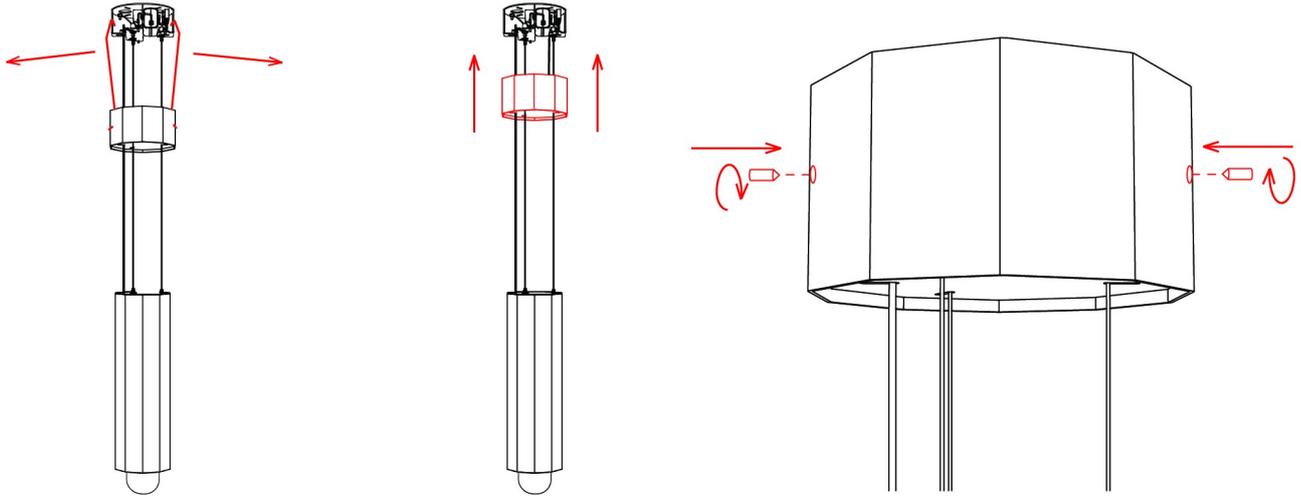


8. INSTALLING THE SHADE 1/2

Press the levers inside the metal fixture down towards the light source. The levers will remain in the vertical position, leaving space for insertion of the shade.

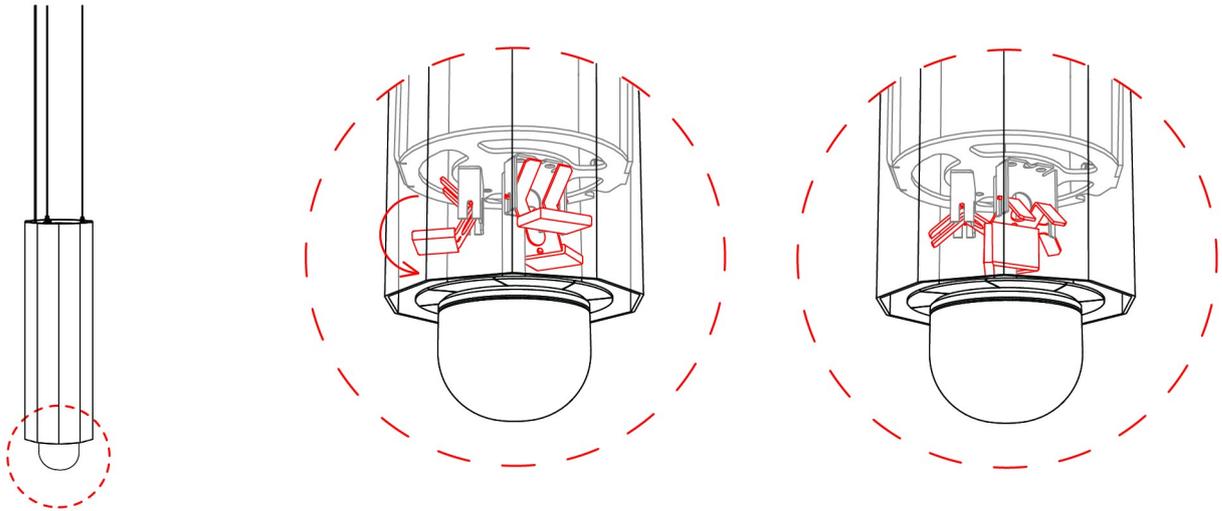

9. INSTALLING THE SHADE 2/2

Insert the shade into the metal fixture until the levers snap closed. Gently pull on the shade to ensure it is locked in place.

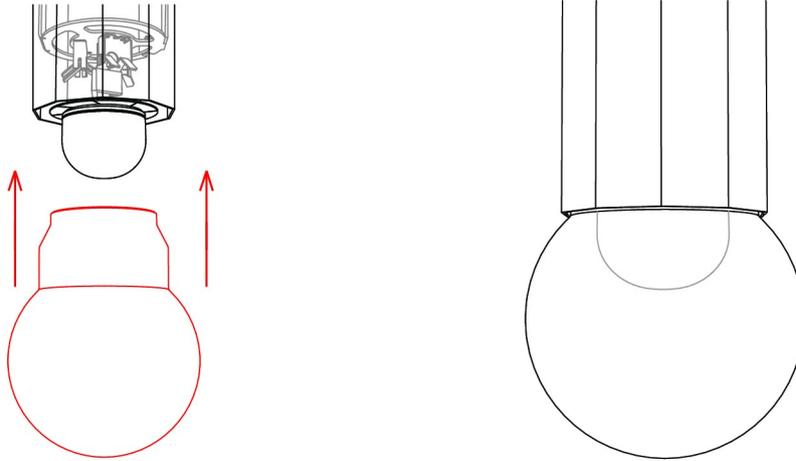

10. SWITCHING ON THE LIGHT

Restore power at the main electrical panel and verify that the light works properly.

