


Mounting	Pendant	Source (included)		Marking	(€ P20 □
Environment	Indoor	SMD led module 10w 2700K 1000lm Dimmable by TRIAC - Trailing edge (standard)		Weight	1,5kgs
Lampshade	Glass	DALI and CASAMBI on request.		6 11 1.	2000mm adjustable.
Frame	Cord & Metal	Voltage	230 V - 50 hz	Cord lenght	other length on request.



LIGHT DISTRIBUTION

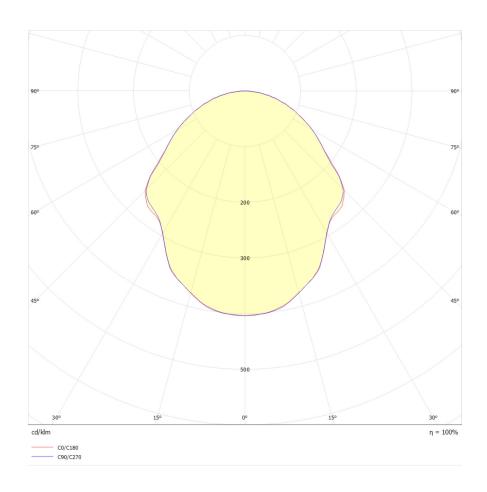

PHASE-CUT DIMMING

All our products are delivered and tested with analog phase-cut dimming capability.

DALI

For most situations phase-cut dimming is the right way but for new projects for your modern home or for hospitality projects you may need the digital standard DALI.

We also provide on request led drivers for DALI system, contact us!

CASAMBI

Use your phone as a switch or dimmer.
We provide the good solution with the Casambi system. Ask for it!