


1. Please read installation guide thoroughly before installation.
2. Certified electrician is required for electrical installation.
3. **Do not, under any circumstance, hold light object by the acrylic tube.**
4. LED driver included, installation of LED driver requires certified electrician.
5. Minimum of 3 people recommended for installation.
6. The light source contained in this light object shall only be replaced by the manufacturer or his service agent of similar qualified person.
Contact manufacturer for service.
7. Before opening box make sure to open the top side according to the 'THIS SIDE UP' sign.
8. Do not take Tube Pendant out of box before finishing the first 5 steps.

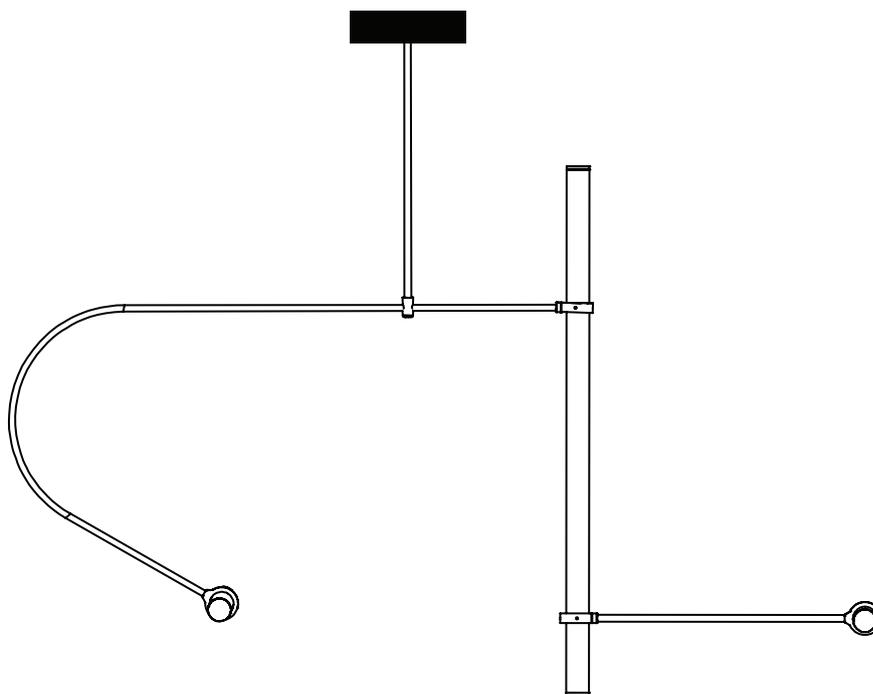

IMPORTANT

Do not, under any circumstance, hold, use as support, place heavy weight on, wipe clean, lift, rotate or move in any direction the acrylic tube or tubes in this light object. Doing so will waive all product warranties.

Please provide email confirmation that your order and its related components have been received in their entirety and in good condition.

Failure to do so within 48 hours of delivery will waive all product warranties.

PROVIDED SUPPLIES


- | | |
|--------------------------|----------------------|
| 1. Tube Pendant No. 2 | 4. Tube Pendant stem |
| 2. LED driver | 5. Hanging Template |
| 3. Canopy assembly parts | 6. Male monopoint |

1

Tape provided 1:1 printed template to ceiling at desired location and install male monopoint at the specific location indicated on the template.


NOTE

Anchor point should be capable of supporting 25 kg and therefore adequate blocking or toggle bolts are required for proper support at the location of male monopoint.

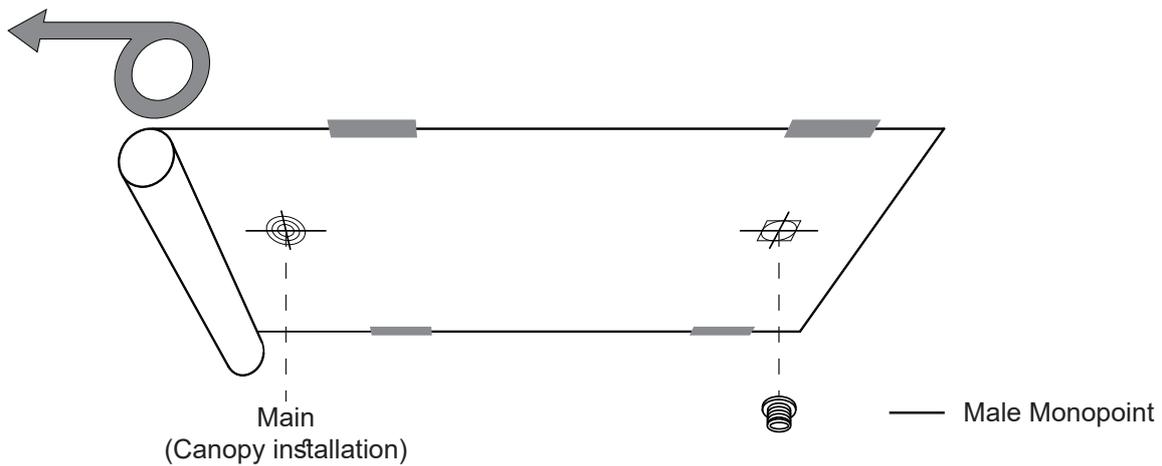

2


Firmly connect the canopy ceiling plate to ceiling with 4 screws and relevant plugs (not included).

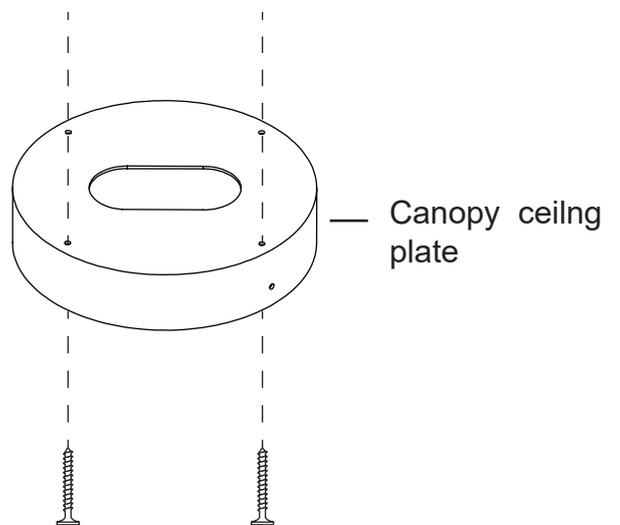


- 3** Shut down associated electrical breaker and secure LED driver to top plate of canopy. Then wire LED driver to power source using brown and blue wires.

IMPORTANT NOTE:


Some light objects come with LED driver already connected to the canopy top plate. In this case, shut down associated electrical breaker and connect canopy top plate to ceiling then continue to wire LED driver to power source using brown and blue wires.

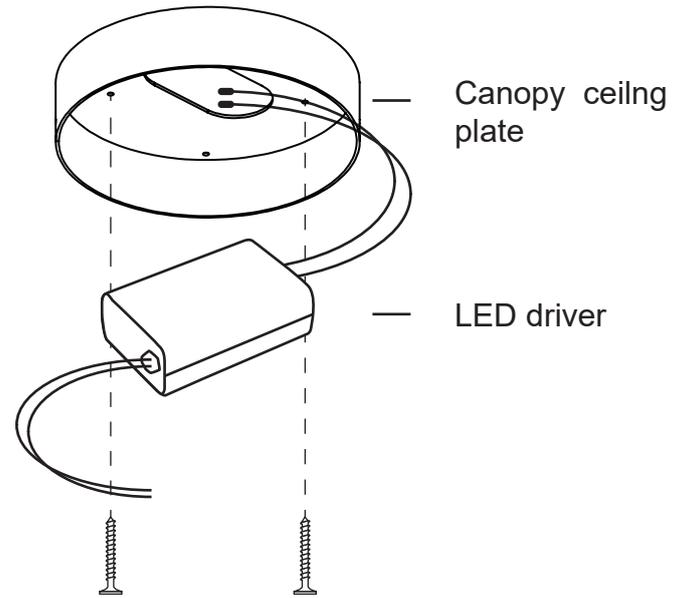

- 4** Screw Tube Pendant stem to the light object wiring the electrical wires through the stem. Do not take Tube Pendant out of box.

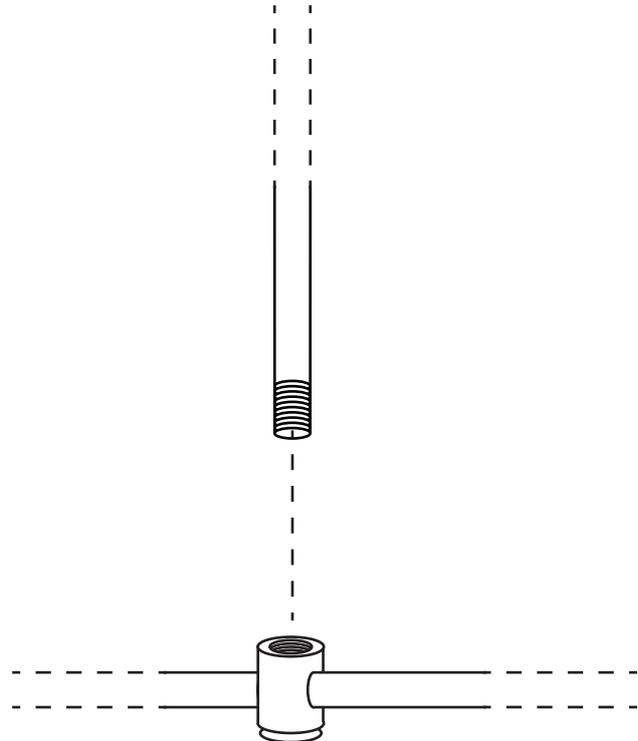


5 Connect canopy bridge and canopy plate to Tube Pendant stem using the canopy and lock nuts. Make sure to wire through the electricla wires.

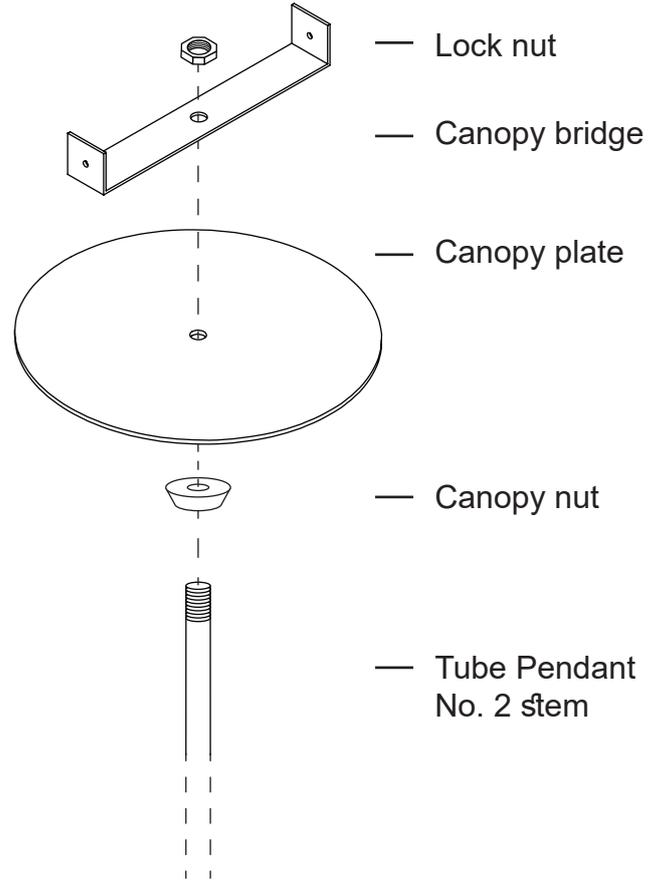


6 Take the Tube Pendant No.2 out of the box. Make sure to hold the Tube Pendant at the brass parts. Do not hold acrylic tubes as they are fragile.

NOTE

All wraps should be gently removed after installation of Tube Pendant No.2.

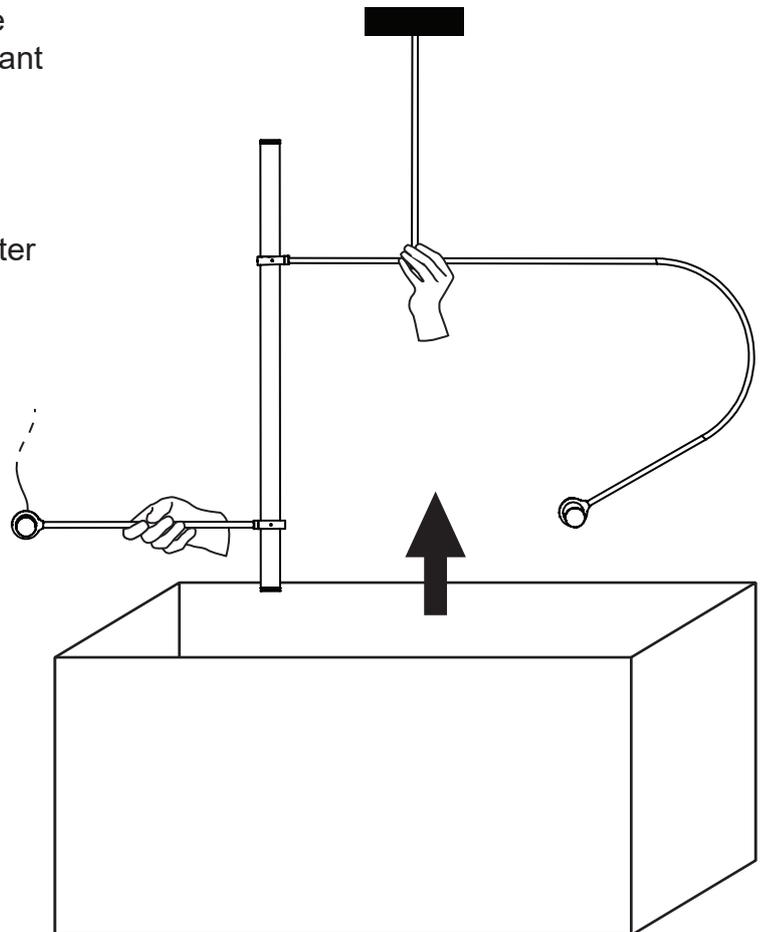

- 7** Use the black and red wires from the LED driver to wire Tube Pendant No. 2 to the LED driver. Once wired, secure Tube Pendant No. 2 to the canopy top plate using screws.

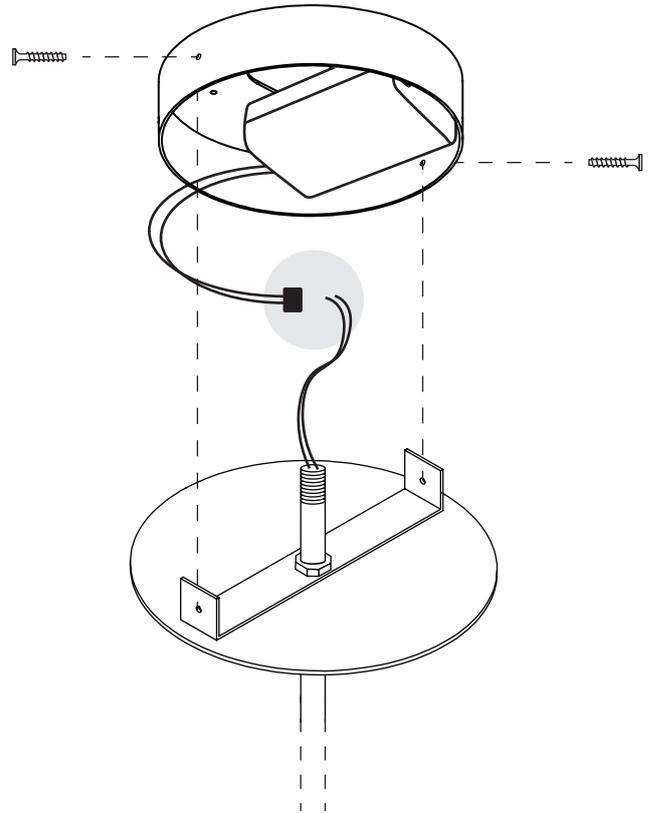

- 8** Secure the fixture by attaching the female monopoint to the male monopoint that was previously installed on the ceiling in the correct location. Gently remove Tube Pendant protection wrapping.

IMPORTANT

Monopoint cable length is set at 78 cm for the stability of this tube pendant. Do not change this length as it may damage the acrylic tubes of Tube Pendant.

