



Image shown above 84.14 with round canopy

± Ø100 - 120mm

Series	84

Mounting Ceiling mounted

Glass Colour Clea

Lamp 1W LED, 2700K, 100lm (2500K and 3000K options available)

10W Xenon, 2600K, 81Im

Coaxial Length 3000mm standard / up to 30500mm maximum

Adjustable length: 84.1 - 84.9 Non-adjustable Length: 84.11 - 84.61

Canopy Finishes 84.1 - 84.7: white, black or brushed nickel canopy

84.9 - 84.61: white canopy

Materials Blown glass, copper mesh, braided metal coaxial cable,

electrical components, steel canopy

Power Supply Integral

Remote mounted for 84.1m

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

Environment Indoor, dry location. IP30

Note Every single Bocci product is handmade. Each one is variously

blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are

individual, irregular expressions of our research.

Patent # US Patent pending

EU 003611144-0001 to 0004

Certifications



Weight (kg)



Round

84.1	2
84.3	6.5
84.5	10.7
84.7	15.2
84.13	29.6
84.14	40.2
84.26	67.7
84.36	91.4
84.19	45.8
84.37	84.8
84.61	139



Square

84.11	36.6
84.26	69.5
84.36	113.4




Rectangle


84.9	28.2
84.11	36.6
84.14	39.5
84.20	67.7
84.26	80
84.36	91.8



ADJUSTABLE LENGTH

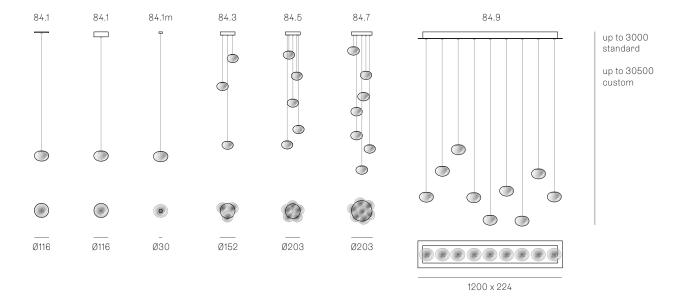

NON-ADJUSTABLE LENGTH

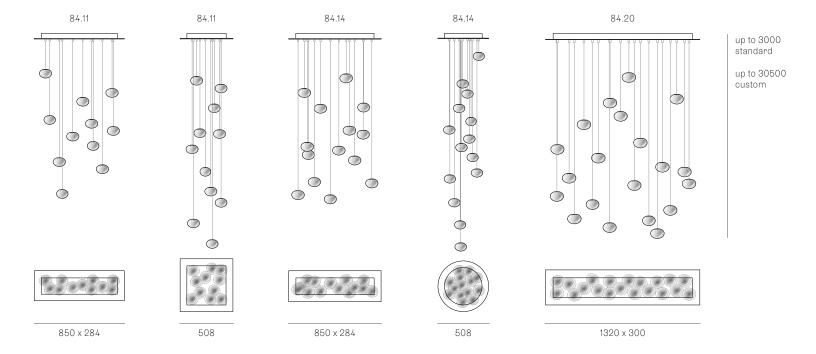


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:


- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.




NON-ADJUSTABLE LENGTH






1000 x 335









600






1100 x 370



up to 3000 standard

up to 30500 custom





755

All dimensions are in millimeters (mm) unless otherwise specified.