



THIS IS A LOW VOLTAGE (24VDC) FIXTURE.


Do not install this fixture with other than the intended 24VDC Class 2 Power Unit (LED driver). Also, please ensure that the wiring system complies with NEC requirements. The 24VDC driver must be remotely mounted per the included manufacturer's instructions.


PLEASE HANDLE WITH CARE.

All protective packaging should be left on the fixture (especially the clear protective sleeve that covers the rope) until it is completely installed and all nearby construction is complete. Failure to do so may result in the rope being permanently damaged.




Tracer Loop - Direct Mount

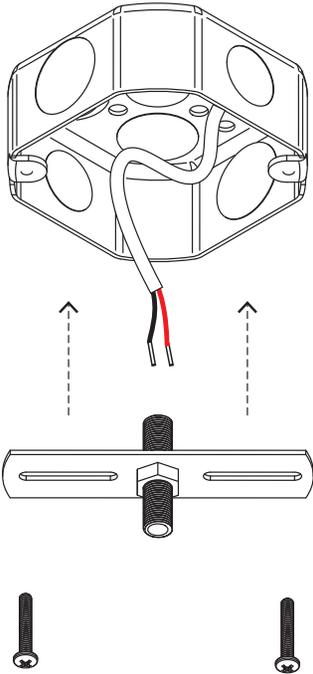


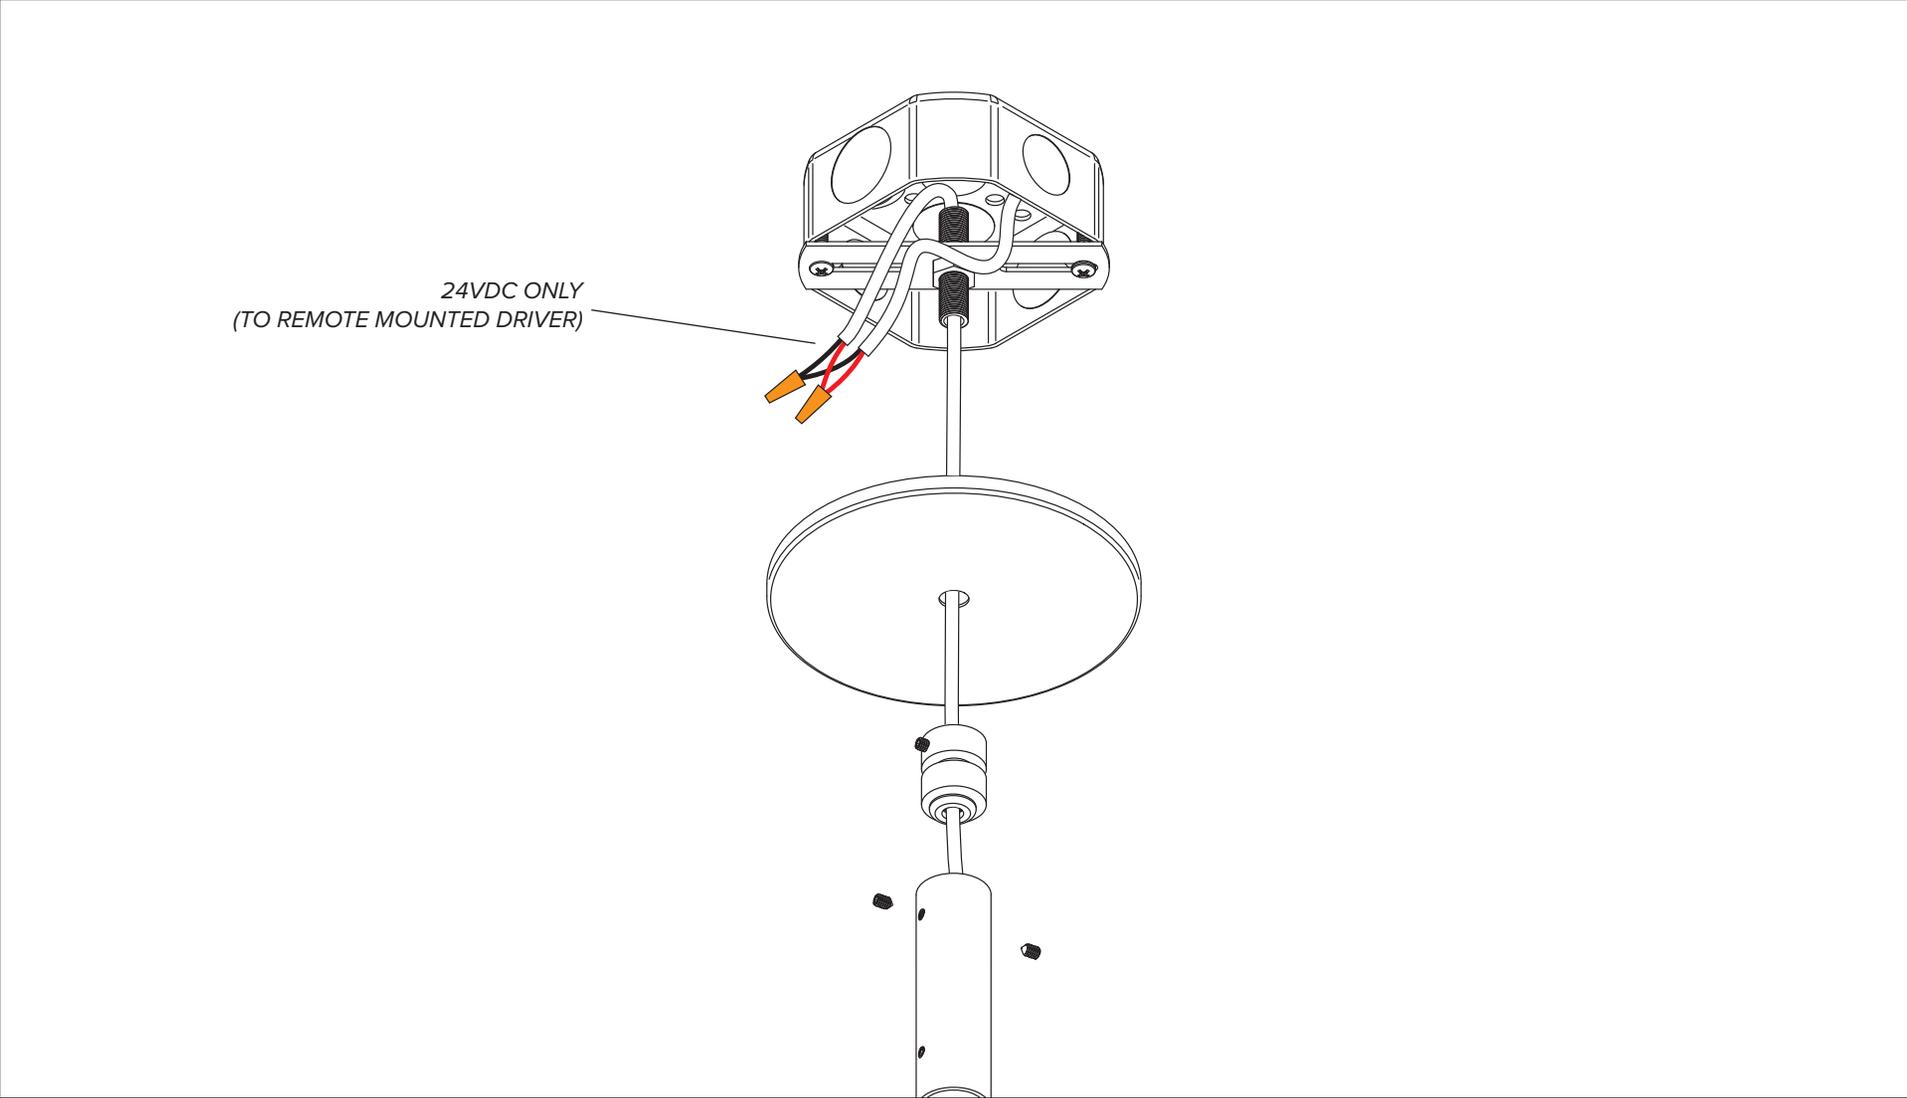


Tracer Loop - Direct Mount


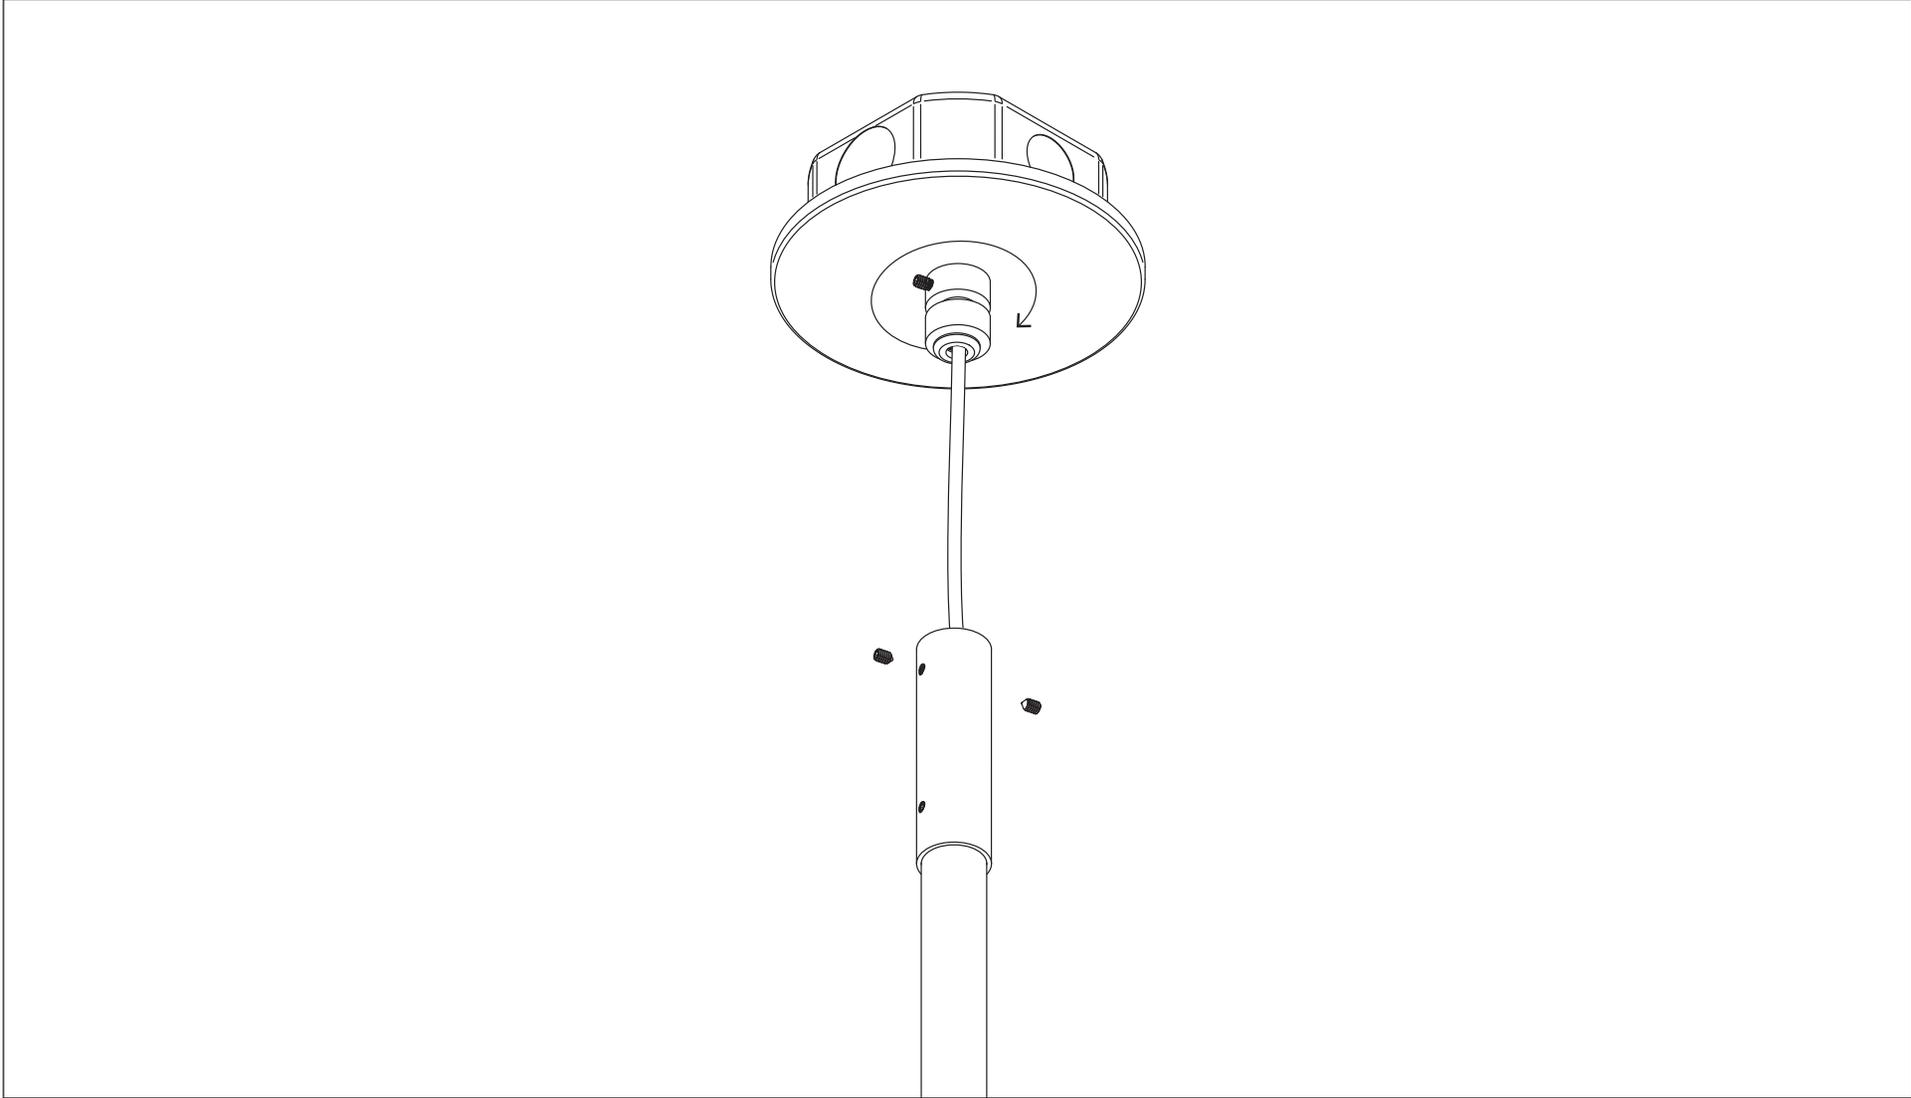


Tracer Loop - Direct Mount

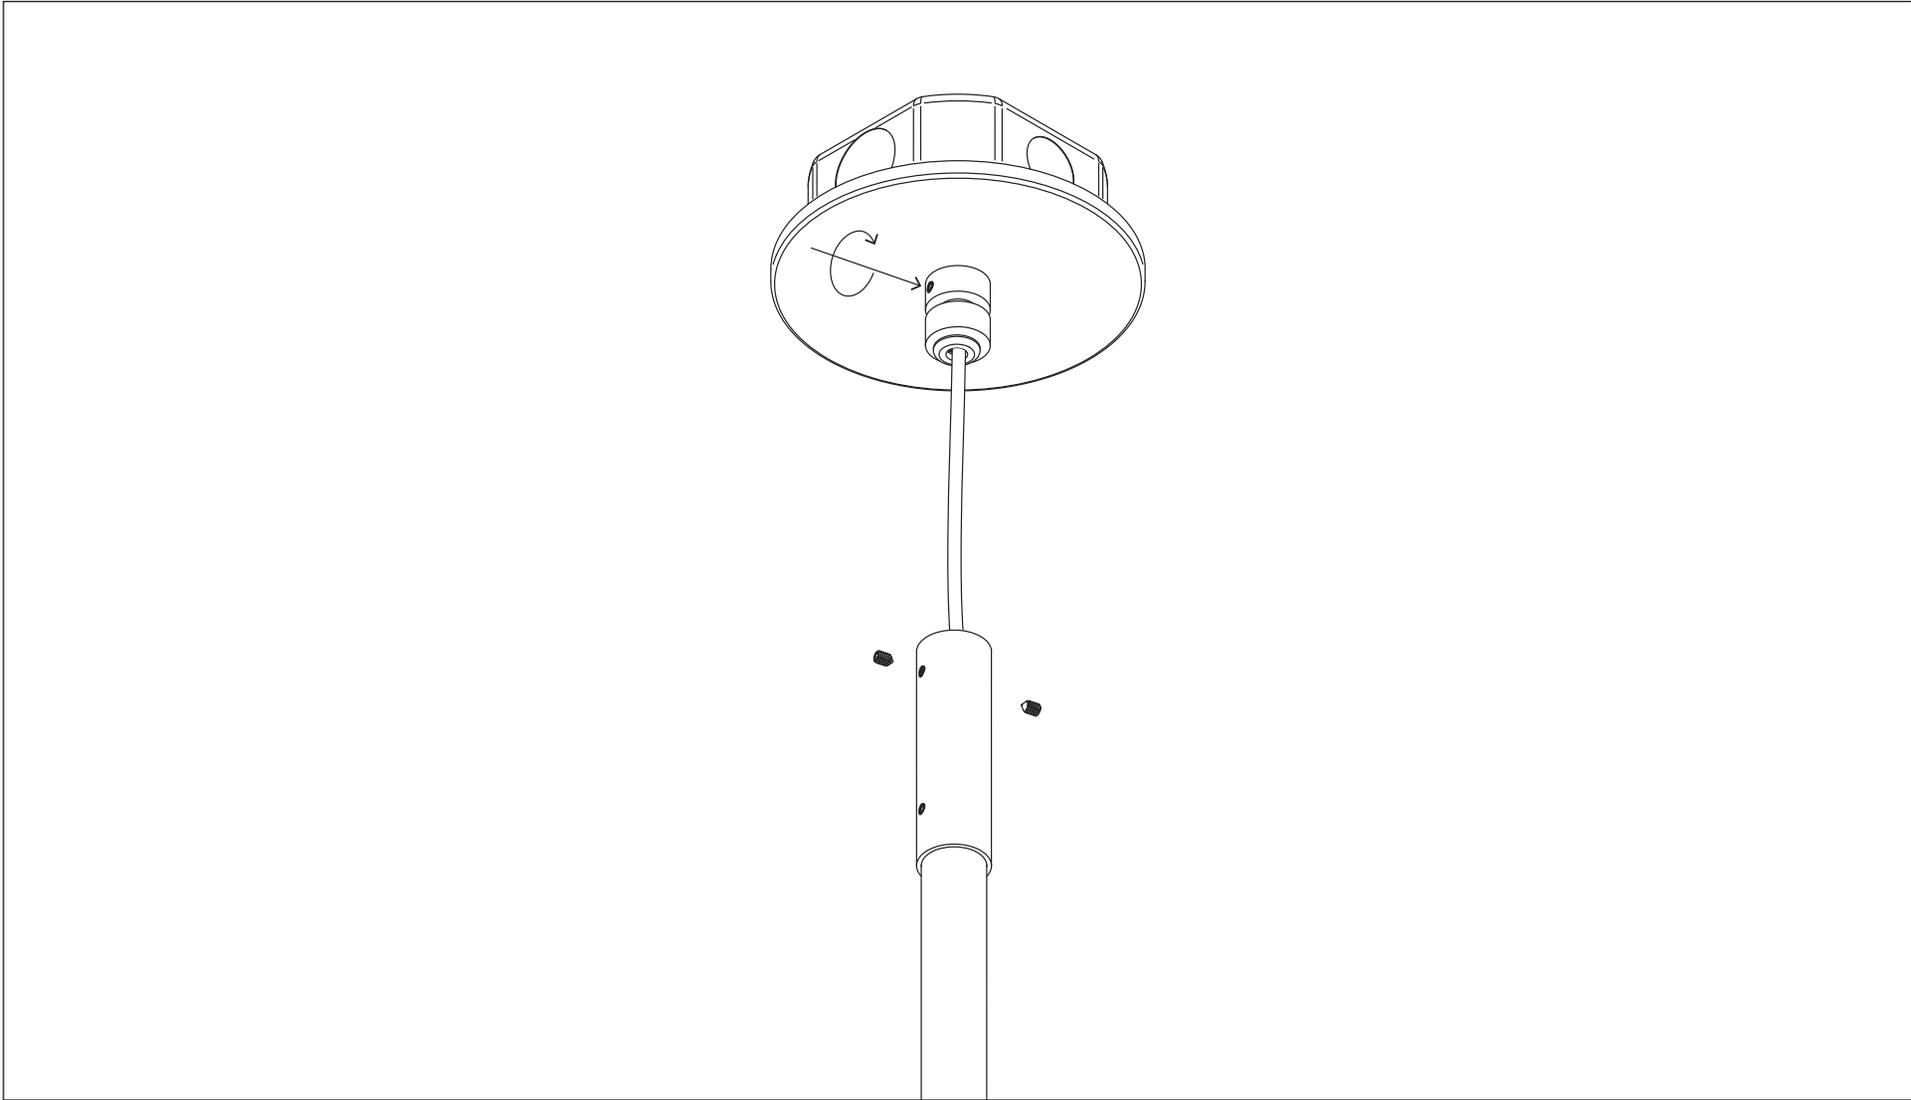

Tracer Loop - Direct Mount

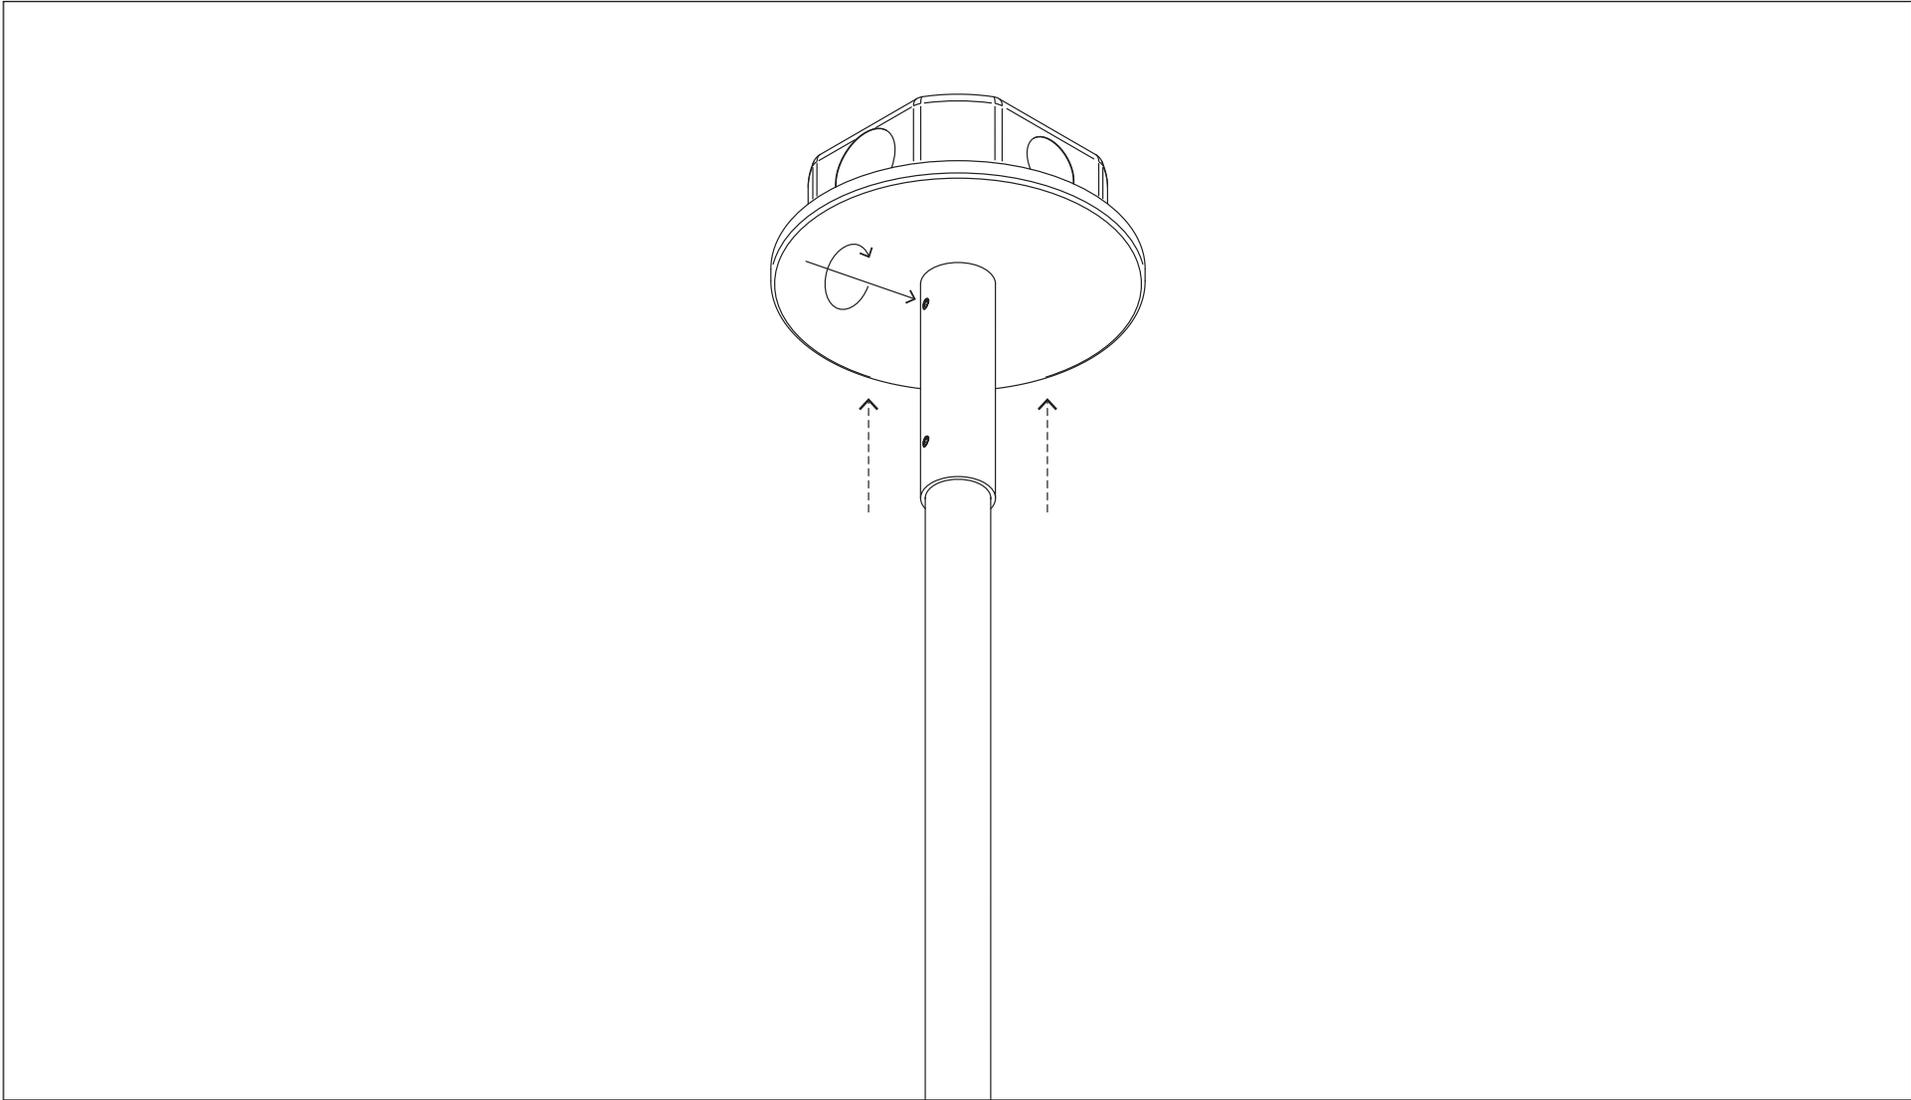

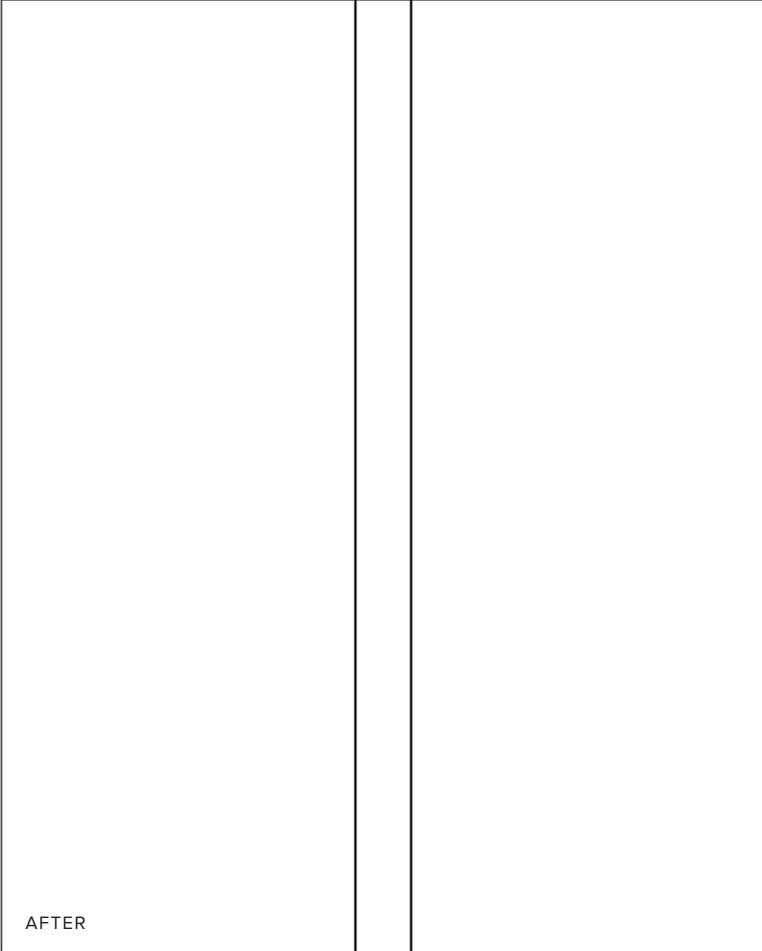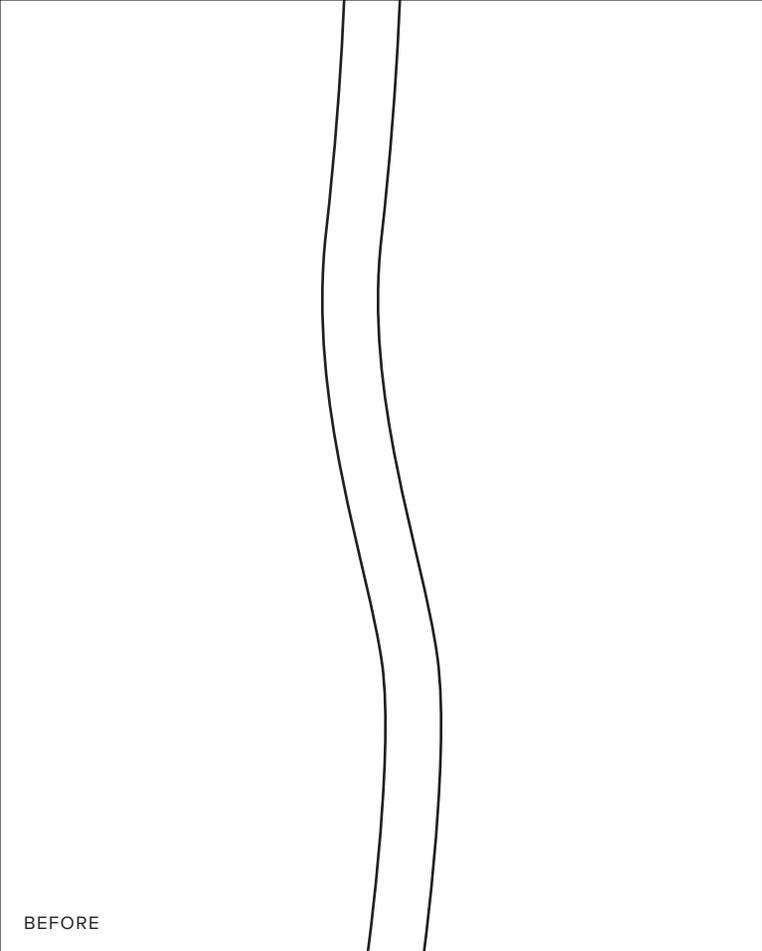

After installation, if the rope appears wavy and does not hang straight, leave the fixture turned on for an hour or so to allow the inner tubing to warm up and soften.

Then, carefully straighten the rope by hand to work out the kinks.