# PLUTO CLEAR

SKU: PLUT-3W-2500K-E12-NT-120V



# 3 WATT | 240 LUMENS | 2500K

Classic, smooth dimmable LED filament lamp. This lamp uses 3 Watts of power and achieves 240 Lumens at a CRI of 95. It has an IP54 rating.

### LAMP

Shape: G14

Materials: Brass cap, glass

Finish: Clear Beam angle: 360' Base: E12 Weight: 0.033 lbs

Working temperature: -5C to 40C

Warm up time: Instant Warranty: 3 years Input Voltage: 110V-120V

Glare control: We use up to 8 LED filaments in our lamps. This, together with a thicker phosphor coating, reduces and controls glare, resulting in an even, more comfortable light.



1.77 in

### **PERFORMANCE**

95
240
80
30,000
2500K
0.9

# DIMMING

Dimmable: Yes


Dimming type: Trailing edge

Recommended US Dimmer: Lutron - Diva DVELV-300P-XX

(X denotes faceplate color)

A full list of compatible dimmers is available on request.

## POLAR DIAGRAM

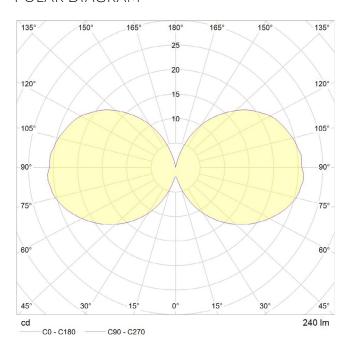

## **OUTER CARTON**

Pc/ Ctn: 100

Gross weight: 7.05lbs Length: 20.5in Width: 11.0in Height: 7.9in IES/LDT FILE

Available upon request.

EAN US: 5060400151233







# PLUTO TINTED

SKU: PLUT-3W-2200K-E12-T-120V



# 3 WATT | 180 LUMENS | 2200K

Classic, smooth dimmable LED filament lamp. This lamp uses 3 Watts of power and achieves 180 Lumens at a CRI of 95. It has an IP54 rating.

### LAMP

Shape: G14

Materials: Brass cap, glass Finish: Iron tinted Beam angle: 360' Base: E12 Weight: 0.033 lbs

Working temperature: -5C to 40C

Warm up time: Instant Warranty: 3 years Input Voltage: 110V-120V

**Glare control:** We use up to 8 LED filaments in our lamps. This, together with a thicker phosphor coating, reduces and controls glare, resulting in an even, more comfortable light.



3.15 in

1.77 in

### **PERFORMANCE**

00
OK

# DIMMING

Dimmable: Yes


Dimming type: Trailing edge

Recommended US Dimmer: Lutron - Diva DVELV-300P-XX

(X denotes faceplate color)

A full list of compatible dimmers is available on request.

## POLAR DIAGRAM

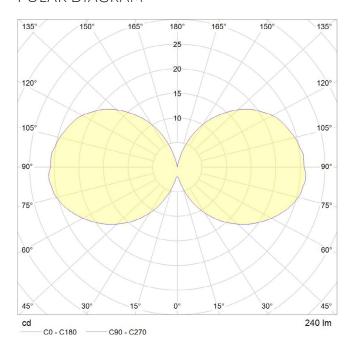

## **OUTER CARTON**

Pc/ Ctn: 100

Gross weight: 7.05 lbs Length: 20.5in Width: 11.0in Height: 7.9in IES/LDT FILE

Available upon request.

EAN US: 5060400151226





