

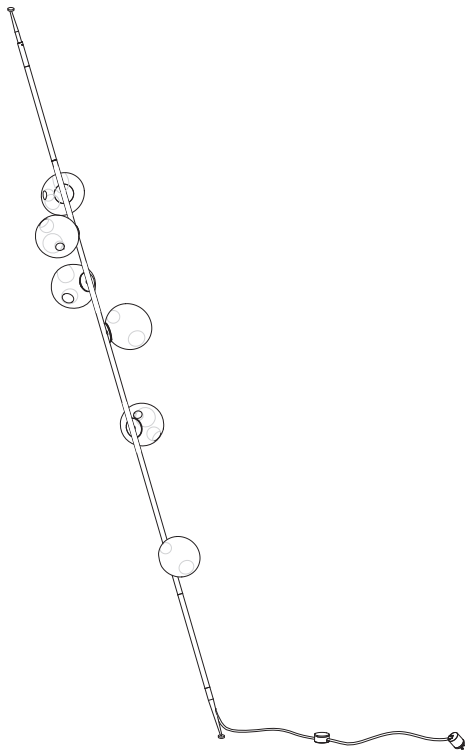


Image shown above 28.6 Column

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series        | 28, 38V, 57, 73, 84, 84V, 100, 118                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Glass Colours | 28: Clear, colour pendants<br>38V: Clear<br>57: Grey, white, light mirror, dark mirror<br>73: Clear, grey 1, grey 2, grey 3<br>84: Clear/copper<br>84V: Clear/copper<br>100: Clear, grey<br>118: White, bronze                                                                                                                                                                                                                                                                               |
| Lamp          | 1W LED, 2700K, 100lm (2500K and 3000K options available)                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Plug Types    | Type A - 110V<br>Type C - 230V<br>Type G - 230V<br>Type I - 230V                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Extenders     | 2 x 153mm and 2 x 305mm extenders included. Additional extenders available, sold separately.                                                                                                                                                                                                                                                                                                                                                                                                 |
| Cable Length  | 2290mm black flexible cord                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Finishes      | Brass or black powder coated stem<br>Brass dial control                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Materials     | Blown glass, brass stem, electrical components                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Power Supply  | Integral, dial control with build-in dimmer                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Environment   | Indoor, dry location. IP20                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Note          | <p>The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment.</p> <p>Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.</p> |

|          |                                                                                                                                                                                                                                                                                                            |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Patent # | 28: US D687,740<br>EU 001695834-001 to 004<br><br>38V: EU 002071019-001<br><br>57: US D796732<br>EU 002268581-0001 to 0006<br><br>73: US D762,323 S<br>EU 002633230-0001 - 0003<br><br>84: EU 003611144-0001 to 0004<br><br>100: US D1027 281S<br>EU 008526131-0001<br><br>118: Worldwide patents pending. |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Certifications

CE

UK

CA


UL

-NOM

MX


|             |       |       |
|-------------|-------|-------|
| Weight (kg) | XXX.3 | XXX.6 |
| 28          | 7     | 11    |
| 38V         | 10    | 16    |
| 57          | 8     | 12    |
| 73          | 10    | 17    |
| 84          | 9     | 14    |
| 84V         | 10    | 16    |
| 100         | 10    | 15    |
| 118         | 9.9   | -     |

28




± Ø157 - 171

38V



± Ø190 - 215

57



± 100 - 150

73



± 230 - 380

± 120 - 150

84



± Ø110 - 120

± 110 - 120


84V



± Ø110 - 130

± 90 - 75


100



± 210 - 170

± 210 - 170


118



± Ø130 - 146

Short extender  
153mm

Long extender  
305mm

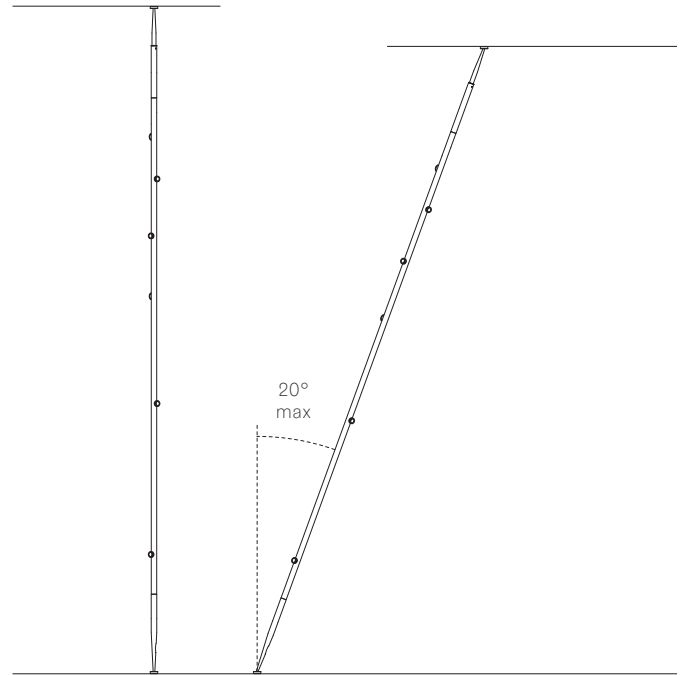

| Extender                                                                                                                                                                                                                                                                                                                                           | # of Extender         | Min, Max Installed length |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------------|
|                                                                                                                                                                                                                                                                                                                                                    | 0                     | 2423 min<br>2495 max      |
|                                                                                                                                                                                                                                                                 | 1 x short             | 2576 min<br>2648 max      |
|                                                                                                                                                                                                                                                                 | 1 x long              | 1801 min<br>2729 max      |
|                                                                                                                                                                              | 1 x short<br>1 x long | 2881 min<br>2953 max      |
|                                                                                                                                                                              | 2 x long              | 3033 min<br>3105 max      |
|                                                                                          | 1 x short<br>2 x long | 3186 min<br>3258 max      |
|                                                                                          | 3 x long              | 3338 min<br>3410 max      |
|     | 1 x short<br>3 x long | 3491 min<br>3563 max      |
|     | 4 x long              | 3643 min<br>3715 max      |


All dimensions are in millimeters (mm)  
unless otherwise specified.

This diagram is meant to illustrate some the extender combinations for the columnar stem fixtures.

Each column comes with 2 short extenders and 2 long extenders.

**Maximum 2 extenders per end for 28, 57, 73, 84, 84V and 100.**

**Maximum 1 extender per end for 38V and 118.**

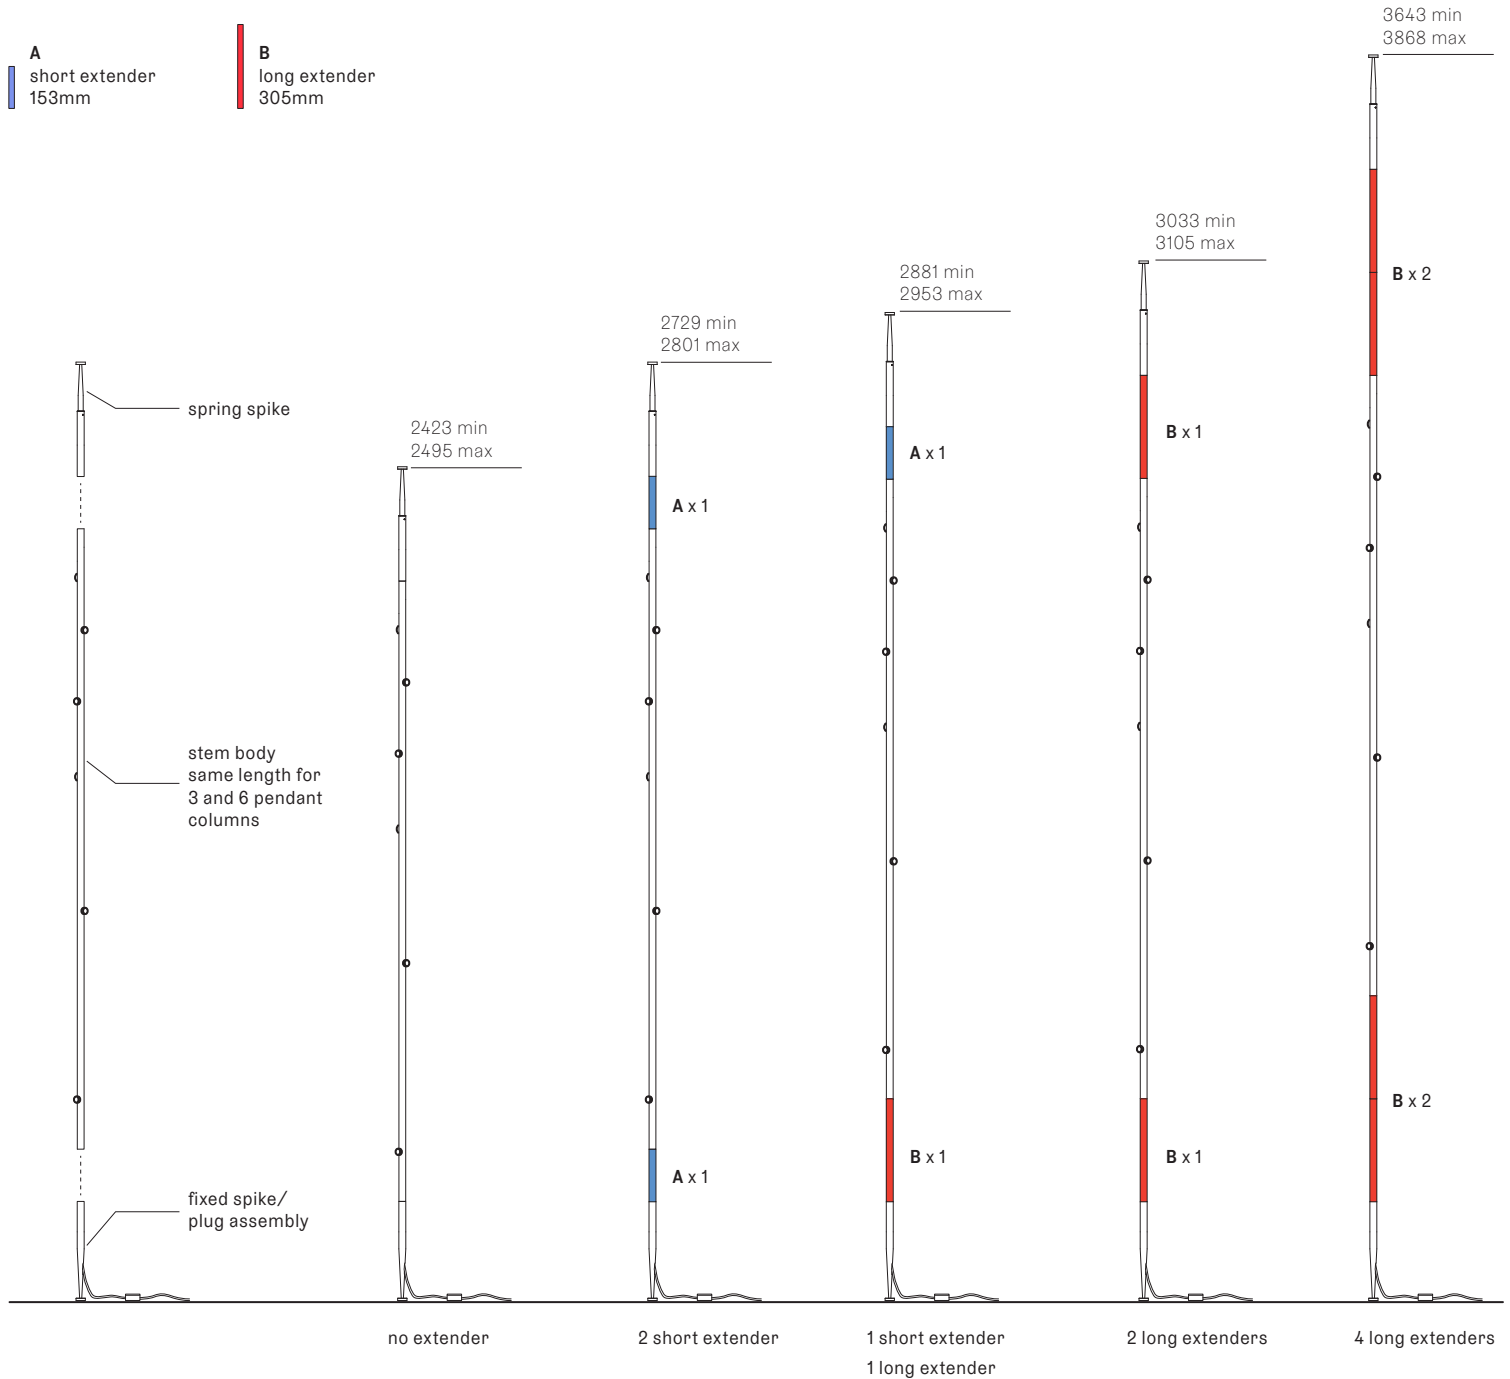

All dimensions are in millimeters (mm) unless otherwise specified.