

FLOS

F6607046 Bronze

Taccia (PMMA)


Designed by Achille and Pier Giacomo Castiglioni, 1962

28W - 2700K

Table lamp providing indirect and reflected light. Reflector in painted aluminium, gloss white on the outside and matt white on the inside. Directionable diffuser in transparent PMMA. Body in matt black or naturally anodized extruded aluminium. Base in nickel-plated metal. Electric cable of useful length 220 cm, with dimmer switch for ON/OFF and adjustment of the light flow between 10-100%. Plug-in power supply with interchangeable plugs.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Table
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Power (W)	28

Physical



Colour	Bronze
Length (mm)	190
Cord colour	Black
Cord length (mm)	2200
Net weight (kg)	7.6
Package volume (m3)	0.18
IP internal	20

Download

Mounting instructions	Download PDF
Mounting instructions	Download PDF

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

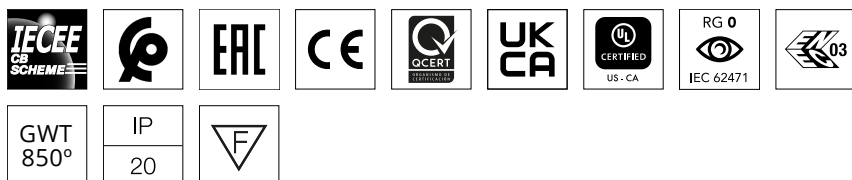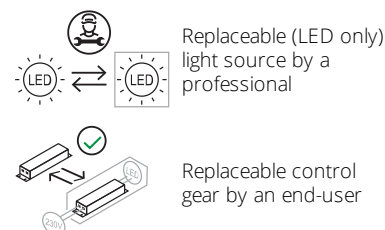


Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	2700
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

Spare Parts

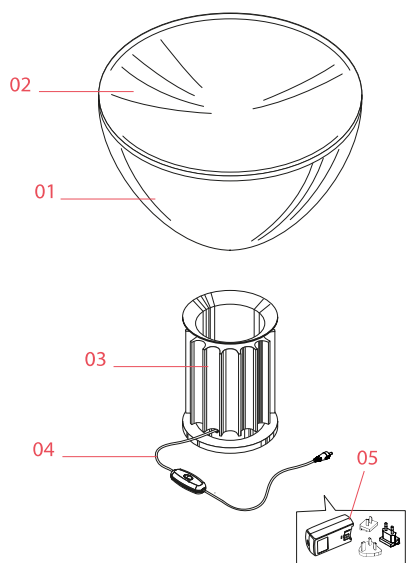

01.	Taccia LED transparent diffuser & reflector (PMMA)	F6609000
02.	Taccia led White reflector	RF00780
03.	Taccia led Anodized bronze base	F6608046
04.	Taccia Led Jack plug with cable and push dimmer	RF6608100
05.	Black plug assembly kit & 48V driver	RF6600130



F6609000

Taccia LED transparent diffuser & reflector (PMMA)



RF00780

Taccia led White reflector



F6608046

Taccia led Anodized bronze base



RF6608100

Taccia Led Jack plug with cable and push dimmer



RF6600130

Black plug assembly kit & 48V driver