


ALL OPERATIONS MUST BE CARRIED OUT BY QUALIFIED PERSON


- ① Separate the ballast from the base by unscrewing the screws.

Separare la zavorra dalla base svitando le viti.

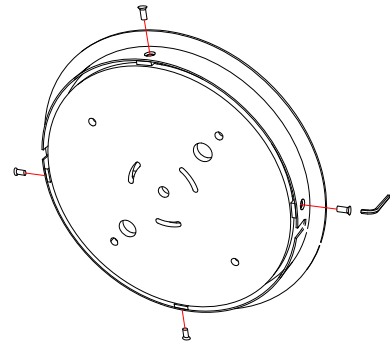

- ② Fix the lamp body to the base, matching the threaded pins to the holes and insert the cable through the hole of the base.

Fissare il corpo della lampada alla base, facendo corrispondere i perni filettati ai fori e facendo passare il cavo attraverso il foro della base.

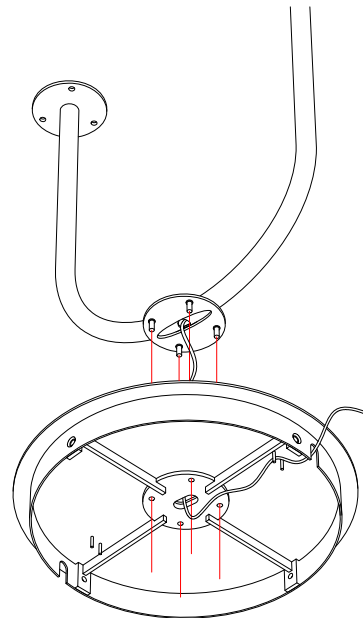

- ③ Secure the threaded pins with the nuts. Secure the cable using the supplied cable clamps.

Fissare i perni filettati tramite i dadi.
Fissare il cavo tramite i fermacavi forniti.

