
moooi

Hubble Bubble

MARCEL WANDERS | POWERED THROUGH ELECTROSANDWICH® BY MARCEL WANDERS

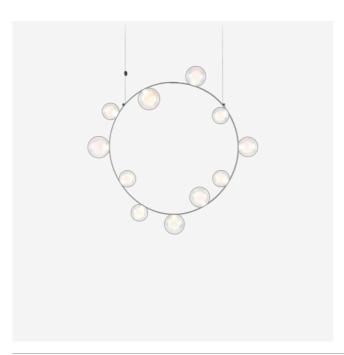

Hubble Bubble, designed by Marcel Wanders, is an airy and joyful suspension lamp. Available in two sizes, with either 7 or 11 glass LED bubbles in oil-iridescent or frosted versions. Hubble Bubble can be hung both horizontally and vertically and is powered through Electrosandwich® by Marcel Wanders. Hubble Bubble is the cheery statement piece in your home that can hang from any angle.

Detailing




Hubble Bubble is powered through Electrosandwich® technology, so the bubbles don't need any additional wiring

Colours

Hubble Bubble

Hubble Bubble / 11

Dimensions

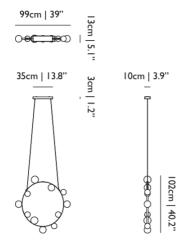

Product

width $99cm \mid 39"$ Height $102cm \mid 40.2"$ DEPTH $10cm \mid 3.9"$ WEIGHT NETTO $1.5kg \mid 3.31lbs$

Packaging

width $86.3 \, \mathrm{cm} \, | \, 34"$ Height $15 \, \mathrm{cm} \, | \, 5.9"$ Cubage $0.12 \, \mathrm{m}^3 \, | \, 4.17 \, \mathrm{ft}^3$ Length $91.3 \, \mathrm{cm} \, | \, 35.9"$ Weight $1.5 \, \mathrm{kg} \, | \, 3.31 \, \mathrm{lbs}$

Technical CE

MATERIAL

Metal frame, polycarbonate light guides and glass bulbs

FΝ	FR	GΥ	ΙΔ	R	FΙ

В

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

11

INPUT VOLTAGE

220-240V

MAX POWER CONSUMPTION

20W

LIFETIME

50000 hours

CABLE LENGTH

250cm | 98.4"

COLOUR TEMPERATURE

2700 K

LIGHT DIRECTION

All directions

EEI

0.43

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Round

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Matching metal rectangle

CRI

93

LIGHT OUTPUT

530 lm

EFFICIENCY

26.5 lm/W

MEASURED POWER CONSUMPTION

17W

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical UL

MATERIAL

Metal frame, polycarbonate light guides and glass bulbs

ENERGY LABEL INSTALLATION REQUIRED

B Yes

LIGHTSOURCE TYPE LIGHTSOURCE INCLUDED

LED

NUMBER OF LIGHTSOURCES SHAPE

11 Round

INPUT VOLTAGE FREQUENCY

110-130V 50/60

MAX POWER CONSUMPTIONLAMPHOLDER20WLED (Solid state)

LIFETIME CABLE COLOUR

50000 hours Transparent with tinned cores

CABLE LENGTHCANOPY250cm | 98.4"Matching metal rectangle

COLOUR TEMPERATURE CRI

2700 K 93

LIGHT DIRECTION LIGHT OUTPUT
All directions 530 lm

 EEI
 EFFICIENCY

 0.43
 26.5 lm/W

MEASURED POWER CONSUMPTION DIMMING & LIGHTING CONTROL


17W Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.

C UL US

Hubble Bubble / 7

Dimensions



Product

Yes

WIDTH 73cm | 28.7" **ныднт** 71cm | 28" **DEPTH** 10cm | 3.9" **WEIGHT NETTO** 1.2kg | 2.65lbs

Packaging

width 61cm | 24" **неіднт** 15ст | 5.9" **CUBAGE** $0.06 \text{m}^3 \, | \, 1.97 \text{ft}^3$ **LENGTH** 61cm | 24" **WEIGHT** 1.2kg | 2.65lbs

Technical CE

MATERIAL

LIFETIME

Metal frame, polycarbonate light guides and glass bulbs

ENERGY LABEL	INSTALLATION REQUIRED

В Yes

LIGHTSOURCE TYPE LIGHTSOURCE INCLUDED

LED

NUMBER OF LIGHTSOURCES SHAPE Round

INPUT VOLTAGE FREQUENCY 220-240V 50/60

MAX POWER CONSUMPTION LAMPHOLDER

10W LED (Solid state)

CABLE COLOUR 50000 hours Transparent with tinned cores

CABLE LENGTH CANOPY

250cm | 98.4" Matching metal rectangle

COLOUR TEMPERATURE CRI 2700 K 93

LIGHT OUTPUT LIGHT DIRECTION 306 lm All directions

EFFICIENCY EEI 0.33 30.6 lm/W

MEASURED POWER CONSUMPTION

7W

DIMMING & LIGHTING CONTROL

Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.



Technical UL

MATERIAL

Metal frame, polycarbonate light guides and glass bulbs

ENERGY LABEL INSTALLATION REQUIRED

B Yes

LIGHTSOURCE TYPE LIGHTSOURCE INCLUDED

LED

NUMBER OF LIGHTSOURCES SHAPE

7 Round

INPUT VOLTAGE FREQUENCY110-130V
50/60

30/00

MAX POWER CONSUMPTIONLAMPHOLDER10WLED (Solid state)

LIFETIME CABLE COLOUR

50000 hours Transparent with tinned cores

CABLE LENGTH250cm | 98.4"

CANOPY

Matching metal rectangle

COLOUR TEMPERATURE CRI

2700 K 93

LIGHT DIRECTION LIGHT OUTPUT
All directions 306 lm

 EEI
 EFFICIENCY

 0.33
 30.6 lm/W

MEASURED POWER CONSUMPTION DIMMING & LIGHTING CONTROL

7W Mains, Trailing edge, Reverse phase

See last page for more information about the dimming possibilities.

CUL)US

Hubble Bubble / Spheres 11

Product Packaging

 width 99cm | 39"
 width 25.5cm | 10"

 height 102cm | 40.2"
 height 31cm | 12.2"

 DEPTH $10 \text{cm} \mid 3.9$ "
 CUBAGE $0.07 \text{m}^3 \mid 2.37 \text{ft}^3$

 WEIGHT NETTO $1 \text{kg} \mid 2.2 \text{lbs}$ LENGTH $85 \text{cm} \mid 33.5$ "

WEIGHT 1kg | 2.2lbs

Technical

MATERIAL

Metal frame, polycarbonate light guides and glass bulbs

Hubble Bubble / Spheres 7

Product Packaging

Technical

MATERIAL

Metal frame, polycarbonate light guides and glass bulbs