

TECHNICAL SHEET

C-S1D60A | SHORT 1 D60 A

Mounting: Sospensione / Suspension

Environment: Indoor - IP20

Materials: Metallo e vetro / Metal and glass

Input Current: LED 500mA / strip LED 24V


Voltage: 120V 60Hz

Source: Tubo / Tube LED 4,5W | Sfera / Sphere LED 9W - CRI=90

Color Temperature: 3000K / 2700K

Lighting Control: Dimmable 0-10V

Cavo / Wire RAL: 9005

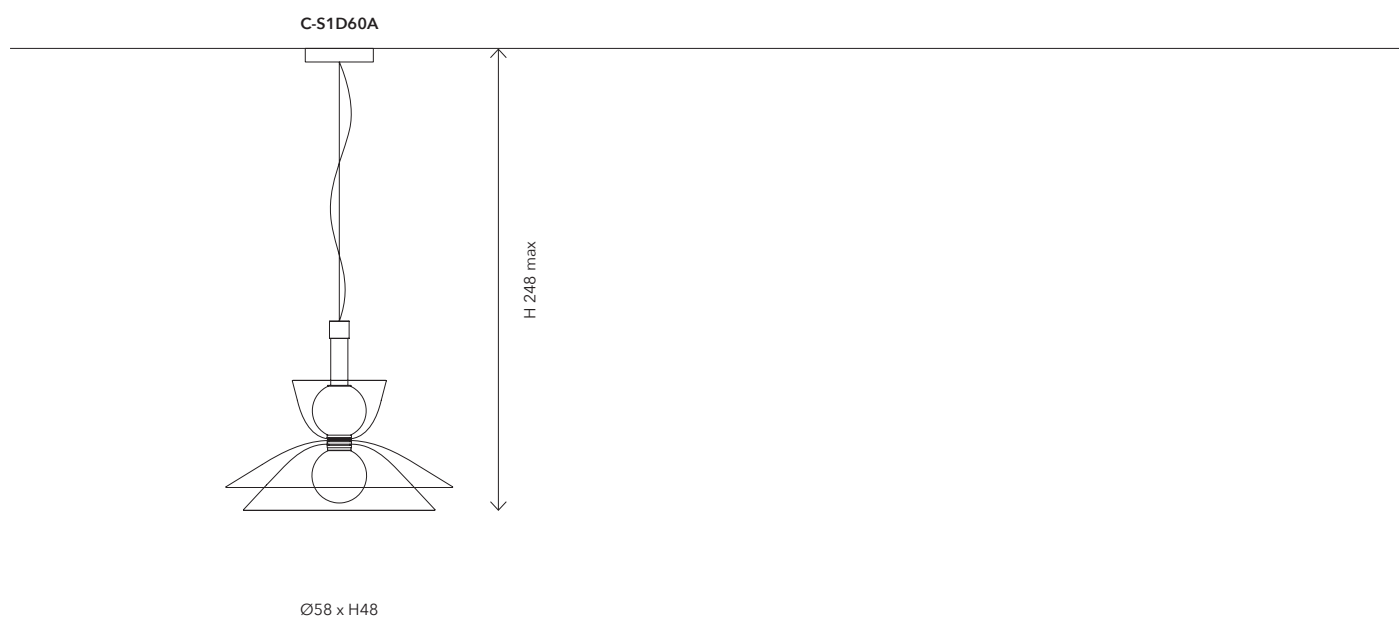

Finiture / Finishes

Struttura / Structure



Vetro bianco acidato
White etched glass

Sfere / Sphere



Vetro nero fumè
Black fumè glass



Vetro oro opaco
Matt gold glass




Vetro blu opaco
Matt blue glass



Vetro rosa opaco
Matt rose glass

Piatti / Plates



Vetro trasparente
Transparent glass



Vetro nero fumè
Black fumè glass



Vetro blu trasparente
Transparent blue glass



Vetro rosa trasparente
Transparent rose glass

NOTE:

Verificare quota H max nel disegno illustrativo

Check max H dimension in the illustrative drawing