


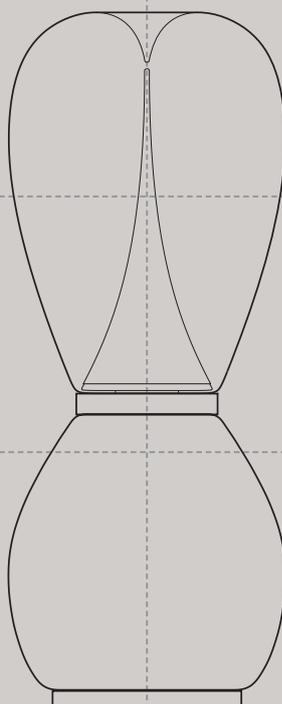


# BOND

Designed by Martin Opl



TECHNICAL SHEET

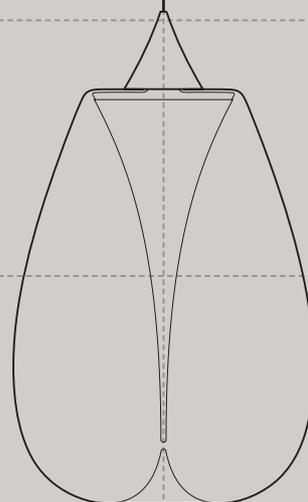

SANS SOUCI



## TECHNICAL DETAILS

---

<b>Glass finishing:</b>	Clear with inner sandblasting, Metal nanocoating finish
<b>Metal parts:</b>	Polished stainless steel
<b>Canopy included:</b>	Yes
<b>Usage:</b>	Indoor

---

## ELECTROTECHNICAL DETAILS

---

<b>Cord colour:</b>	Cable with black braid
<b>Cord length:</b>	1800 mm / 70,87 inch
<b>Light source type:</b>	1x G9
<b>Socket:</b>	Conventional source
<b>Light source included:</b>	Yes
<b>Colour temperature &amp; Dimming:</b>	2700 K / Dimmable (recommended color temperature)
<b>Input voltage:</b>	220-240 V, 50-60 Hz (CE) / 110-120 V, 50-60 (UL)
<b>Rated power:</b>	max 5 W
<b>Protection rating:</b>	IP20

---


\* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

\*\* Lighting fixtures are designed for decorative purposes only.

\*\*\* Please contact your salesperson if you require compatibility with the DALI system.

\*\*\*\* For UL-compliant installations, a 4-inch junction box is recommended.

## TECHNICAL DRAWINGS

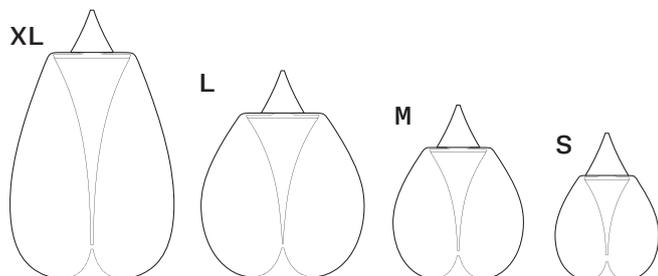

SIZE	Dia (mm/in)	Height (mm/in)
S	250/9,84	355/13,98
M	315/12,40	420/16,54
L	400/15,75	500/19,69
XL	395/15,55	690/27,17

## PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
S	400x400x370 / 15.75x15.75x14.57	4,5 / 10
M	450x450x440 / 17.72x17.72x17.32	6 / 13.2
L	530x530x530 / 20.87x20.87x20.87	8,1 / 17.8
XL	600x530x700 / 23.62x20.87x27.56	10,1 / 22.3

**Attention:**

\* The product requires professional installation.

\*\* Warranty period depends on territory.



## TECHNICAL DETAILS

<b>Glass finishing:</b>	Clear with inner sandblasting, Metal nanocoating finish
<b>Metal parts:</b>	Polished stainless steel
<b>Canopy included:</b>	No
<b>Usage:</b>	Indoor

## ELECTROTECHNICAL DETAILS


<b>Cord colour:</b>	Black
<b>Cord length:</b>	1800 mm / 70,87 inch
<b>Light source type:</b>	2x LED MODULE
<b>Socket:</b>	Integrated LED
<b>Colour temperature &amp; Dimming:</b>	3000 K / Dimmable
<b>Input voltage:</b>	24V DC
<b>Rated power:</b>	20 W
<b>Protection rating:</b>	IP20

\* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

\*\* Lighting fixtures are designed for decorative purposes only.

\*\*\* Please contact your salesperson if you require compatibility with the DALI system.

TECHNICAL DRAWINGS

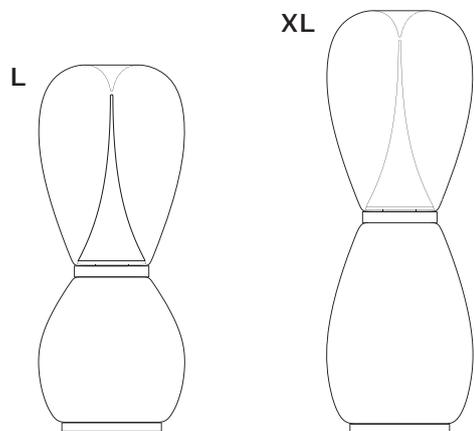

LIGHT

SIZE	Dia (mm/in)	Height (mm/in)
L	400/15,75	1000/30,37
XL	400/15,75	1150/45,28

PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
L	Box 1: 520X520X520 / 20.47x20.47x20.47	25 / 55
	Box 2: 520X520X690 / 20.47x20.47x27.17	
XL	Box 1: 520X520X690 / 20.47x20.47x27.17	26,5 / 58.4
	Box 2: 520X520X690 / 20.47x20.47x27.17	

Attention:

\* The product requires professional installation.

\*\* Warranty period depends on territory.



## TECHNICAL DETAILS

---

<b>Glass finishing:</b>	Clear with inner sandblasting, Metal nanocoating finish
<b>Metal parts:</b>	Polished stainless steel
<b>Canopy included:</b>	No
<b>Usage:</b>	Indoor

---

## ELECTROTECHNICAL DETAILS

---

<b>Cord colour:</b>	Cable with black braid
<b>Cord length:</b>	1800 mm / 70,87 inch
<b>Light source type:</b>	1x G9
<b>Socket:</b>	Conventional source
<b>Light source included:</b>	Yes
<b>Colour temperature &amp; Dimming:</b>	2700 K / Dimmable (recommended color temperature)
<b>Input voltage:</b>	220-240 V, 50-60 Hz (CE) / 110-120 V, 50-60 (UL)
<b>Rated power:</b>	max 5 W
<b>Protection rating:</b>	IP20


---

\* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

\*\* Lighting fixtures are designed for decorative purposes only.

\*\*\* Please contact your salesperson if you require compatibility with the DALI system.

TECHNICAL DRAWINGS



LIGHT

SIZE	Dia (mm/in)	Height (mm/in)
M	314/12,36	390/15,35

PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
M	400x390x480 / 15.75x15.35x18.90	6 / 13.2

Attention:

\* The product requires professional installation.

\*\* Warranty period depends on territory.



## TECHNICAL DETAILS

<b>Glass finishing:</b>	Clear with inner sandblasting, Metal nanocoating finish
<b>Metal parts:</b>	Polished stainless steel
<b>Canopy included:</b>	No
<b>Usage:</b>	Indoor

## ELECTROTECHNICAL DETAILS

<b>Cord colour:</b>	-
<b>Cord length:</b>	-
<b>Light source type:</b>	1x G9
<b>Socket:</b>	Conventional source
<b>Light source included:</b>	Yes
<b>Colour temperature &amp; Dimming:</b>	2700 K / Dimmable (recommended color temperature)
<b>Input voltage:</b>	220-240 V, 50-60 Hz (CE) / 110-120 V, 50-60 Hz (UL)
<b>Rated power:</b>	max 5 W
<b>Protection rating:</b>	IP20


\* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

\*\* Lighting fixtures are designed for decorative purposes only.

\*\*\* Please contact your salesperson if you require compatibility with the DALI system.

\*\*\*\* For UL-compliant installations, a 4-inch junction box is recommended.

## TECHNICAL DRAWINGS

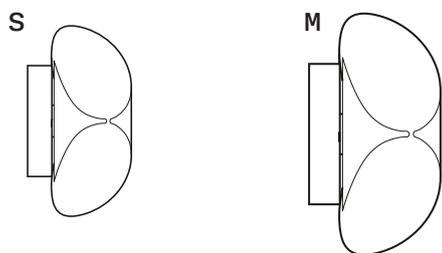

## LIGHT

SIZE	Dia (mm/in)	Height (mm/in)
S	300/11,81	145/5,71
M	400/15,75	188/7,40

## PACKAGING

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
S	390x390x310 / 15.35x15.35x12.20	4 / 8.8
M	500X500X360 / 19.69x19.69x14.17	6 / 13.2

**Attention:**

\* The product requires professional installation.

\*\* Warranty period depends on territory.



## TECHNICAL DETAILS

<b>Glass finishing:</b>	Clear with inner sandblasting, Metal nanocoating finish
<b>Metal parts:</b>	Polished stainless steel
<b>Canopy included:</b>	No
<b>Usage:</b>	Indoor

## ELECTROTECHNICAL DETAILS

<b>Cord colour:</b>	-
<b>Cord length:</b>	-
<b>Light source type:</b>	1x G9
<b>Socket:</b>	Conventional source
<b>Light source included:</b>	Yes
<b>Colour temperature &amp; Dimming:</b>	2700 K / Dimmable (recommended color temperature)
<b>Input voltage:</b>	220-240 V, 50-60 Hz (CE) / 110-120 V, 50-60 Hz (UL)
<b>Rated power:</b>	max 5 W
<b>Protection rating:</b>	IP20


\* The cable length can be adjusted by shortening the wire. If you require a longer or shorter cord, please reach out to your salesperson for assistance.

\*\* Lighting fixtures are designed for decorative purposes only.

\*\*\* Please contact your salesperson if you require compatibility with the DALI system.

\*\*\*\* For UL-compliant installations, a 4-inch junction box is recommended.

**TECHNICAL DRAWINGS**

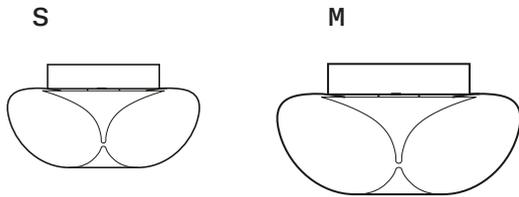

**LIGHT**

SIZE	Dia (mm/in)	Height (mm/in)
S	300/11,81	145/5,71
M	400/15,75	188/7,40

**PACKAGING**

SIZE	Package dimensions (mm/in)	Total weight (incl. packaging kg/lb)
S	390x390x310 / 15.35x15.35x12.20	4 / 8.8
M	500X500X360 / 19.69x19.69x14.17	6 / 13.2

**Attention:**

- \* The product requires professional installation.
- \*\* Warranty period depends on territory.

# SANS SOUCI

**Country of origin:**  
Czech Republic

**Sans Souci s.r.o.**  
Vaclavske nam. 804/58,  
110 00, Prague 1, Czech Republic

[www.sanssoucilighting.com](http://www.sanssoucilighting.com)