










Image shown above 84.14 with round canopy


Series	84
Mounting	Ceiling mounted
Glass Colour	Clear
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 84.1 - 84.9 Non-adjustable Length: 84.11 - 84.61
Canopy Finishes	84.1 - 84.7: white, black or brushed nickel canopy 84.1m: white, black, brushed nickel, or brushed brass canopy 84.9 - 84.61: white canopy
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 84.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US Patent pending EU 003611144-0001 to 0004
Certifications	<div>    </div>

Weight (kg)			
			
Round		Square	
84.1	2	84.11	36.6
84.3	6.5	84.26	69.5
84.5	10.7	84.36	113.4
84.7	15.2		
84.13	29.6		
84.14	40.2		
84.26	67.7		Rectangle
84.36	91.4		
84.19	45.8		
84.37	84.8		
84.61	139		
		84.9	28.2
		84.11	36.6
		84.14	39.5
		84.20	67.7
		84.26	80
		84.36	91.8

ADJUSTABLE LENGTH

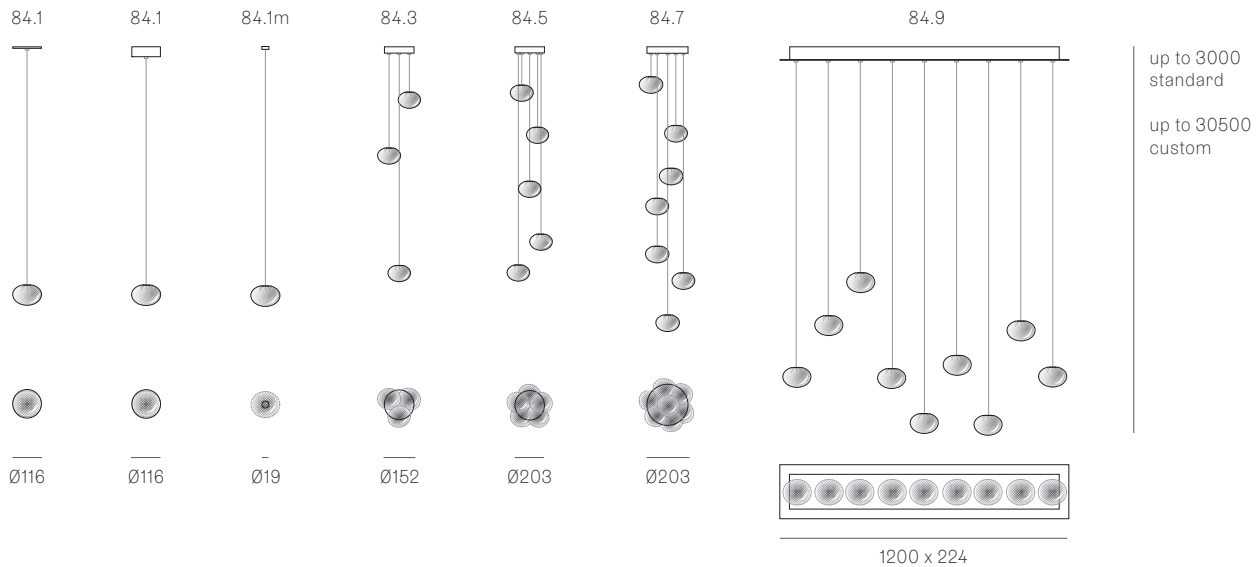

NON-ADJUSTABLE LENGTH


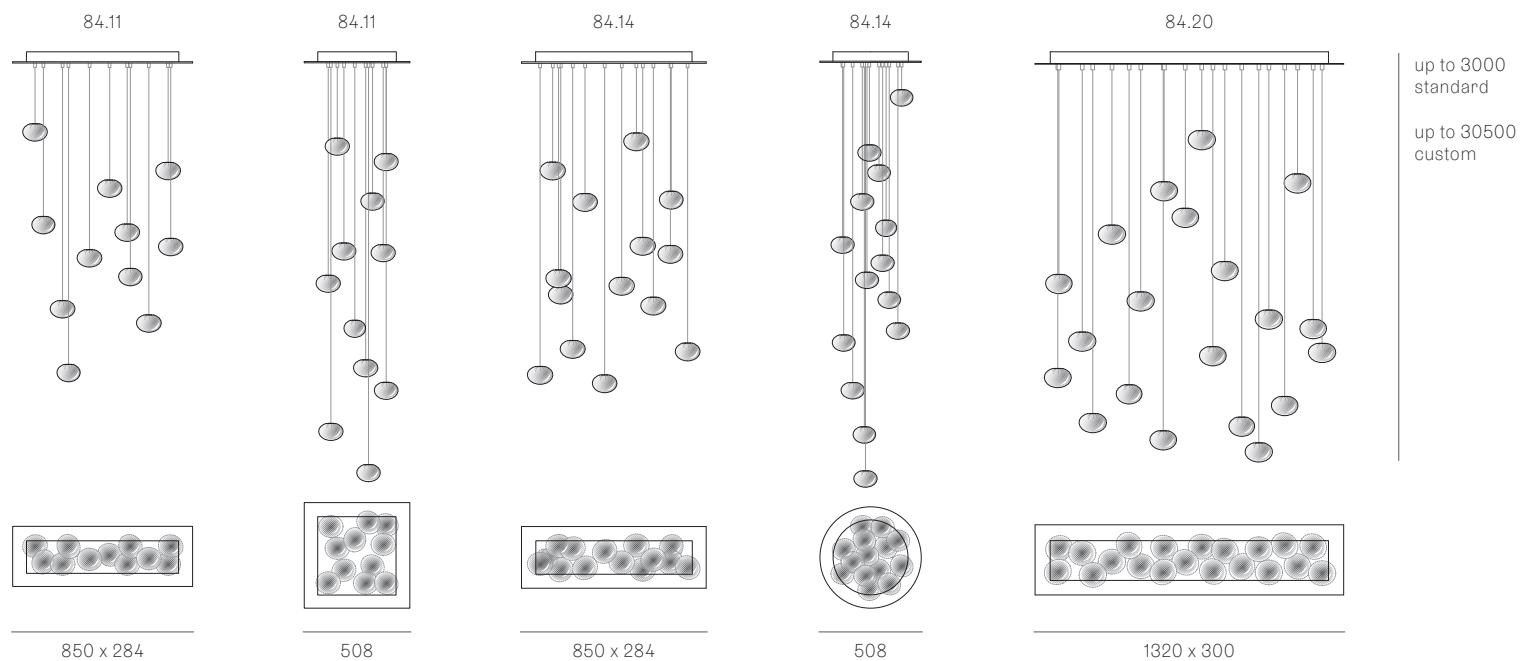


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:



- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.



NON-ADJUSTABLE LENGTH

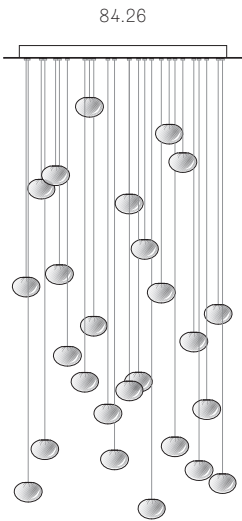




1000 x 335

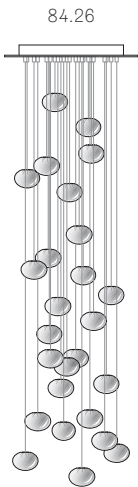

600

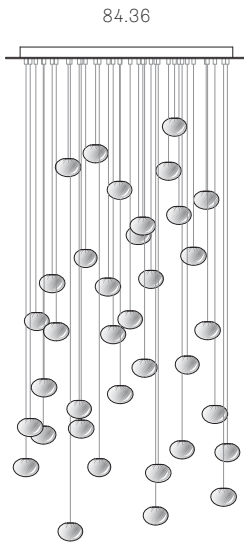

1100 x 370

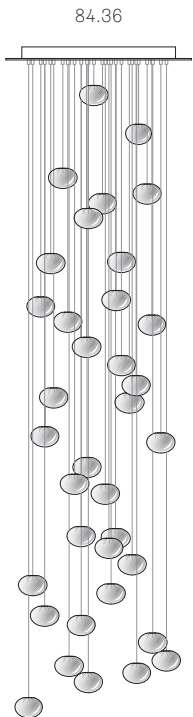

755

up to 3000
standard
up to 30500
custom

All dimensions are in millimeters (mm)
unless otherwise specified.