


IRIS 60 — P

A—N—D

PENDANT

Designed by Caine Heintzman

2024

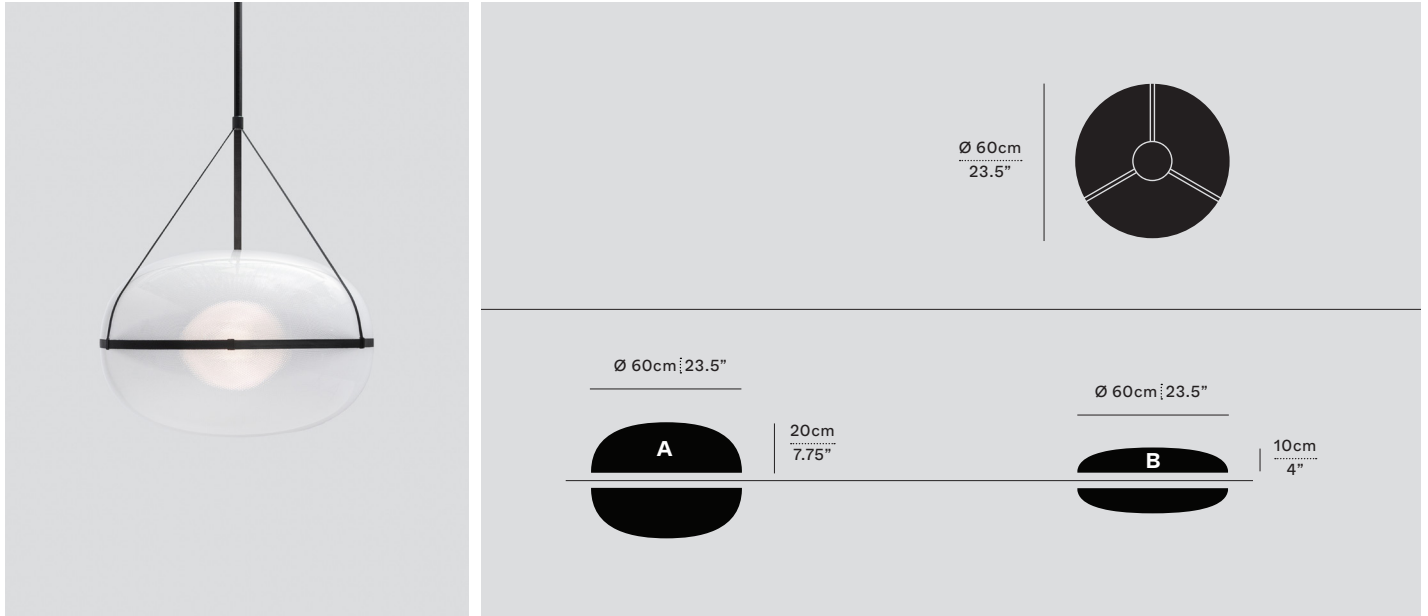

IRI-60-P-A-A-BLK-27-ELV-120

A-N-D.COM

TYPE

Pendant

DIMENSIONS

Combination Dependant

A: Ø 60cm x 20cm / Ø 23.5" x 7.75"

B: Ø 60cm x 10cm / Ø 23.5" x 4"

Adjustable drop length

300cm / 118" – Custom length available

Weight

5kg / 11lbs

3D MODELS

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

MATERIALS

Aluminum, Acrylic, Suspension

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

16W 24V DC LED
CRI 90+, 50,000 hours


Lumens

2632 lumens delivered

Controls

Phase dimming, 0–10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



CANOPY

Ø 15cm x 5cm / Ø 6" x 2" enclosure with surface mounted driver (1), and integrated suspension

MANUFACTURED


Canada

FINISHES



Black (BLK) Silver (SLV)

LENS FINISH



Clear (CLR)



For custom finishes, please inquire.

SERIES	SIZE	TYPE	DOWN	UP	FINISH	CCT	PS	VOLTAGE IN
IRI	60	P	<input type="checkbox"/> A	<input type="checkbox"/> A	<input type="checkbox"/> BLK (BLACK)	<input type="checkbox"/> 27 (2700K)	<input type="checkbox"/> ELV	<input type="checkbox"/> 120
			<input type="checkbox"/> B	<input type="checkbox"/> B	<input type="checkbox"/> SLV (SILVER)	<input type="checkbox"/> 30 (3000K)	<input type="checkbox"/> 010	<input type="checkbox"/> 230
						<input type="checkbox"/> 35 (3500K)	<input type="checkbox"/> DAL	<input type="checkbox"/> 277*
					<input type="checkbox"/> DW (DIM TO WARM)			


*277 only available with 010

IRIS 60 — P


PENDANT

A—N—D


COMBO A/A

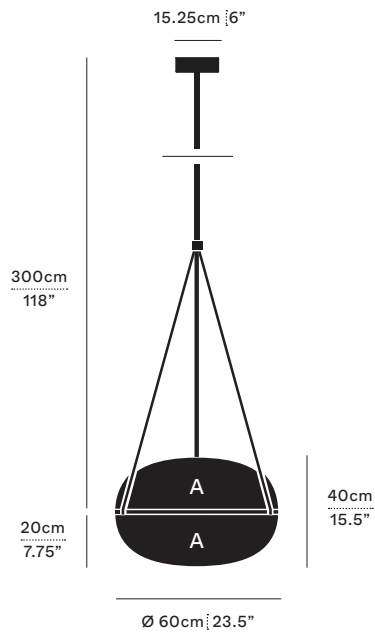

COMBO B/A

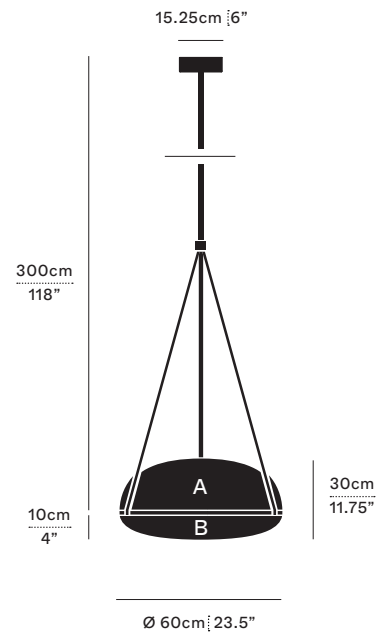

COMBO A/B

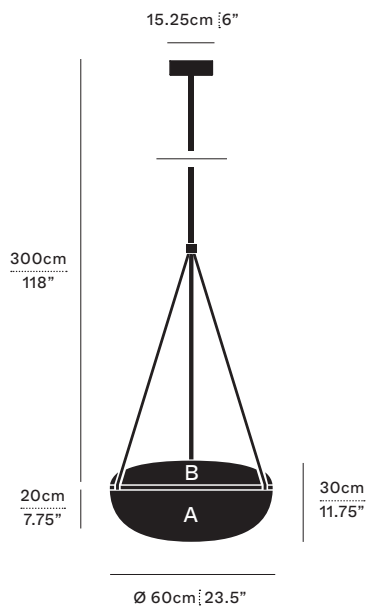

COMBO B/B

