

Image shown above 100.16 with square canopy

± 190mm

<b>Series</b>	100
<b>Mounting</b>	Ceiling mounted
<b>Glass Colours</b>	Frosted clear, frosted grey
<b>Lamp</b>	1.5W LED, 2000K, 130lm 1.5W LED, 2500K, 130lm 1.5W LED, 3500K, 160lm
<b>Coaxial Length</b>	3000mm standard / up to 30500mm maximum Adjustable length: 100.1 - 100.7 Non-adjustable Length: 100.11 - 100.28
<b>Canopy Finishes</b>	100.1 - 100.7: white, black or brushed nickel canopy 100.1mi/mo: white polyurethane canopy 100.11 - 100.28: white canopy
<b>Materials</b>	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
<b>Power Supply</b>	Integral Remote mounted for 100.1m/mo/mi  Bocci recommends remote mounting power supplies for ease of long-term maintenance.
<b>Environment</b>	Indoor, dry location. IP30
<b>Note</b>	Unless otherwise noted when ordering, all fixtures will be outfitted with 2500K lamps.  Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
<b>Patent #</b>	US Patent pending EU 008526131-0001


**Weight (kg)**

○		□	
Round		Square	
<b>100.1</b>	2.8	<b>100.11</b>	38.1
<b>100.3</b>	7.7	<b>100.16</b>	53
<b>100.5</b>	12.1	<b>100.28</b>	87
<b>100.7</b>	17.2		
<b>100.11</b>	38		
<b>100.20</b>	64.8	□	
		Rectangle	
		<b>100.11</b>	37.6
		<b>100.16</b>	54.2
		<b>100.20</b>	64.4
		<b>100.28</b>	87.9

**Certifications**




ADJUSTABLE LENGTH

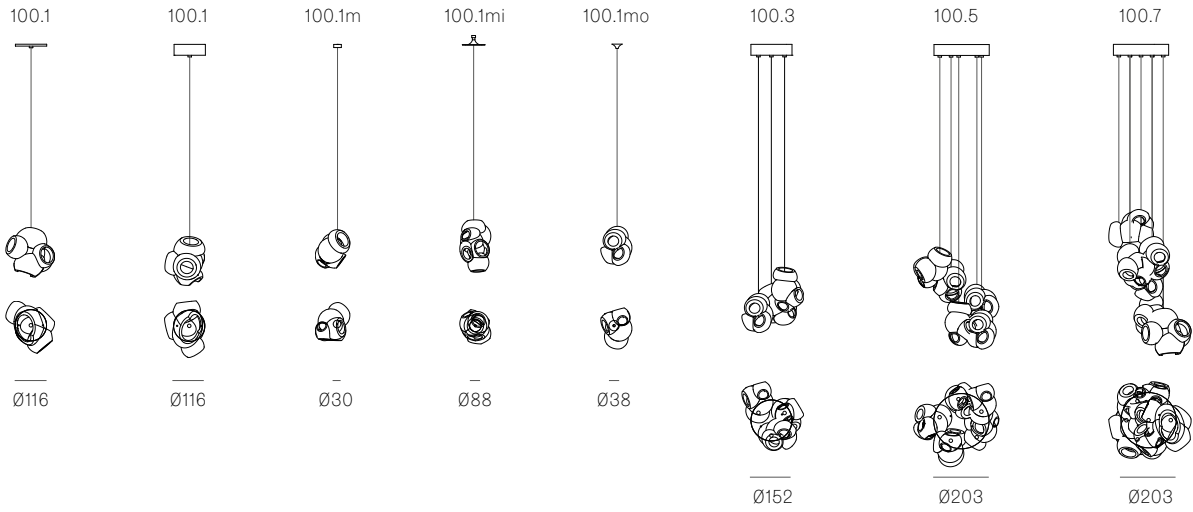

up to 3000 standard  
up to 30500 custom

NON-ADJUSTABLE LENGTH

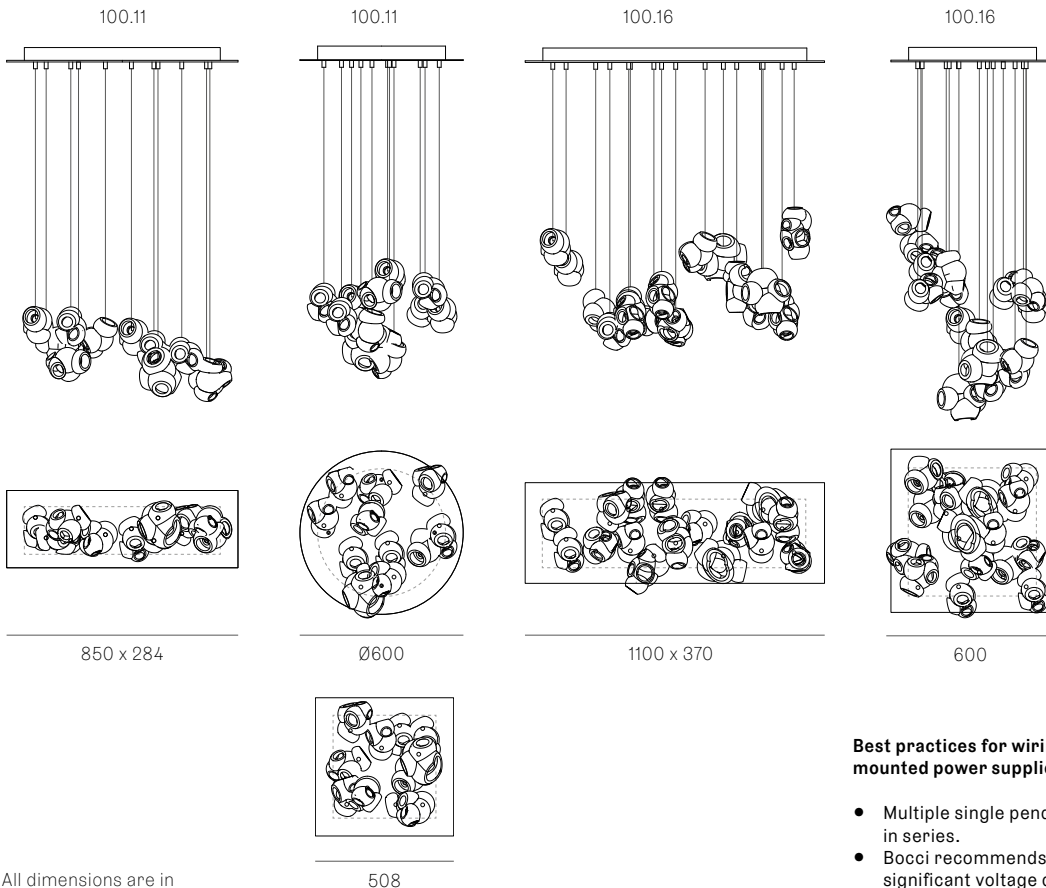

up to 3000 standard  
up to 30500 custom


All dimensions are in millimeters (mm) unless otherwise specified.

**Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:**

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.


NON-ADJUSTABLE LENGTH

100.20

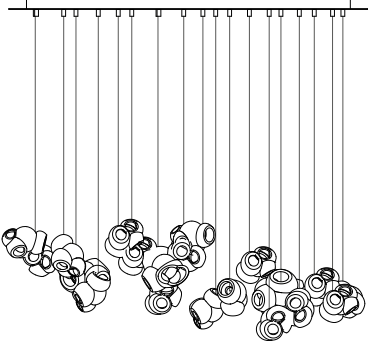



1320 x 300

100.20

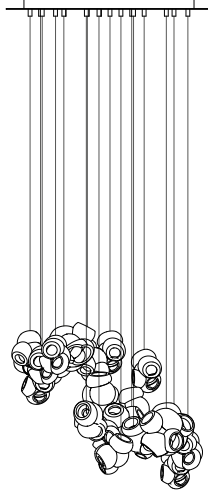



Ø755

100.28

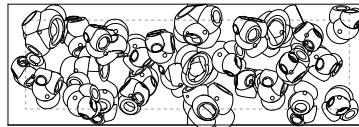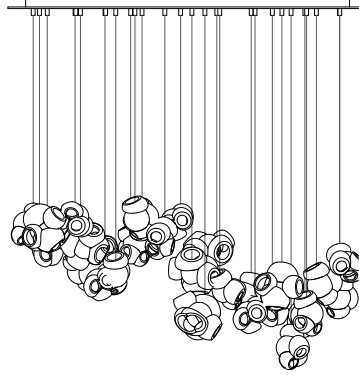

1320 x 444

100.28

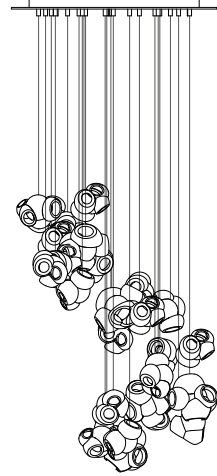

755

up to 3000  
standard

up to 30500  
custom

All dimensions are in millimeters (mm)  
unless otherwise specified.