

RH

THADDEUS ROUND CHANDELIER 36"


ASSEMBLY & INSTALLATION INSTRUCTIONS

UNITED STATES ENGLISH

THADDEUS ROUND CHANDELIER 36"

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) Chain 6' (1)
- (D) Fasteners (2)
- (E) Loop (1)
- (F) Threaded Rod (1)
- (G) Glass Crystals (6)
- (H) Chandelier Body (1)

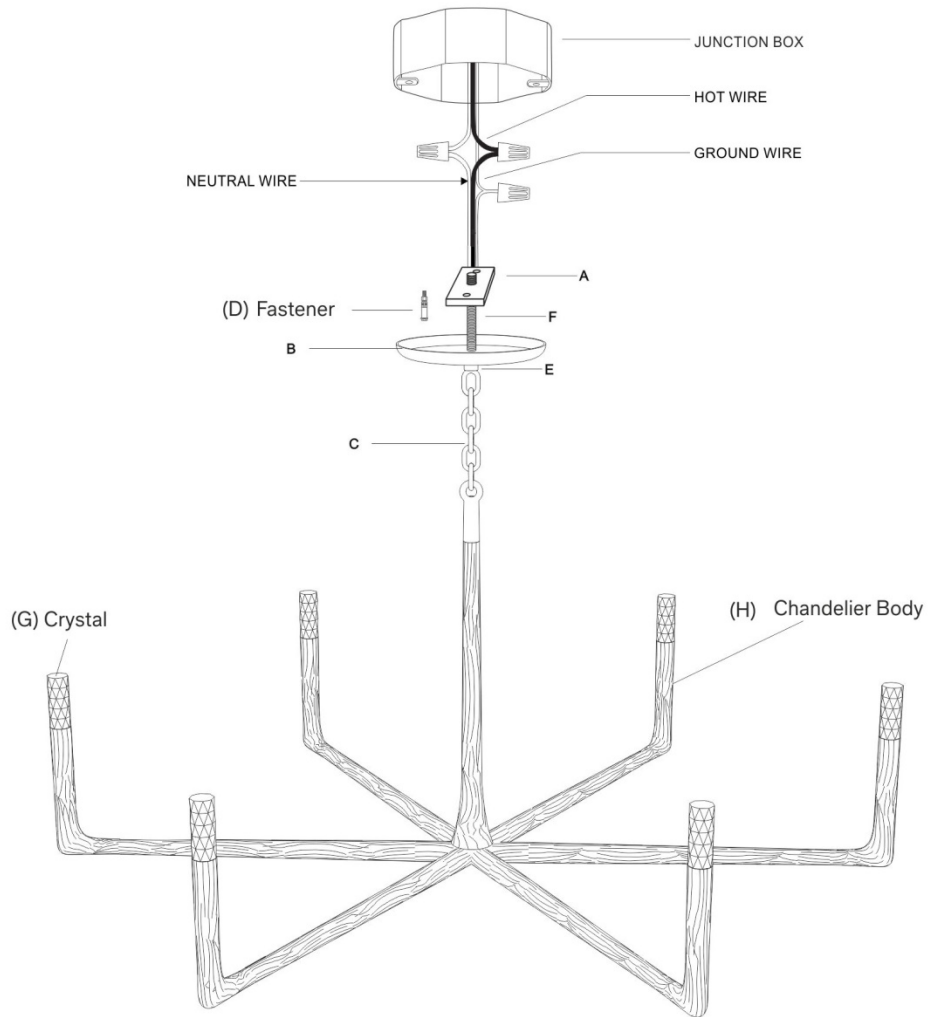

IMPORTANT: PLEASE READ

PLEASE FOLLOW THE ASSEMBLY INSTRUCTIONS CLOSELY. IMPROPER ASSEMBLY OR INSTALLATION CAN RESULT IN PERSONAL OR PROPERTY DAMAGE. MOUNTING HARDWARE HAS BEEN PROVIDED FOR MOUNTING TO A WOODEN STRUCTURAL BEAM. UNIQUE OR ALTERNATIVE INSTALLATION METHODS MAY REQUIRE DIFFERENT MOUNTING HARDWARE, WHICH HAS NOT BEEN INCLUDED. ALWAYS CONSULT WITH A LICENSED ELECTRICIAN BEFORE INSTALLATION.

INSTALLATION BY A LICENSED ELECTRICIAN IS STRONGLY RECOMMENDED.

IMPORTANT SAFETY FEATURES

BULBS

This fixture has been rated for up to (6) 20-watt maximum Type T standard lightbulbs (not included) or up to (6) 4-watt LED bulbs (included). To avoid the risk of fire, do not exceed the recommended wattage.

VAULTED-CEILING COMPATIBILITY

This fixture is not vaulted-ceiling compatible.

DIMMER-SWITCH COMPATIBILITY

This fixture is not dimmer-switch compatible.

CEILING REINFORCEMENT

Fixtures weighing 50 lbs. or more will require additional reinforcement above the ceiling where they are to be installed.

WARNINGS

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch the bulbs when fixture is turned on or look directly at lit bulbs. Keep flammable materials away from lit bulbs.

WARNING: STRANGULATION HAZARD

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.


THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

INSTALLING THE SAFETY CABLE:

Trim wires leaving at least 6" to make electrical connection. Strip ends of 3/4" insulation. Attach bare (or green) ground wire from fixture to bare (or green) ground wire in junction box using a wire connector. Wrap both around green ground screw on mounting bracket and firmly tighten.

⚠️ TO AVOID ELECTRICAL SHOCK, WIRE FOR CORRECT POLARITY: Connect BLACK wires (or smooth) to *BLACK. Connect WHITE (or ribbed along the edge) wires to WHITE. Firmly secure with Wire Connectors. SEE INSET BELOW:

* Black wire may be red in some installations.

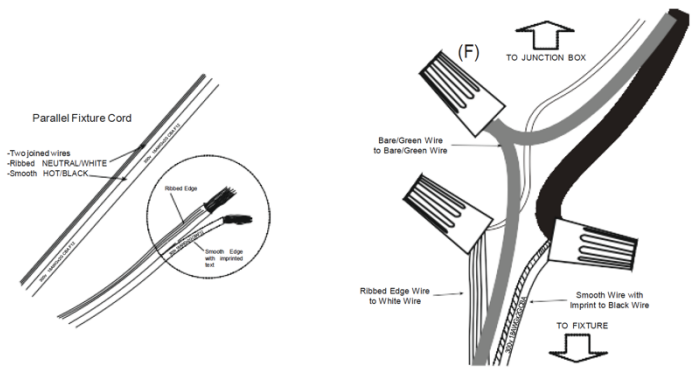

ASSEMBLY AND INSTALLATION**SHUT OFF THE MAIN ELECTRICAL SUPPLY
FROM THE FUSE BOX OR CIRCUIT BREAKER**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Attach Mounting Plate (A) to ceiling and secure with Fasteners (D).
3. Attach Threaded Rod (F) to Mounting Plate (A).
4. Attach Chains (C) to Chandelier Body (H).
5. Remove rings from Loop (E), then feed wire and chains to through rings.
6. Feed wires and chain through Canopy (B) to Loop (E) wires. Chains will come out on the back side of Canopy.
7. Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering – this is the NEUTRAL WIRE. The second wire's covering is smooth – this is the HOT WIRE. The bare wire is the GROUND WIRE.
8. Connect the GROUND WIRE from the fixture to the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. Connect the NEUTRAL WIRE from your fixture to the neutral wire (usually white) from your ceiling box using a wire nut.
10. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a wire nut. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
11. Tuck the wire connection neatly into the ceiling outlet box.
12. Remove stoppers from safety wire and feed them through Loop (E).
13. Secure safety wire with Mounting Plate (A) and reattach stopper to ends of the wires.
14. Hold Canopy (B) to the ceiling and secure it by tightening the rings on the Loop (E).
15. Place the Glass Crystals (G) on the chandelier.
16. Assembly is complete.

CARE INSTRUCTIONS

Wipe all surfaces with a soft, dry cloth. Clean glass with a mixture of mild soap and water. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.

Use pointed pliers to change the lightbulbs.


ATTENTION: ADJUSTING THE HANG HEIGHT

Any adjustments or alterations to the fixture, cord, or overall hang height that differ from those detailed on RH.com will void the Laboratory Listing and Approvals (UL, ETL, CSA, etc.). If the listing is voided, this means the product may no longer be safe for use as modified. RH does not recommend modifying the product.

HEIGHT ADJUSTMENT INSTRUCTIONS

Determine drop measurement (ceiling to bottom of fixture) and adjust Chain (C) by adding/removing links. Open Lock Buckle and attach one end to Loop on top of Chandelier Body (H). Slide Loop (E), followed by Canopy (B), down Chain and allow them rest on top of Fixture.

Open Lock Buckle on other end of Chain, then lift and hang entire Fixture from Canopy Loop (E).

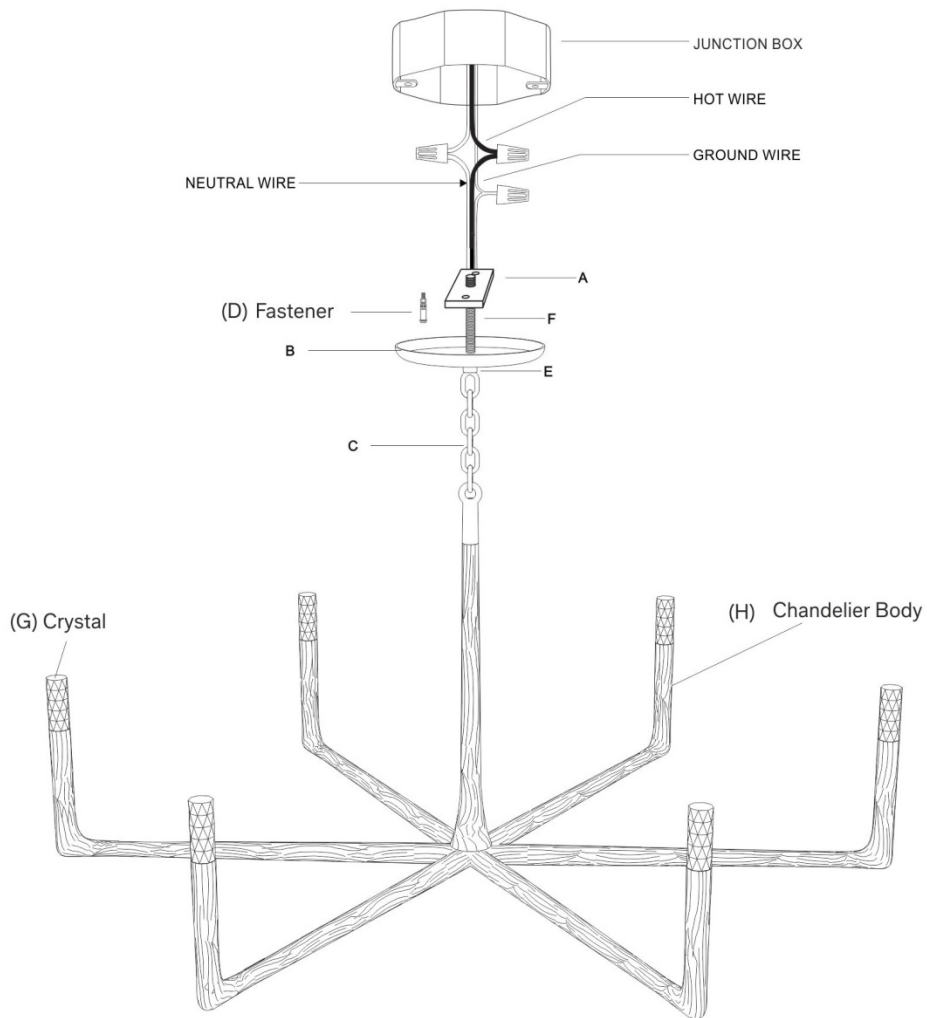


RH

THADDEUS ROUND CHANDELIER 48"

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) Chain 6' (1)
- (D) Fastener (2)
- (E) Loop (1)
- (F) Nipple (1)
- (G) Crystal (6)
- (H) Chandelier Body

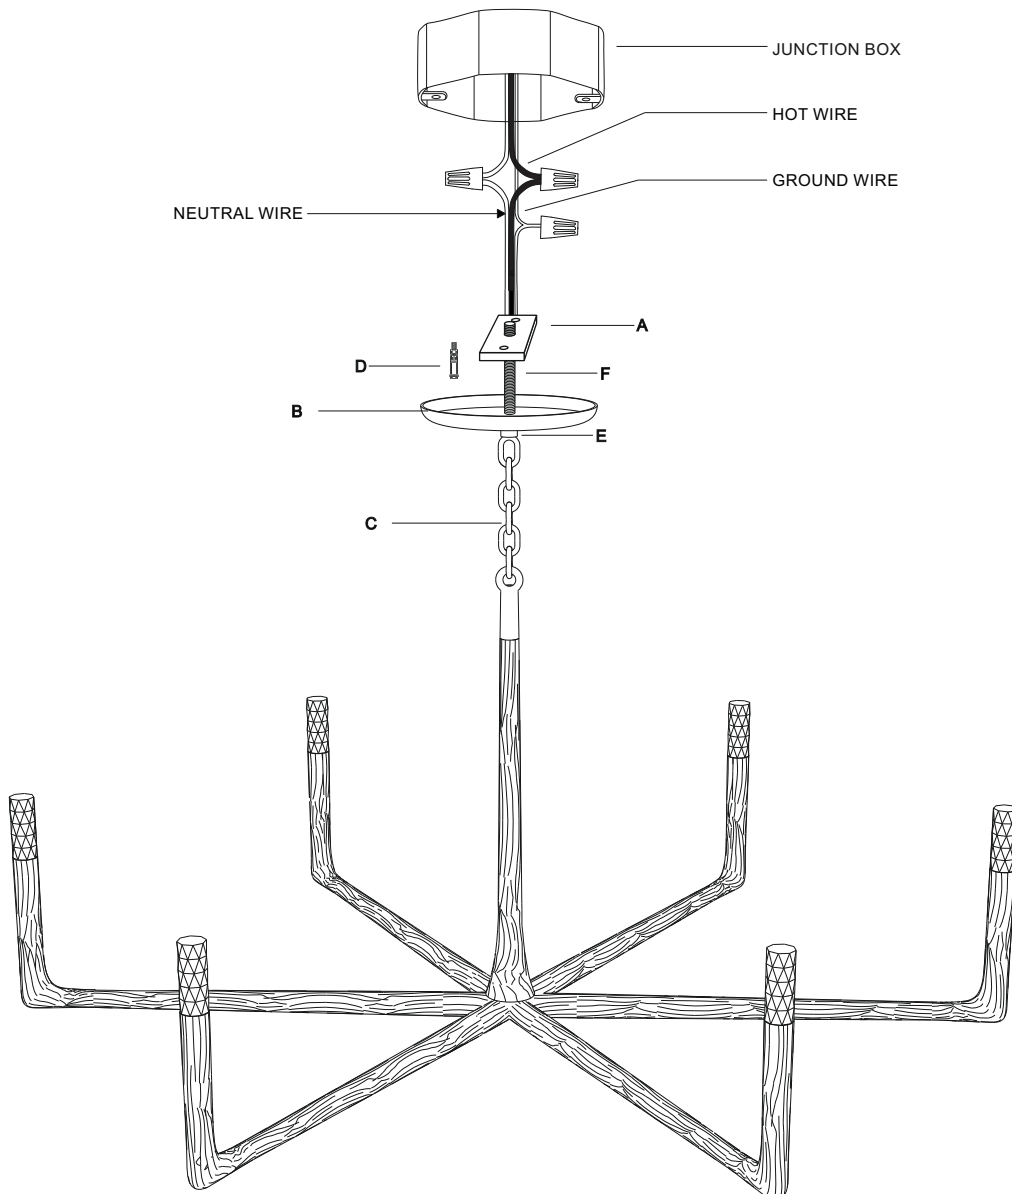

RH

THADDEUS ROUND CHANDELIER 48"

IMPORTANT SAFETY INSTRUCTIONS


PROFESSIONAL INSTALLATION IS STRONGLY RECOMMENDED.

This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member. This fixture **MUST NOT** be secured using any type or hollow ceiling anchor, such as a toggle bolt.

This fixture has been rated for up to six (6) 20-watt maximum Type T standard lightbulbs or six (6) 3.5-watt LED bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. when unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch the bulbs when fixture is turned on or look directly at lit bulbs. Keep flammable materials away from lit bulbs.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

 **WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Attach Mounting Plate (A) to ceiling and secure with Fasteners (D).
3. Attach Nipple (F) to Mounting Plate (A).
4. Attach Chains (C) to Chandelier Body (H).
5. Remove rings from Loop (E), then feed wire and chains through rings.
6. Feed wires and chain through Canopy (B) to Loop (E) wires. Chains will come out on the back side of Canopy.
7. Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering - this is the **NEUTRAL WIRE**. The second wire's covering is smooth - this is the **HOT WIRE**. The bare wire is the **GROUND WIRE**.
8. Connect the **GROUND WIRE** from the fixture to the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the **GROUND WIRE** from the fixture to the green grounding screw inside of the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
9. Connect the **NEUTRAL WIRE** from your fixture to the neutral wire (usually white) from your ceiling box using a wire nut.
10. Connect the **HOT WIRE** from your fixture with the hot wire (usually black) from your outlet box using a wire nut. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
11. Tuck the wire connection neatly into the ceiling outlet box.
12. Remove stoppers from safety wire and feed them through Loop (E).
13. Secure safety wire with Mounting Plates (A) and attach stopper again to ends of the wires.
14. Hold Canopy (B) to the ceiling and secure it by tightening the rings on the Loop (E).
15. Place the Glass Crystals (G) on the chandelier.
16. Assembly is complete.

CARE INSTRUCTIONS

Wipes all surfaces with a soft, dry cloth. Clean glass with mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.


Use pointed pliers to change the bulbs.

RH

THADDEUS ROUND CHANDELIER 60"

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) Chain 6' (1)
- (D) Fastener (2)
- (E) Loop (1)
- (F) Nipple (1)
- (G) Crystal (8)
- (H) Chandelier Body

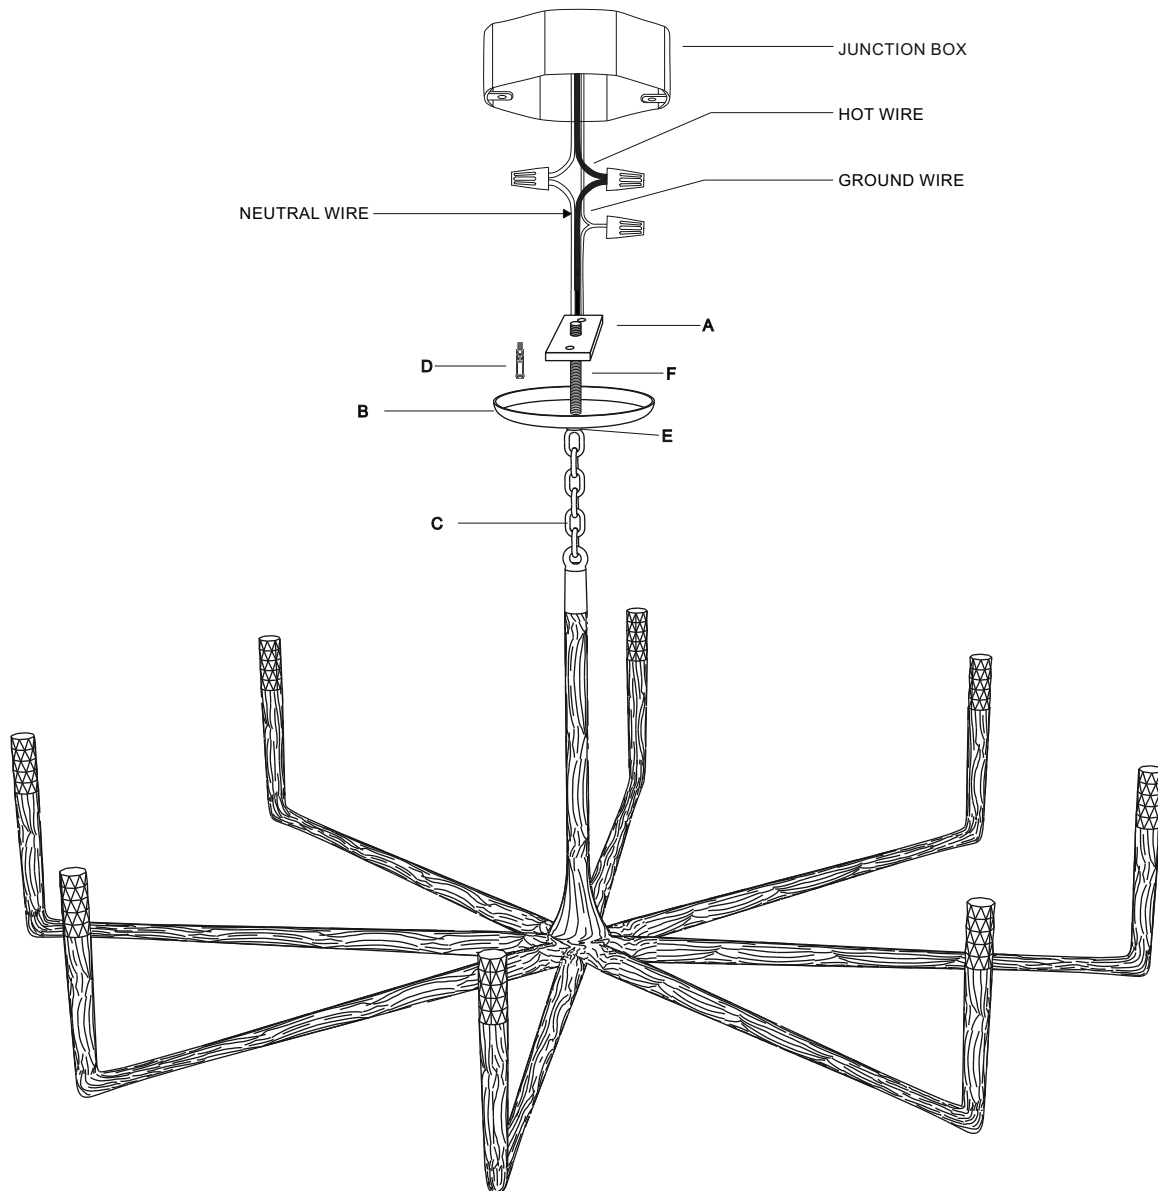

RH

THADDEUS ROUND CHANDELIER 60"

IMPORTANT SAFETY INSTRUCTIONS


PROFESSIONAL INSTALLATION IS STRONGLY RECOMMENDED.

This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member. This fixture **MUST NOT** be secured using any type or hollow ceiling anchor, such as a toggle bolt.

This fixture has been rated for up to eight (8) 20-watt maximum Type T standard lightbulbs or eight (8) 3.5-watt LED bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. when unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch the bulbs when fixture is turned on or look directly at lit bulbs. Keep flammable materials away from lit bulbs.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

 **WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Attach Mounting Plate (A) to ceiling and secure with Fasteners (D).
3. Attach Nipple (F) to Mounting Plate (A).
4. Attach Chains (C) to Chandelier Body (H).
5. Remove rings from Loop (E), then feed wire and chains through rings.
6. Feed wires and chain through Canopy (B) to Loop (E) wires. Chains will come out on the back side of Canopy.
7. Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering - this is the **NEUTRAL WIRE**. The second wire's covering is smooth - this is the **HOT WIRE**. The bare wire is the **GROUND WIRE**.
8. Connect the **GROUND WIRE** from the fixture to the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the **GROUND WIRE** from the fixture to the green grounding screw inside of the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
9. Connect the **NEUTRAL WIRE** from your fixture to the neutral wire (usually white) from your ceiling box using a wire nut.
10. Connect the **HOT WIRE** from your fixture with the hot wire (usually black) from your outlet box using a wire nut. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
11. Tuck the wire connection neatly into the ceiling outlet box.
12. Remove stoppers from safety wire and feed them through Loop (E).
13. Secure safety wire with Mounting Plates (A) and attach stopper again to ends of the wires.
14. Hold Canopy (B) to the ceiling and secure it by tightening the rings on the Loop (E).
15. Place the Glass Crystals (G) on the chandelier.
16. Assembly is complete.

CARE INSTRUCTIONS

Wipes all surfaces with a soft, dry cloth. Clean glass with mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.


Use pointed pliers to change the bulbs.

RH

THADDEUS ROUND CHANDELIER 72"

PARTS ENCLOSED

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) Chain 6' (1)
- (D) Fastener (2)
- (E) Loop (1)
- (F) Nipple (1)
- (G) Crystal (8)
- (H) Chandelier Body

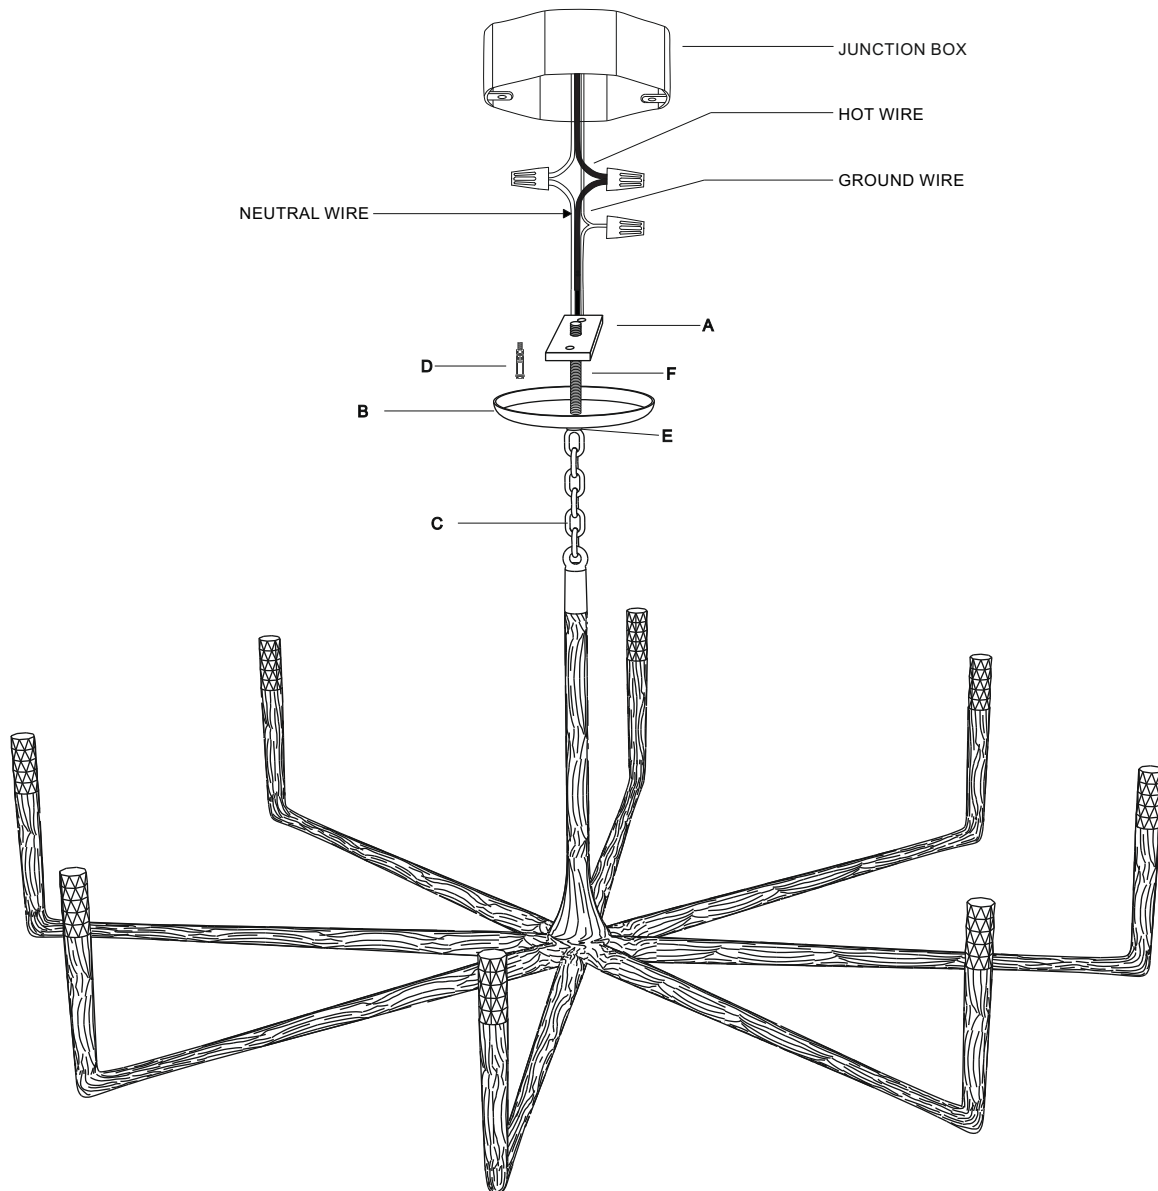

RH

THADDEUS ROUND CHANDELIER 72"

IMPORTANT SAFETY INSTRUCTIONS


PROFESSIONAL INSTALLATION IS STRONGLY RECOMMENDED.

This fixture must be mounted to the ceiling independent of an outlet box. Your ceiling may require modification to allow the mounting plate to be secured to a structural member. This fixture **MUST NOT** be secured using any type or hollow ceiling anchor, such as a toggle bolt.

This fixture has been rated for up to eight (8) 20-watt maximum Type T standard light bulbs or eight (8) 3.5-watt LED bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS

All wires are connected. when unpacking, ~~be~~ careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulbs. Do not touch the bulbs when fixture is turned on or look directly at lit bulbs. Keep flammable materials away from lit bulbs.

 **WARNING:** This product can expose you to lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

 **WARNING: STRANGULATION HAZARD**

Keep cord at least 3 feet away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.

ASSEMBLY & INSTALLATION

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Attach Mounting Plate (A) to ceiling and secure with Fasteners (D).
3. Attach Nipple (F) to Mounting Plate (A).
4. Attach Chains (C) to Chandelier Body (H).
5. Remove rings from Loop (E), then feed wire and chains through rings.
6. Feed wires and chain through Canopy (B) to Loop (E) wires. Chains will come out on the back side of Canopy.
7. Carefully inspect the chandelier's two fixture wires. One has very fine ridges molded into the plastic covering- This is the NEUTRAL WIRE. The second wire's covering is smooth- this is the HOT WIRE. The bare wire is the GROUND WIRE.
8. Connect the GROUND WIRE from the fixture to the ground wire (usually bare) from your ceiling box using a wire nut. If your house does not have ground wire, then attach the GROUND WIRE from the fixture to the green grounding screw inside of the outlet box. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
9. Connect the NEUTRAL WIRE from your fixture to the neutral wire (usually white) from your ceiling box using a wire nut.
10. Connect the HOT WIRE from your fixture with the hot wire (usually black) from your outlet box using a wire nut. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
11. Tuck the wire connection neatly into the ceiling outlet box.
12. Remove stoppers from safety wire and feed them through Loop (E).
13. Secure safety wire with Mounting Plates (A) and attach stopper again to ends of the wires.
14. Hold Canopy (B) to the ceiling and secure it by tightening the rings on the Loop (E).
15. Place the Glass Crystals (G) on the chandelier.
16. Assembly is complete.

CARE INSTRUCTIONS

Wipes all surfaces with a soft, dry cloth. Clean glass with mild soap and water mixture. Do not use any harsh cleaners (including ammonia-based products) or abrasives, as they will damage the finish.

Use pointed pliers to change the bulbs.